


TO SOUND
MODULE A8



NOTES:

1. ALL RESISTORS ARE 1/4 W, ±5%.
2. ALL CAPACITORS ARE IN MFD'S, UNLESS INDICATED OTHERWISE.
3. U1 THROUGH U7 CAN BE ANY COMBINATION OF 2Kx8 OR 4Kx8 ROM'S OR EPROMS, THE PARTICULAR CONFIGURATION BEING ACCOMODATED BY J9 PROGRAM AND JUMPER FOLLOWS: 2Kx8 ROM (G19316B OR EQUIV.) JUMPERS D & A, 2Kx8 EPROM (INTEL 2716 OR EQUIV.) JUMPERS D & A, 4Kx8 ROM (G190-3-9332B OR EQUIV.) JUMPERS D & B, 4Kx8 EPROM (INTEL 2732 OR EQUIV.) JUMPERS C & A.
4. PREFIX ALL REFERENCE DESIGNATIONS WITH A10.

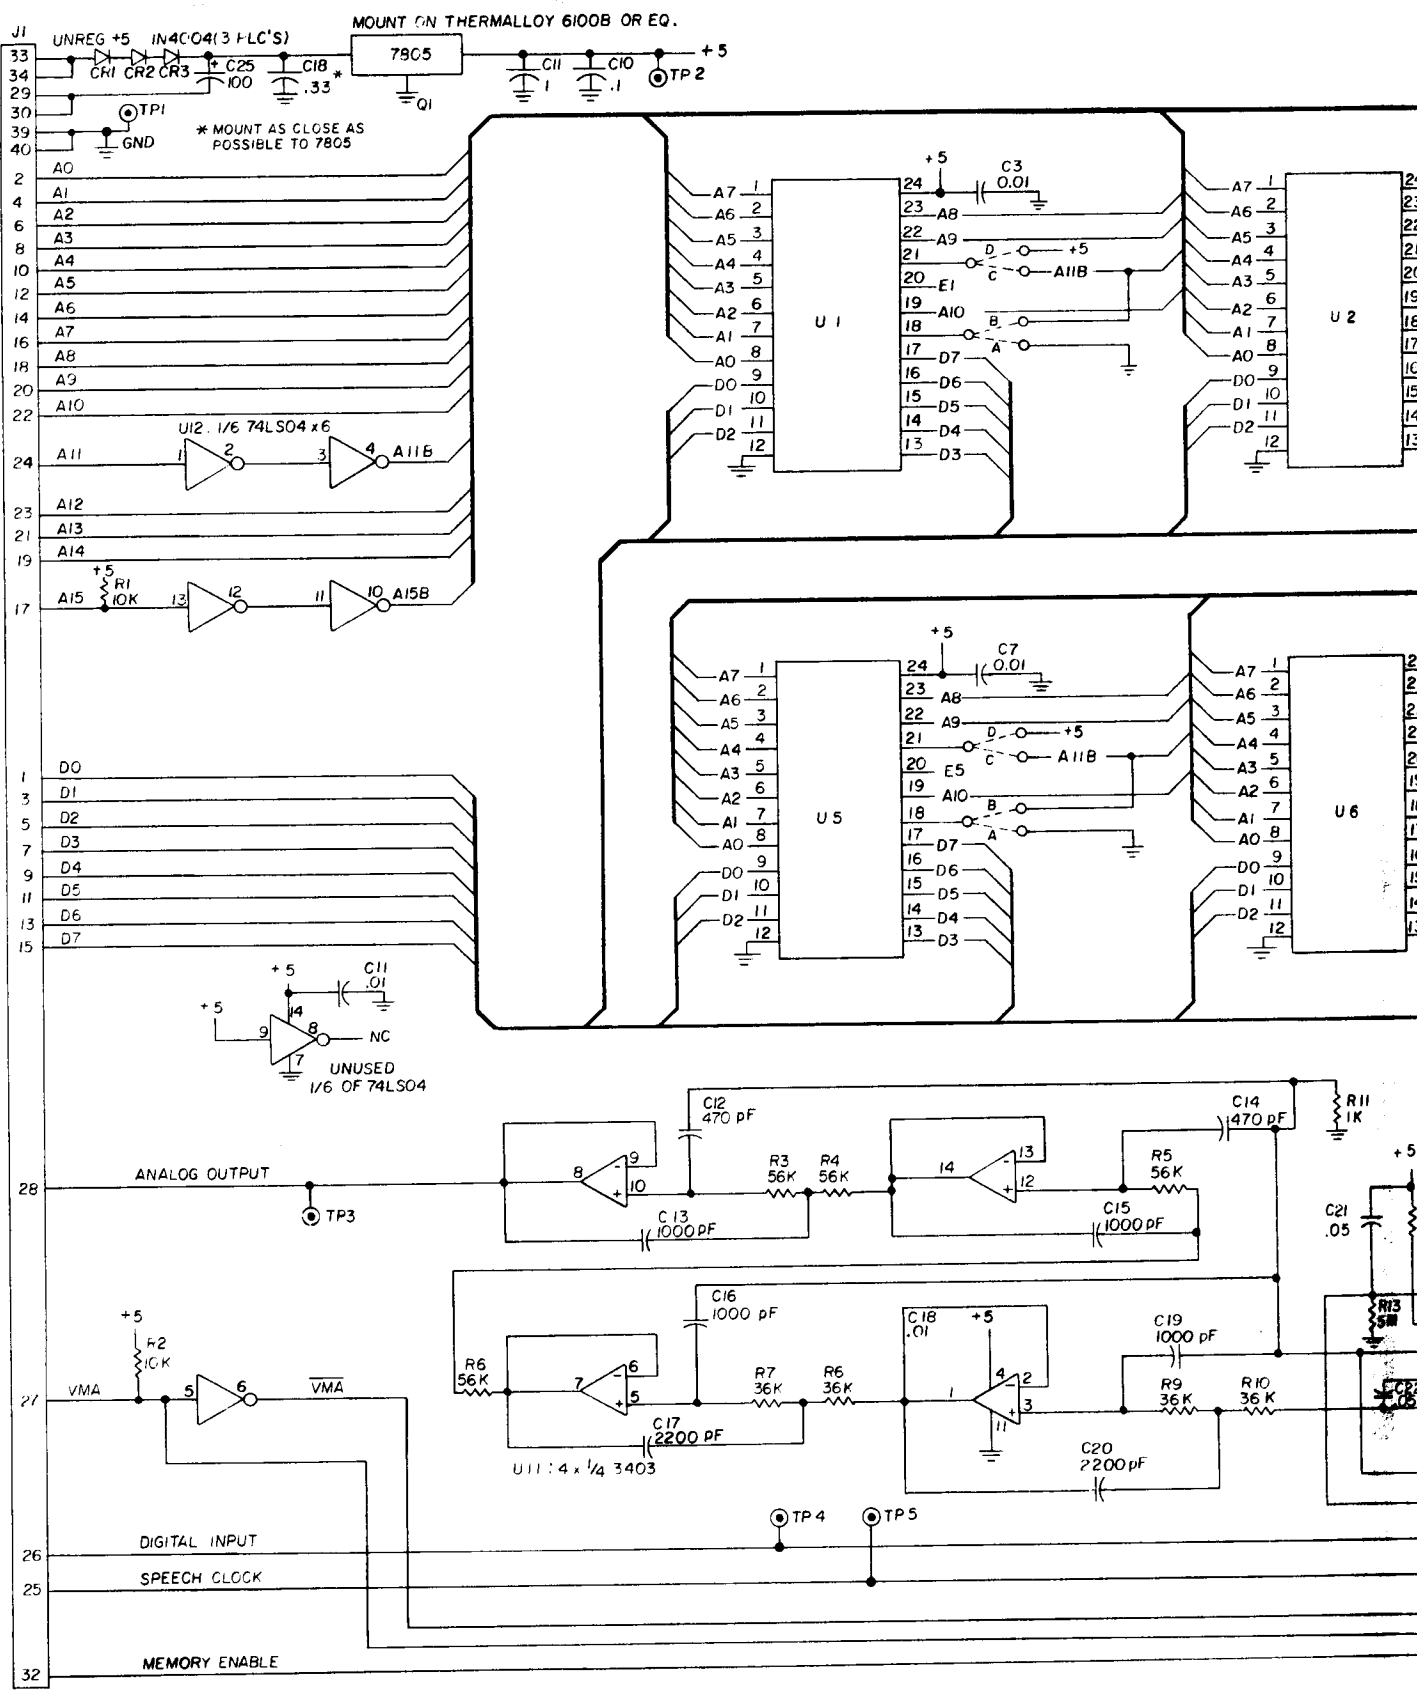