

SECTION 9 REPLACEABLE
ELECTRICAL
PARTS

REPLACEABLE ELECTRICAL PARTS

PARTS ORDERING INFORMATION

Replacement parts are available from or through your local Tektronix, Inc. Field Office or representative.

Changes to Tektronix instruments are sometimes made to accommodate improved components as they become available, and to give you the benefit of the latest circuit improvements developed in our engineering department. It is therefore important, when ordering parts, to include the following information in your order: Part number, instrument type or number, serial number, and modification number if applicable.

If a part you have ordered has been replaced with a new or improved part, your local Tektronix, Inc. Field Office or representative will contact you concerning any change in part number.

Change information, if any, is located at the rear of this manual.

LIST OF ASSEMBLIES

A list of assemblies can be found at the beginning of the Electrical Parts List. The assemblies are listed in numerical order. When the complete component number of a part is known, this list will identify the assembly in which the part is located.

CROSS INDEX-MFR. CODE NUMBER TO MANUFACTURER



The Mfr. Code Number to Manufacturer index for the Electrical Parts List is located immediately after this page. The Cross Index provides codes, names and addresses of manufacturers of components listed in the Electrical Parts List.

ABBREVIATIONS

Abbreviations conform to American National Standard Y1.1.

COMPONENT NUMBER (column one of the Electrical Parts List)

A numbering method has been used to identify assemblies, subassemblies and parts. Examples of this numbering method and typical expansions are illustrated by the following:

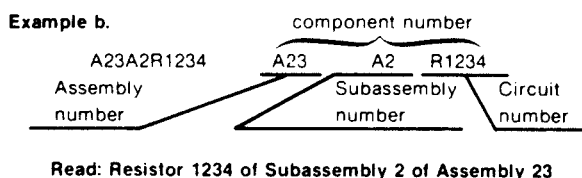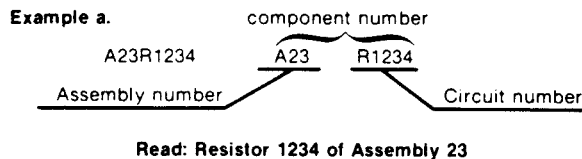

Only the circuit number will appear on the diagrams and circuit board illustrations. Each diagram and circuit board illustration is clearly marked with the assembly number. Assembly numbers are also marked on the mechanical exploded views located in the Mechanical Parts List. The component number is obtained by adding the assembly number prefix to the circuit number.

The Electrical Parts List is divided and arranged by assemblies in numerical sequence (e.g., assembly A1 with its subassemblies and parts, precedes assembly A2 with its subassemblies and parts).

Chassis-mounted parts have no assembly number prefix and are located at the end of the Electrical Parts List.

TEKTRONIX PART NO. (column two of the Electrical Parts List)

Indicates part number to be used when ordering replacement part from Tektronix.

SERIAL/MODEL NO. (columns three and four of the Electrical Parts List)

Column three (3) indicates the serial number at which the part was first used. Column four (4) indicates the serial number at which the part was removed. No serial number entered indicates part is good for all serial numbers.

NAME & DESCRIPTION (column five of the Electrical Parts List)

In the Parts List, an Item Name is separated from the description by a colon (:). Because of space limitations, an Item Name may sometimes appear as incomplete. For further Item Name identification, the U.S. Federal Cataloging Handbook H6-1 can be utilized where possible.

MFR. CODE (column six of the Electrical Parts List)

Indicates the code number of the actual manufacturer of the part. (Code to name and address cross reference can be found immediately after this page.)

MFR. PART NUMBER (column seven of the Electrical Parts List)

Indicates actual manufacturers part number.

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
00213	NYTRONICS COMPONENTS GROUP INC SUBSIDIARY OF NYTRONICS INC	ORANGE ST	DARLINGTON SC 29532
00681	MINE SAFETY APPLIANCE CO CATALYST RESEARCH DIV	1421 CLARKVIEW RD	BALTIMORE MD 21209-2103
00779	AMP INC	2800 FULLING MILL PO BOX 3608	HARRISBURG PA 17105
00853	SANGAMO WESTON INC COMPONENTS DIV	SANGAMO RD PO BOX 128	PICKENS SC 29671-9716
01121	ALLEN-BRADLEY CO	1201 SOUTH 2ND ST	MILWAUKEE WI 53204-2410
01295	TEXAS INSTRUMENTS INC SEMICONDUCTOR GROUP	13500 N CENTRAL EXP PO BOX 655012	DALLAS TX 75265
01537	MOTOROLA COMMUNICATIONS AND ELECTRONICS INC	2553 N EDGINGTON ST	FRANKLIN PARK IL 60131-3401
01961	VARIAN ASSOCIATES INC PULSE ENGINEERING SUBSIDIARY	7250 CONVOY CT P O BOX 12235	SAN DIEGO CA 92112
02113	COILCRAFT INC	1102 SILVER LAKE RD	CARY IL 60013-1658
02289	HI-G CO INC SUB OF NYTRONICS INC	101 LOCUST ST	HARTFORD CT 06114-1504
02735	RCA CORP SOLID STATE DIVISION	ROUTE 202	SOMERVILLE NJ 08876
03508	GENERAL ELECTRIC CO SEMI-CONDUCTOR PRODUCTS DEPT	W GENESEE ST	AUBURN NY 13021
04099	CAPCO INC	1328 WINTERS AVE PO BOX 1028	GRAND JUNCTION CO 81502
04222	AVX CERAMICS DIV OF AVX CORP	19TH AVE SOUTH P O BOX 867	MYRTLE BEACH SC 29577
04713	MOTOROLA INC SEMICONDUCTOR PRODUCTS SECTOR	5005 E MCDOWELL RD	PHOENIX AZ 85008-4229
05347	ULTRONIX INC	461 N 22ND ST PO BOX 1090	GRAND JUNCTION CO 81502
05397	UNION CARBIDE CORP MATERIALS SYSTEMS DIV	11901 MADISON AVE	CLEVELAND OH 44101
05574	VIKING CONNECTORS INC SUB OF CRITON CORP	21001 NORDHOFF ST	CHATSORTH CA 91311-5911
05828	GENERAL INSTRUMENT CORP GOVERNMENT SYSTEMS DIV	600 W JOHN ST	HICKSVILLE NY 11802
06665	PRECISION MONOLITHICS INC SUB OF BOURNS INC	1500 SPACE PARK DR	SANTA CLARA CA 95050
07263	FAIRCHILD SEMICONDUCTOR CORP NORTH AMERICAN SALES	10400 RIDGEVIEW CT	CUPERTINO CA 95014
07716	SUB OF SCHLUMBERGER LTD MS 118 TRW INC	2850 MT PLEASANT AVE	BURLINGTON IA 52601
08261	TRW IRC FIXED RESISTORS/BURLINGTON		
09353	SPECTRA-STRIP AN ELTRA CO	7100 LAMPSON AVE	GARDEN GROVE CA 92642
11236	C AND K COMPONENTS INC CTS CORP	15 RIVERDALE AVE	NEWTON MA 02158-1057
	BERNE DIV	406 PARR ROAD	BERNE IN 46711-9506
	THICK FILM PRODUCTS GROUP		
12954	MICROSEMI CORP - SCOTTSDALE	8700 E THOMAS RD P O BOX 1390	SCOTTSDALE AZ 85252
12969	UNITRODE CORP	5 FORBES RD	LEXINGTON MA 02173-7305
13409	SENSITRON SEMICONDUCTOR DIV OF RSM ELECTRON POWER INC	221 W INDUSTRY COURT	DEER PARK NY 11729-4605
13606	SPRAGUE ELECTRIC CO	70 PEMBROKE RD	CONCORD NH 03301-5755
14193	CAL-R INC	1601 OLYMPIC BLVD PO BOX 1397	SANTA MONICA CA 90406
14433	ITT SEMICONDUCTORS DIV		WEST PALM BEACH FL
14552	MICROSEMI CROP	2830 S FAIRVIEW ST	SANTA ANA CA 92704-5948
14752	ELECTRO CUBE INC	1710 S DEL MAR AVE	SAN GABRIEL CA 91776-3825
15238	ITT SEMICONDUCTORS A DIVISION OF INTERNATIONAL TELEPHONE AND TELEGRAPH CORP	500 BROADWAY P O BOX 168	LAWRENCE MA 01841-3002
18324	SIGNETICS CORP	4130 S MARKET COURT	SACRAMENTO CA 95834-1222
19396	MILITARY PRODUCTS DIV ILLINOIS TOOL WORKS INC PAKTRON DIVISION	1205 MCCONVILLE RD PO BOX 4539	LYNCHBURG VA 24502-4535

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
19701	MEPCO/CENTRALAB	P O BOX 760	MINERAL WELLS TX 76067-0760
22526	A NORTH AMERICAN PHILIPS CO DU PONT E I DE NEMOURS AND CO INC DU PONT CONNECTOR SYSTEMS DIV MILITARY PRODUCTS GROUP	515 FISHING CREEK RD	NEW CUMBERLAND PA 17070-3007
22753	UID SWITCHES INC	6615 W IRVING PARK RD	CHICAGO IL 60634
22929	DIV OF ILLINOIS TOOL WORKS INC DALE ELECTRONICS CORP FREQUENCY CONTROL GROUP	1155 W 23RD ST	TEMPE AZ 85282-1822
23936	PAPST MECHATRONIC CORP	2105 S BASCOM AVE SUITE 160	CAMPBELL CA 95008
24546	CORNING GLASS WORKS	550 HIGH ST	BRADFORD PA 16701-3737
27012	MICRO DEVICES CORP SUB OF EMERSON ELECTRIC CO	1320 S MAIN ST PO BOX 3538	MANSFIELD OH 44907-2516
27014	NATIONAL SEMICONDUCTOR CORP	2900 SEMICONDUCTOR DR	SANTA CLARA CA 95051-0606
27264	MOLEX INC	2222 WELLINGTON COURT	LISLE IL 60532-1613
31433	UNION CARBIDE CORP ELECTRONICS DIV	HWY 276 SE PO BOX 5928	GREENVILLE SC 29606
31918	ITT SCHADOW INC	8081 WALLACE RD	EDEN PRAIRIE MN 55344-2224
32159	WEST-CAP ARIZONA	2201 E ELVIRA ROAD	TUCSON AZ 85706-7026
32997	BOURNS INC TRIMPOT DIV	1200 COLUMBIA AVE	RIVERSIDE CA 92507-2114
33096	COLORADO CRYSTAL CORP	2303 W 8TH ST	LOVELAND CO 80537-5268
33297	NEC ELECTRONICS USA INC ELECTRONICS ARRAYS DIV	550 E MIDDLEFIELD RD	MOUNTAIN VIEW CA 94043-4408
34335	A M D ADVANCED MICRO DEVICES	901 THOMPSON PL	SUNNYVALE CA 94086-4518
34649	INTEL CORP	3065 BOWERS AVE	SANTA CLARA CA 95051
50088	SGS-THOMSON MICROELECTRONICS INC	1310 ELECTRONICS DR	CARROLLTON TX 75006-6905
50434	HEWLETT-PACKARD CO OPTOELECTRONICS DIV	370 W TRIMBLE RD	SAN JOSE CA 95131
51642	CENTRE ENGINEERING INC	2820 E COLLEGE AVE	STATE COLLEGE PA 16801-7515
53628	AMERICAN PLASTICRAFT CO	814 N SACRAMENTO BLVD	CHICAGO IL 60622-4326
54422	NORTHWEST TECHNOLOGY INC DBA SCHNEEMAN ELECTRONICS	1600 NW WASHINGTON BLVD PO BOX 946	GRANDS PASS OR 97526-1052
54473	MATSUSHITA ELECTRIC CORP OF AMERICA	ONE PANASONIC WAY PO BOX 1501	SECAUCUS NJ 07094-2917
55680	NICHICON /AMERICA/ CORP	927 E STATE PKY	SCHAUMBURG IL 60195-4526
56289	SPRAGUE ELECTRIC CO WORLD HEADQUARTERS	92 HAYDEN AVE	LEXINGTON MA 02173-7929
56866	QUALITY THERMISTOR INC	2096 SOUTH COLE RD SUITE 7	BOISE ID 83705
57668	R-OHM CORP	16931 MILLIKEN AVE	IRVINE CA 92713
57924	BOURNS INC NETWORKS DIV	1200 COLUMBIA AVE	RIVERSIDE CA 92507-2114
58361	GENERAL INSTRUMENT CORP OPTOELECTRONICS DIV	3400 HILLVIEW AVE	PALO ALTO CA 94304-1319
59660	TUSONIX INC	7741 N BUSINESS PARK DR PO BOX 37144	TUCSON AZ 85740-7144
60705	CERA-MITE CORPORATION	1327 6TH AVE	GRAFTON WI 53024-1831
62786	HITACHI AMERICA LTD	1800 BERING DRIVE	SAN JOSE CA 95122
71400	BUSSMANN DIV OF COOPER INDUSTRIES INC	114 OLD STATE RD PO BOX 14460	ST LOUIS MO 63178
72982	ERIE SPECIALTY PRODUCTS INC	645 W 11TH ST	ERIE PA 16512
75042	TRW INC TRW ELECTRONIC COMPONENTS IRC FIXED RESISTORS PHILADELPHIA DIV	401 N BROAD ST	PHILADELPHIA PA 19108-1001
75378	CTS KNIGHTS INC	400 REIMANN AVE	SANDWICH IL 60548-1846
75915	LITTELFUSE TRACTOR INC SUB TRACTOR INC	800 E NORTHWEST HWY	DES PLAINES IL 60016-3049
76493	BELL INDUSTRIES INC JW MILLER DIV	19070 REYES AVE PO BOX 5825	COMPTON CA 90224-5825
80009	TEKTRONIX INC	14150 SW KARL BRAUN DR PO BOX 500 MS 53-111	BEAVERTON OR 97707-0001
81483	INTERNATIONAL RECTIFIER	9220 SUNSET BLVD P O BOX 2321 TERMINAL ANNEX	LOS ANGELES CA 90069-3501

CROSS INDEX - MFR. CODE NUMBER TO MANUFACTURER

Mfr. Code	Manufacturer	Address	City, State, Zip Code
82389	SWITCHCRAFT INC SUB OF RAYTHEON CO	5555 N ELSTRON AVE	CHICAGO IL 60630-1314
87473	INSULECTRO A DIV OF QUINTEC INDUSTRIES	3176 AIRWAY AVE	COSTA MESA CA 92626-4608
91637	DALE ELECTRONICS INC	2064 12TH AVE PO BOX 609	COLUMBUS NE 68601-3632
TK0213	TOPTRON CORP		TOKYO JAPAN
TK0510	PANASONIC COMPANY DIV OF MATSUSHITA ELECTRIC CORP	ONE PANASONIC WAY	SECAUCUS NJ 07094
TK0515	WORLD PRODUCTS INC	19678 8TH ST E PO BOX 517	SONOMA CA 95476-3803
TK1015	MUSASHI WORKS OF HITACHI LTD	1450 JOSUIHON-CHO KODAIRA-SHI	TOKYO JAPAN
TK1345	ZMAN AND ASSOCIATES	7633 S 180TH	KENT WA 98032
TK1375	ESAM	PO BOX 376	GRANTS PASS OR 97526
TK1385	SANKEN ELECTRIC USA, INC	3848 CARSON ST ROOM 1005	TORRANCE, CA 90503
TK1386	PYRAMID/INTERFACE	8623 S 212TH ST	KENT WA 98031-1910
TK1451	FLOYD BELL ASSOC	897 HIGGS AVE	COLUMBUS OH 43213
TK1456	PAPST MECHATRONIC CORP	AQUIDNECK INDUSTRIAL PK	NEWPORT RI 02840
TK1483	TEKA PRODUCTS INC	45 SALEM ST	PROVIDENCE RI 02907
TK1549	VOLTA INC	2118 ZANKER RD	SAN JOSE CA 95131

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A01	-----			CKT BOARD ASSY:PT-1 (PART OF 672-1130-00)		
A02	-----			CKT BOARD ASSY:PT-2 (PART OF 672-1130-00)		
A03	-----			CKT BOARD ASSY:LED-1 (PART OF 672-1130-00)		
A04	-----			CKT BOARD ASSY:LED-2 (PART OF 672-1130-00)		
A05	670-7529-00			CIRCUIT BD ASSY:KEYBOARD	80009	670-7529-00
A06	670-7535-00	B010100	B041164	CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-00
A06	670-7535-01	B041165	B090099	CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-01
A06	670-7535-02	B090100	B091306	CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-02
A06	670-7535-03	B091307	B091539	CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-03
A06	670-7535-04	B091540		CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-04
A07	670-7534-01	B010100	B029999	CIRCUIT BD ASSY:PWR SPLY	80009	670-7534-01
A07	670-7534-02	B030000	B040599	CIRCUIT BD ASSY:PWR SPLY	80009	670-7534-02
A07	670-7534-03	B040600	B059999	CIRCUIT BD ASSY:PWR SPLY	80009	670-7534-03
A07	670-7534-04	B060000	B069999	CIRCUIT BD ASSY:PWR SPLY	80009	670-7534-04
A07	670-7534-05	B070000	B079999	CIRCUIT BD ASSY:PWR SPLY	80009	670-7534-05
A07	670-7534-06	B080000	B090299	CIRCUIT BD ASSY:PWR SPLY	80009	670-7534-06
A07	670-7534-07	B090300	B091209	CIRCUIT BD ASSY:PWR SPLY	80009	670-7534-07
A07	670-7534-08	B091210		CIRCUIT BD ASSY:POWER SUPPLY	80009	670-7534-08
A08	670-7528-01	B010100	B030300	CIRCUIT BD ASSY:INTFC	80009	670-7528-01
A08	670-7528-02	B030301	B040744	CIRCUIT BD ASSY:INTFC	80009	670-7528-02
A08	670-7528-03	B040745	B069999	CIRCUIT BD ASSY:INTFC	80009	670-7528-03
A08	670-7528-04	B070000	B079999	CIRCUIT BD ASSY:INTERFACE	80009	670-7528-04
A08	670-7528-05	B080000	B080558	CIRCUIT BD ASSY:INTERFACE	80009	670-7528-05
A08	670-7528-06	B080559	B091330	CIRCUIT BD ASSY:INTERFACE	80009	670-7528-06
A08	670-7528-07	B091331		CIRCUIT BD ASSY:INTERFACE	80009	670-7528-07
A09	670-7527-01	B010100	B049999	CIRCUIT BD ASSY:CONTROL PROCESSOR	80009	670-7527-01
A09	670-7527-02	B050000	B079999	CIRCUIT BD ASSY:CONTROL PROCESSOR	80009	670-7527-02
A09	670-7527-03	B080000	B089999	CIRCUIT BD ASSY:CONTROL PROCESSOR	80009	670-7527-03
A09	670-7527-04	B090000		CIRCUIT BD ASSY:CONTROL PROCESSOR	80009	670-7527-04
A10	670-7526-00	B010100	B029999	CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-00
A10	670-7526-01	B030000	B030488	CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-01
A10	670-7526-02	B030489	B079999	CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-02
A10	670-7526-03	B080000	B091259	CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-03
A10	670-7526-05	B091260		CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-05
A11	670-7525-00	B010100	B030300	CIRCUIT BD ASSY:DISPLAY	80009	670-7525-00
A11	670-7525-01	B030301	B040329	CIRCUIT BD ASSY:DISPLAY	80009	670-7525-01
A11	670-7525-02	B040350	B040494	CIRCUIT BD ASSY:DISPLAY	80009	670-7525-02
A11	670-7525-03	B040495	B090244	CIRCUIT BD ASSY:DISPLAY	80009	670-7525-03
A11	670-7525-04	B090245		CIRCUIT BD ASSY:DISPLAY	80009	670-7525-04
A14	670-7523-01	B010100	B030250	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-01
A14	670-7523-02	B030251	B040349	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-02
A14	670-7523-03	B040350	B040403	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-03
A14	670-7523-04	B040404	B040494	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-04
A14	670-7523-05	B040495	B040599	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-05
A14	670-7523-06	B040600	B040778	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-06
A14	670-7523-07	B040779	B049999	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-07
A14	670-7523-08	B050000	B079999	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-08
A14	670-7523-09	B080000	B091048	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-09
A14	670-7523-10	B091049	B091799	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-10
A14	670-7523-11	B091800		CIRCUIT BD ASSY:TRIGGER	80009	670-7523-11
A15	670-7524-01	B010100	B029999	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-01
A15	670-7524-02	B030000	B030494	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-02
A15	670-7524-03	B030495	B039999	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-03
A15	670-7524-04	B040000	B040497	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-04

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A15	670-7524-05	B040498	B040742	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-05
A15	670-7524-06	B040743	B042339	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-06
A15	670-7524-07	B042340	B042612	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-07
A15	670-7524-08	B042613	B044104	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-08
A15	670-7524-09	B044105		CIRCUIT BD ASSY:9 CHAN ACQ (D1 ONLY)	80009	670-7524-09
A16	670-7703-01	B010100	B029999	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-01
A16	670-7703-02	B030000	B030451	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-02
A16	670-7703-03	B030452	B039999	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-03
A16	670-7703-04	B040000	B043399	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-04
A16	670-7703-05	B043400	B044131	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-05
A16	670-7703-06	B044132	B045947	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-06
A16	670-7703-07	B045948		CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-07
A21	670-7539-02			CIRCUIT BD ASSY:MAIN EXTENDER (067-1103-02 ONLY.OPT.ACCESSORY)	80009	670-7539-02
A22	670-8567-00			CIRCUIT BD ASSY:ACQUISITION EXTENDER (067-1103-02 ONLY.OPT.ACCESSORY)	80009	670-8567-00
A31	670-7696-00	B010100	B019999	CIRCUIT BD ASSY:RS232C (1200C01 ONLY.OPT.ACCESSORY)	80009	670-7696-00
A31	670-7696-01	B020000		CIRCUIT BD ASSY:RS232C (1200C01 ONLY.OPT.ACCESSORY)	80009	670-7696-01
A32	670-7697-01			CIRCUIT BD ASSY:GP1B (1200C02 ONLY.OPT.ACCESSORY)	80009	670-7697-01
A41	670-7620-00			CIRCUIT BD ASSY:RAM PACK (12RS01 ONLY.OPT.ACCESSORY)	80009	670-7620-00
A42	670-7538-00			CIRCUIT BD ASSY:32K ROM PACK (067-1103-02,12RD01,12RS11 12RS12 ONLY.OPT.ACCESSORY)	80009	670-7538-00
A01	-----			CKT BOARD ASSY:PT-1 (PART OF 672-1130-00)		
A01Q110	151-0252-01			SEMICON DVC,PH:NPN,SI,100MW,TO-18	07263	FPT 100B
A01Q130	151-0252-01			SEMICON DVC,PH:NPN,SI,100MW,TO-18	07263	FPT 100B
A01Q150	151-0252-01			SEMICON DVC,PH:NPN,SI,100MW,TO-18	07263	FPT 100B
A01Q170	151-0252-01			SEMICON DVC,PH:NPN,SI,100MW,TO-18	07263	FPT 100B
A01Q190	151-0252-01			SEMICON DVC,PH:NPN,SI,100MW,TO-18	07263	FPT 100B
A01R110	317-0105-00			RES,FXD,CMPSN:1M OHM,5%,0.125W	01121	BB1055
A01R130	317-0105-00			RES,FXD,CMPSN:1M OHM,5%,0.125W	01121	BB1055
A01R150	317-0105-00			RES,FXD,CMPSN:1M OHM,5%,0.125W	01121	BB1055
A01R170	317-0105-00			RES,FXD,CMPSN:1M OHM,5%,0.125W	01121	BB1055
A01R190	317-0105-00			RES,FXD,CMPSN:1M OHM,5%,0.125W	01121	BB1055
A02	-----			CKT BOARD ASSY:PT-2 (PART OF 672-1130-00)		
A02Q110	151-0252-01			SEMICON DVC,PH:NPN,SI,100MW,TO-18	07263	FPT 100B
A02Q170	151-0252-01			SEMICON DVC,PH:NPN,SI,100MW,TO-18	07263	FPT 100B
A02R110	317-0105-00			RES,FXD,CMPSN:1M OHM,5%,0.125W	01121	BB1055
A02R170	317-0105-00			RES,FXD,CMPSN:1M OHM,5%,0.125W	01121	BB1055
A03	-----			CKT BOARD ASSY:LED-1 (PART OF 672-1130-00)		
A03DS110	152-0621-00			SEMICON DVC,DI:LED,GAAS,1.5MW,IF=100MA	03508	LED56

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A03DS130	152-0621-00		SEMICON DVC,DI:LED,GAAS,1.5MW,IF=100MA	03508	LED56
A03DS150	152-0621-00		SEMICON DVC,DI:LED,GAAS,1.5MW,IF=100MA	03508	LED56
A03DS170	152-0621-00		SEMICON DVC,DI:LED,GAAS,1.5MW,IF=100MA	03508	LED56
A03DS190	152-0621-00		SEMICON DVC,DI:LED,GAAS,1.5MW,IF=100MA	03508	LED56
A04	-----		CKT BOARD ASSY:LED-2 (PART OF 672-1130-00)		
A04DS110	152-0621-00		SEMICON DVC,DI:LED,GAAS,1.5MW,IF=100MA	03508	LED56
A04DS170	152-0621-00		SEMICON DVC,DI:LED,GAAS,1.5MW,IF=100MA	03508	LED56
A05	670-7529-00		CIRCUIT BD ASSY:KEYBOARD	80009	670-7529-00
A05C109	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C114	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C118	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C119	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C121	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C122	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C127	290-0943-00		CAP,FXD,ELCLTLT:47UF,+50-20%,25V	55680	ULB1E470TAAANA
A05C128	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C133	290-0943-00		CAP,FXD,ELCLTLT:47UF,+50-20%,25V	55680	ULB1E470TAAANA
A05C203	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C213	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C248	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C344	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05C539	281-0813-00		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A05DS204	150-1043-00		LT EMITTING DIO:ORANGE,635NM,35MA MAX	58361	MV5774C
A05DS303	150-1043-00		LT EMITTING DIO:ORANGE,635NM,35MA MAX	58361	MV5774C
A05DS401	150-1043-00		LT EMITTING DIO:ORANGE,635NM,35MA MAX	58361	MV5774C
A05DS404	150-1043-00		LT EMITTING DIO:ORANGE,635NM,35MA MAX	58361	MV5774C
A05DS503	150-1043-00		LT EMITTING DIO:ORANGE,635NM,35MA MAX	58361	MV5774C
A05LR129	108-0520-00		COIL,RF:FIXED,2.2UH	80009	108-0520-00
A05LR134	108-0520-00		COIL,RF:FIXED,2.2UH	80009	108-0520-00
A05R105	301-0561-00		RES,FXD,FILM:560 OHM,5%,0.5W	01121	EB5615
A05R106	301-0561-00		RES,FXD,FILM:560 OHM,5%,0.5W	01121	EB5615
A05R115	301-0561-00		RES,FXD,FILM:560 OHM,5%,0.5W	01121	EB5615
A05R116	301-0561-00		RES,FXD,FILM:560 OHM,5%,0.5W	01121	EB5615
A05R117	301-0561-00		RES,FXD,FILM:560 OHM,5%,0.5W	01121	EB5615
A05R120	301-0561-00		RES,FXD,FILM:560 OHM,5%,0.5W	01121	EB5615
A05R200	307-0696-00		RES NTKW,FXD,FI:7,10K OHM,2%,0.15W EACH	01121	108A103
A05R215	303-0150-00		RES,FXD,CMPSN:15 OHM,5%,1W	01121	GB1505
A05R302	307-0790-00		RES NTKW,FXD,FI:5,220 OHM 2%,0.15W	11236	750-61-R220
A05R331	307-0650-00		RES NTKW,FXD,FI:9,2.7K OHM,5%,0.150W	11236	750-101-R2.7K
A05R348	307-0540-00		RES NTKW,FXD,FI:(5)1K OHM,10%,0.7W	11236	750-61-R1KOHM
A05R527	307-0540-00		RES NTKW,FXD,FI:(5)1K OHM,10%,0.7W	11236	750-61-R1KOHM
A05S108	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S118	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S124	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S214	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S219	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S229	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S300	263-0019-39		SWITCH PB ASSY:MOMENTARY	80009	263-0019-39
A05S304	263-0019-39		SWITCH PB ASSY:MOMENTARY	80009	263-0019-39
A05S313	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S318	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S328	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S332	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S342	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S402	263-0019-39		SWITCH PB ASSY:MOMENTARY	80009	263-0019-39
A05S410	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S414	263-0019-09		SWITCH PB ASSY:MOMENTARY	80009	263-0019-09

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A05S415	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S419	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S425	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S429	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S433	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S435	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S438	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S444	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S500	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S504	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S511	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S514	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S516	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S519	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S526	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S528	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05S536	263-0019-09			SWITCH PB ASSY:MOMENTARY	80009	263-0019-09
A05U135	156-0140-02			MICROCKT,DGTL:HEX BUFFERS W/OC HV OUT,	18324	N7417(NB OR FB)
A05U205	156-0513-02			MICROCKT,DGTL:CMOS,ANALOG MUX/DEMUX	02735	CD4051BFX
A05U239	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A05U338	156-0738-04			MICROCKT,DGTL:HEX D FF W/CLEAR,BURN-IN	01295	SN74S174 (JP4)
A05U525	156-1245-00			MICROCKT,LINER:7 XSTR,NPN,SI,HV/HIGH CURR	01295	ULN2003AN-P3
A05U529	156-0756-01			MICROCKT,DGTL:BCD DECIMAL DECODER,SCRN	02735	CD4028BFX
A06	670-7535-00	B010100	B041164	CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-00
A06	670-7535-01	B041165	B090099	CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-01
A06	670-7535-02	B090100	B091306	CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-02
A06	670-7535-03	B091307	B091539	CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-03
A06	670-7535-04	B091540		CIRCUIT BD ASSY:CRT DRIVE	80009	670-7535-04
A06C200	281-0767-00	B010100	B090099	CAP,FXD,CER DI:330PF,20%,100V	04222	MA106C331MAA
A06C200	283-0077-00	B090100		CAP,FXD,CER DI:330PF,5%,500V	59660	831-500B331J
A06C201	285-0808-00			CAP,FXD,PLASTIC:0.1UF,10%,50V	04099	EK13-16
A06C202	285-0808-00			CAP,FXD,PLASTIC:0.1UF,10%,50V	04099	EK13-16
A06C212	285-0808-00	B010100	B091306	CAP,FXD,PLASTIC:0.1UF,10%,50V	04099	EK13-16
A06C212	285-1076-00	B091307		CAP,FXD,PLASTIC:0.2UF,5%,100V	14752	230B1B204J
A06C260	283-0177-00	B041165		CAP,FXD,CER DI:1UF,+80-20%,25V	04222	SR302E105ZAATR
A06C301	290-0804-00			CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A06C306	281-0819-00			CAP,FXD,CER DI:33 PF,5%,50V	04222	GC105A330J
A06C308	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A06C312	290-0844-00			CAP,FXD,ELCTLT:100UF,+75-20%,35WVDC	54473	ECE-A35V100L
A06C322	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A06C324	290-0919-00			CAP,FXD,ELCTLT:470UF,+50-20%,35V	55680	UVX1V471MPA
A06C325	283-0129-00			CAP,FXD,CER DI:0.56UF,20%,100V	04222	SR501C564MAA
A06C328	290-0947-00			CAP,FXD,ELCTLT:33UF,+50-10%,160V W/SLEEVE	55680	UHC2C330TFA
A06C329	283-0013-00	B090100	B091247	CAP,FXD,CER DI:0.01UF,-0+100%,1000V	59660	818-602ZSU0103P
A06C329	283-0105-00	B091248		CAP,FXD,CER DI:0.01UF,+80-20%,2000V	60705	564CBA202IP203ZA
A06C330	283-0343-00	B010100	B090099	CAP,FXD,CER DI:0.01UF,20%,2000V	72982	3848545ZSU0103M
A06C330	283-0013-00	B090100	B091247	CAP,FXD,CER DI:0.01UF,-0+100%,1000V	59660	818-602ZSU0103P
A06C330	283-0105-00	B091248		CAP,FXD,CER DI:0.01UF,+80-20%,2000V	60705	564CBA202IP203ZA
A06C332	283-0343-00	B010100	B090099	CAP,FXD,CER DI:0.01UF,20%,2000V	72982	3848545ZSU0103M
A06C332	283-0013-00	B090100	B091247	CAP,FXD,CER DI:0.01UF,-0+100%,1000V	59660	818-602ZSU0103P
A06C332	283-0105-00	B091248		CAP,FXD,CER DI:0.01UF,+80-20%,2000V	60705	564CBA202IP203ZA
A06C335	283-0343-00	B010100	B090099	CAP,FXD,CER DI:0.01UF,20%,2000V	72982	3848545ZSU0103M
A06C335	283-0013-00	B090100	B091247	CAP,FXD,CER DI:0.01UF,-0+100%,1000V	59660	818-602ZSU0103P
A06C335	283-0105-00	B091248		CAP,FXD,CER DI:0.01UF,+80-20%,2000V	60705	564CBA202IP203ZA
A06C345	285-1262-00	B010100	B041164	CAP,FXD,PLASTIC:0.015UF,5%,400VDC	13606	715P15354JA3
A06C345	285-1090-00	B041165		CAP,FXD,PLASTIC:0.01UF,5%,1600V	14752	C2838
A06C350	285-1262-00			CAP,FXD,PLASTIC:0.015UF,5%,400VDC	13606	715P15354JA3
A06C364	290-0963-00			CAP,FXD,ELCTLT:220UF,+50-20%,25WVDC	54473	ECEA1EV221S
A06C365	290-0963-00			CAP,FXD,ELCTLT:220UF,+50-20%,25WVDC	54473	ECEA1EV221S

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A06C372	290-0782-00			CAP,FXD,ELCTLT:4.7UF,+75-10%,35VDC	55680	ULB1V4R7TAAANA
A06C373	290-0782-00			CAP,FXD,ELCTLT:4.7UF,+75-10%,35VDC	55680	ULB1V4R7TAAANA
A06C374	290-0782-00			CAP,FXD,ELCTLT:4.7UF,+75-10%,35VDC	55680	ULB1V4R7TAAANA
A06C375	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A06C401	290-0751-00			CAP,FXD,ELCTLT:2200UF,+50%-10%,16V	56289	D76245
A06C413	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A06C424	290-0985-00			CAP,FXD,ELCTLT:10UF,20%,25V	55680	UHA1E100KFAASE
A06C441	281-0783-00			CAP,FXD,CER DI:0.1 UF 20%,100V	04222	MA401C104MAA
A06C450	283-0198-00	B010100	B090099	CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A06C450	283-0339-00	B090100		CAP,FXD,CER DI:0.22UF,10%,50V	05397	C330C224K5R5CA
A06C452	290-0746-00			CAP,FXD,ELCTLT:47UF,+50-10%,16V	54473	ECE-A6V47L
A06C462	281-0813-00			CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A06C471	281-0785-00			CAP,FXD,CER DI:68PF,10%,100V	04222	MA101A680KAA
A06C477	281-0813-00			CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A06C478	281-0813-00			CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A06C481	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A06C482	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A06C512	290-0746-00			CAP,FXD,ELCTLT:47UF,+50-10%,16V	54473	ECE-A6V47L
A06C513	290-0746-00			CAP,FXD,ELCTLT:47UF,+50-10%,16V	54473	ECE-A6V47L
A06C521	290-0183-00			CAP,FXD,ELCTLT:1UF,10%,35V	05397	T322B105K035AS
A06C522	285-0685-00			CAP,FXD,PLASTIC:0.0068UF,10%,100V	56289	192P68292
A06C523	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A06C534	281-0772-00			CAP,FXD,CER DI:4700PF,10%,100V	04222	MA201C472KAA
A06C541	283-0057-00			CAP,FXD,CER DI:0.1UF,+80-20%,200V	04222	SR306E104ZAA
A06C542	283-0057-00			CAP,FXD,CER DI:0.1UF,+80-20%,200V	04222	SR306E104ZAA
A06C562	281-0813-00			CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A06CR321	152-0040-00	B090100		SEMICON DVC,DI:RECT,SI,600V,1A,DO-41	80009	152-0040-00
A06CR342	152-0674-00			SEMICON DVC,DI:RECT,SI,800V,1.0A,DO-41	13409	1N4947
A06CR345	152-0353-00			SEMICON DVC,DI:RECT,SI,800V,1W	05828	GP10K-014
A06CR360	152-0789-00			SEMICON DVC,DI:RECT,SI,1000V,3.0A,A399A	04713	SR3681K
A06CR372	152-0323-00			SEMICON DVC,DI:SW,SI,35V,0.1A,DO-7	14433	WG1518
A06CR444	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A06CR452	152-0789-00			SEMICON DVC,DI:RECT,SI,1000V,3.0A,A399A	04713	SR3681K
A06CR462	152-0107-00			SEMICON DVC,DI:RECT,SI,400 V,400MA,A1	12969	"G727"
A06CR466	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A06CR472	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A06CR561	152-0322-00			SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A06CR562	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A06CR570	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A06CR571	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A06J121	131-0608-00	B090100		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06J230	131-2527-00	B090100		TERM SET,PIN:HEADER,1 X 7,0.156 CTR	27264	09-61-1076
A06J381	131-1262-00	B090100		CONN,RCPT,ELEC:EDGE CARD,20/40 CONT,0.1 SP	05574	000201-4338
A06J414	131-2575-00	B090100		TERM SET,PIN:4 CONTACT,MALE	27264	09-60-1041
A06J581	131-0608-00	B090100		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06J582	131-1003-00	B090100		CONN,RCPT,ELEC:CKT BD MT,3 PRONG	80009	131-1003-00
A06J583	131-1003-00	B090100		CONN,RCPT,ELEC:CKT BD MT,3 PRONG	80009	131-1003-00
A06J584	131-1003-00	B090100		CONN,RCPT,ELEC:CKT BD MT,3 PRONG	80009	131-1003-00
A06L131	108-0245-00			CHOKE,RF:FIXED,3.9UH	76493	B6310-1
A06L374	108-0245-00			CHOKE,RF:FIXED,3.9UH	76493	B6310-1
A06L435	108-1165-00			COIL,LINERITY:	02113	E3294-A
A06Q106	151-0645-00			TRANSISTOR:NPN,SI,625MW,TO-92	03508	MPSA06
A06Q108	151-0645-00	B090100		TRANSISTOR:NPN,SI,625MW,TO-92	03508	MPSA06
A06Q265	151-0497-00	B010100	B041164	TRANSISTOR:NPN,SI,TO-220	80009	151-0497-00
A06Q265	151-0671-00	B041165		TRANSISTOR:NPN,SI,TO-220	TK1385	25C1983
A06Q271	151-0127-00			TRANSISTOR:NPN,SI,TO-18	04713	SL6073A
A06Q371	151-0367-00			TRANSISTOR:NPN,SI,X-55	04713	SPS 8811
A06Q372	151-0367-00			TRANSISTOR:NPN,SI,X-55	04713	SPS 8811

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A06Q373	151-1090-00			TRANSISTOR:FET,DUAL,N CHANNEL,SI	80009	151-1090-00
A06Q445	151-0710-00			TRANSISTOR:NPN,SI,TO-92 PLUS	04713	MPSW01A
A06Q461	151-0220-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0220-00
A06Q462	151-0220-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0220-00
A06Q471	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A06Q472	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A06Q473	151-0254-00			TRANSISTOR:DARLINGTON,NPN,SI,625MW,TO-92	03508	X38L3118
A06Q560	151-0632-00			TRANSISTOR:NPN,SILICON,TO-220	04713	MJE13007
A06Q561	151-0127-00			TRANSISTOR:NPN,SI,TO-18	04713	SL6073A
A06Q562	151-0221-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0221-00
A06Q571	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A06R100	305-0242-00			RES,FXD,CMPSN:2.4K OHM,5%,2W	01121	HB2425
A06R102	315-0470-00			RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A06R104	315-0123-00			RES,FXD,FILM:12K OHM,5%,0.25W	57668	NTR25J-E12K0
A06R200	315-0181-00			RES,FXD,FILM:180 OHM,5%,0.25W	57668	NTR25J-E180E
A06R202	315-0390-00			RES,FXD,FILM:39 OHM,5%,0.25W	57668	NTR25J-E39E0
A06R203	315-0474-00			RES,FXD,FILM:470K OHM,5%,0.25W	19701	5043CX470KQJ92U
A06R212	301-0331-00			RES,FXD,FILM:330 OHM,5%,0.5W	19701	5053CX330R0J
A06R213	315-0124-00	B010100	8041164	RES,FXD,FILM:120K OHM,5%,0.25W	19701	5043CX120K0J
A06R213	315-0154-00	B041165		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A06R221	311-1235-00			RES,VAR,NONWW:100K OHM,0.5W	32997	3386F-T04-104
A06R235	315-0305-00	B010100	8090099	RES,FXD,FILM:3M OHM,5%,0.25W	01121	CB3055
A06R235	311-1225-00	B090100		RES,VAR,NONWW:TRMR,1K OHM,0.5W	32997	3386F-T04-102
A06R241	301-0102-00			RES,FXD,CMPSN:1K OHM,5%,0.50W	19701	5053CX1K000J
A06R260	315-0510-00	B010100	8041164	RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A06R260	315-0330-00	B041165		RES,FXD,FILM:33 OHM,5%,0.25W	19701	5043CX33R00J
A06R271	315-0241-00			RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A06R272	315-0151-00			RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A06R273	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A06R300	311-1235-00			RES,VAR,NONWW:100K OHM,0.5W	32997	3386F-T04-104
A06R301	315-0683-00			RES,FXD,FILM:68K OHM,5%,0.25W	57668	NTR25J-E68K0
A06R304	315-0473-00			RES,FXD,FILM:47K OHM,5%,0.25W	57668	NTR25J-E47K0
A06R305	315-0474-00			RES,FXD,FILM:470K OHM,5%,0.25W	19701	5043CX470KQJ92U
A06R306	315-0224-00			RES,FXD,FILM:220K OHM,5%,0.25W	57668	NTR25J-E220K
A06R307	315-0563-00			RES,FXD,FILM:56K OHM,5%,0.25W	19701	5043CX56K00J
A06R308	315-0563-00			RES,FXD,FILM:56K OHM,5%,0.25W	19701	5043CX56K00J
A06R320	311-1235-00	B010100	8091306	RES,VAR,NONWW:100K OHM,0.5W	32997	3386F-T04-104
A06R320	311-1232-00	B091307		RES,VAR,NONWW:TRMR,50K OHM,0.5W	32997	3386F-T04-503
A06R321	321-0412-00	B010100	8091306	RES,FXD,FILM:191K OHM,1%,0.125W,TC=T0	07716	CEAD19102F
A06R321	321-0389-00	B091307		RES,FXD,FILM:110K OHM,1%,0.125W,TC=T0	07716	CEAD11002F
A06R323	315-0304-00			RES,FXD,FILM:300K OHM,5%,0.25W	57668	NTR25J-E300K
A06R325	311-1254-00			RES,VAR,NONWW:TRMR,1M OHM,0.5W	32997	3386F-T04-105
A06R326	315-0201-00	B090100		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A06R328	315-0474-00	B090100		RES,FXD,FILM:470K OHM,5%,0.25W	19701	5043CX470KQJ92U
A06R329	315-0474-00	B090100		RES,FXD,FILM:470K OHM,5%,0.25W	19701	5043CX470KQJ92U
A06R331	315-0105-00	B010100	8090099	RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A06R331	315-0514-00	B090100		RES,FXD,FILM:510K OHM,5%,0.25W	19701	5043CX510K0J
A06R362	308-0710-00	B010100	8090099	RES,FXD,WW:0.27 OHM,5%,1W	75042	BW-20-R2700J
A06R371	321-0030-00			RES,FXD,FILM:20.0 OHM,1%,0.125W,TC=T0	57668	CRB14FXE 20 OHM
A06R372	311-0643-00			RES,VAR,NONWW:TRMR,50 OHM,0.5W	32997	3329H-L58-500
A06R375	315-0361-00			RES,FXD,FILM:360 OHM,5%,0.25W	19701	5043CX360R0J
A06R376	315-0431-00			RES,FXD,FILM:430 OHM,5%,0.25W	19701	5043CX430R0J
A06R411	308-0677-00			RES,FXD,WW:1 OHM,5%,2W	75042	ORDER BY DESC
A06R413	307-0023-00			RES,FXD,CMPSN:4.7 OHM,10%,0.5W	01121	EB47G1
A06R421	311-1225-00	B090100		RES,VAR,NONWW:TRMR,1K OHM,0.5W	32997	3386F-T04-102
A06R432	303-0331-00			RES,FXD,CMPSN:330 OHM,5%,1W	01121	GB3315
A06R442	303-0331-00	B010100	8090099	RES,FXD,CMPSN:330 OHM,5%,1W	01121	GB3315
A06R442	315-0101-00	B090100		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A06R443	315-0102-00		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01KO
A06R444	315-0511-00		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A06R446	307-0009-00		RES,FXD,CMPSN:4.7 OHM,10%,1W	01121	GB47G1
A06R455	308-0767-00		RES,FXD,Ww:1.1 OHM,5%,1W	75042	BW-20-1R100J
A06R462	315-0104-00		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A06R463	321-0108-00		RES,FXD,FILM:130 OHM 1%,0.125W,TC=TO	07716	CEAD13000F
A06R464	315-0100-00		RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A06R465	315-0241-00		RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A06R467	315-0161-00		RES,FXD,FILM:160 OHM,5%,0.25W	57668	NTR25J-E 160E
A06R471	321-0481-00		RES,FXD,FILM:1M OHM,1%,0.125W,TC=TO	19701	5043ED1M000F
A06R472	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A06R473	315-0105-00		RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A06R475	315-0750-00		RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A06R476	315-0181-00		RES,FXD,FILM:180 OHM,5%,0.25W	57668	NTR25J-E180E
A06R477	315-0430-00		RES,FXD,FILM:43 OHM,5%,0.25W	19701	5043CX43R00J
A06R478	315-0152-00		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A06R479	315-0331-00		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A06R481	321-0087-00		RES,FXD,FILM:78.7 OHM,1%,0.125W,TC=TO	91637	CMF55116678R70F
A06R500	301-0560-00		RES,FXD,FILM:56 OHM,5%,0.5W	19701	5053CX56R00J
A06R511	301-0560-00		RES,FXD,FILM:56 OHM,5%,0.5W	19701	5053CX56R00J
A06R513	311-1227-00		RES,VAR,NONWw:TRMR,5K OHM,0.5W	32997	3386F-T04-502
A06R522	315-0302-00		RES,FXD,FILM:3K OHM,5%,0.25W	57668	NTR25J-E03K0
A06R531	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A06R532	315-0123-00		RES,FXD,FILM:12K OHM,5%,0.25W	57668	NTR25J-E12K0
A06R533	315-0154-00		RES,FXD,FILM:150K OHM,5%,0.25W	57668	NTR25J-E150K
A06R534	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A06R540	315-0242-00		RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A06R541	315-0222-00	B010100	RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A06R541	315-0202-00	B041165	RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A06R543	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A06R555	311-1221-00		RES,VAR,NONWw:TRMR,50 OHM,0.5W	32997	3386F-T04-500
A06R561	315-0220-00		RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A06R562	321-0607-00		RES,FXD,FILM:80 OHM,1%,0.125W,TC=TO	57668	CRB14 FXE 80 OHM
A06R570	315-0222-00		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A06R571	321-0774-00		RES,FXD,FILM:4.5K OHM,1%,0.125 TC=TO	07716	CEAD45000F
A06R572	321-0176-00		RES,FXD,FILM:665 OHM,1%,0.125W,TC=TO	07716	CEAD665R0F
A06R573	315-0101-00		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A06R574	315-0103-00		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A06R575	315-0751-00		RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A06R576	321-0147-00		RES,FXD,FILM:332 OHM,1%,0.125W,TC=TO	07716	CEAD332R0F
A06R577	321-0108-00		RES,FXD,FILM:130 OHM 1%,0.125W,TC=TO	07716	CEAD13000F
A06R578	302-0470-00		RES,FXD,CMPSN:47 OHM,10%,0.5W	01121	EB 4701
A06T251	120-1490-00		XFMR,PWR,STU:FLYBACK	02289	2431962
A06T555	120-1476-00		XFMR,BASE DRIVE:	02113	701-560-016
A06TP111	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP181	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP210	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP301	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP331	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP342	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP414	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP445	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP452	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP521	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06TP542	131-0608-00	B090100	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A06U311	156-1693-00		MICROCKT,LINEAR:TV VERTICAL DEFLECTION SYS	56289	ULN2270Q
A06U534	156-1147-00		MICROCKT,LINEAR:TV HORIZ PROCESSOR	02735	CA1391E
A06VR260	152-0055-00	B010100	SEMICONV DVC,DI:ZEN,SI,11V,5%,0.4W,DO-7	14433	Z5407

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A06VR260	152-0662-00	B041165		SEMICON DVC,DI:ZEN,SI,5V,1%,400MW,DO-7	04713	SZG195RL
A06VR261	152-0760-00	B041165	B091247	SEMICON DVC,DI:ZEN,SI,6.2V,2%,400MW,DO-35	04713	SZG30205
A06VR261	152-0662-00	B091248		SEMICON DVC,DI:ZEN,SI,5V,1%,400MW,DO-7	04713	SZG195RL
A06VR435	152-0285-00	B010100	B041164	SEMICON DVC,DI:ZEN,SI,62V,5%,0.4W,DO-7	12954	1N980B
A06VR435	152-0286-00	B041165		SEMICON DVC,DI:ZEN,SI,75V,5%,0.4W,DO-7	14552	1N982B
A06W220	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A06W222	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A06W374	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A06W375	131-0566-00			BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A07	670-7534-01	B010100	B029999	CIRCUIT BD ASSY: PWR SPLY	80009	670-7534-01
A07	670-7534-02	B030000	B040599	CIRCUIT BD ASSY: PWR SPLY	80009	670-7534-02
A07	670-7534-03	B040600	B059999	CIRCUIT BD ASSY: PWR SPLY	80009	670-7534-03
A07	670-7534-04	B060000	B069999	CIRCUIT BD ASSY: PWR SPLY	80009	670-7534-04
A07	670-7534-05	B070000	B079999	CIRCUIT BD ASSY: PWR SPLY	80009	670-7534-05
A07	670-7534-06	B080000	B090299	CIRCUIT BD ASSY: PWR SPLY	80009	670-7534-06
A07	670-7534-07	B090300	B091209	CIRCUIT BD ASSY: PWR SPLY	80009	670-7534-07
A07	670-7534-08	B091210		CIRCUIT BD ASSY: POWER SUPPLY	80009	670-7534-08
A07C100	283-0417-00	B010100	B079999	CAP,FXD,CER DI:0.22UF,20%,400V	51642	500-400-Z5U-224M
A07C101	285-1302-00	B080000		CAP,FXD,PLASTIC:0.22UF,20%,250V	80009	285-1302-00
A07C121	290-1015-00			CAP,FXD,ELCTLT:1000UF,+100-10%,200V	00853	DCM102W200AA2PC
A07C122	283-0178-00			CAP,FXD,CER DI:0.1UF,20%,100V	05397	C330C104Z1U1CA
A07C131	290-1015-00			CAP,FXD,ELCTLT:1000UF,+100-10%,200V	00853	DCM102W200AA2PC
A07C161	290-0901-00			CAP,FXD,ELCTLT:800UF,+50-10%,50V	56289	674D807H050JJ5A
A07C165	290-0804-00	B080000		CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C171	290-0800-00			CAP,FXD,ELCTLT:250UF,+100-10%,20V	56289	672D257H020DM5C
A07C172	290-0932-00			CAP,FXD,ELCTLT:390UF,+100-10%,15VDC	56289	672D676
A07C173	290-0845-00			CAP,FXD,ELCTLT:330UF,+50-10%,25V	54473	ECE-A25V330L
A07C181	290-0944-00			CAP,FXD,ELCTLT:220UF,+50-20%,10V	55680	ULB1A221TPAANA
A07C182	290-0804-00	B010100	B079999	CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C183	290-0804-00	B010100	B079999	CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C187	290-0804-00	B080000		CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C188	290-0804-00	B080000	B091209	CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C188	290-0943-00	B091210		CAP,FXD,ELCTLT:47UF,+50-20%,25V	55680	ULB1E470TAAANA
A07C189	290-0804-00	B080000		CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C210	283-0417-00	B010100	B079999	CAP,FXD,CER DI:0.22UF,20%,400V	51642	500-400-Z5U-224M
A07C210	285-1302-00	B080000		CAP,FXD,PLASTIC:0.22UF,20%,250V	80009	285-1302-00
A07C211	285-1196-00			CAP,FXD,PPR DI:0.01UF,20%,250V	TK0515	PME 265 MB 510
A07C212	285-1196-00			CAP,FXD,PPR DI:0.01UF,20%,250V	TK0515	PME 265 MB 510
A07C221	283-0417-00	B010100	B079999	CAP,FXD,CER DI:0.22UF,20%,400V	51642	500-400-Z5U-224M
A07C231	283-0659-00	B010100	B029999	CAP,FXD,MICA DI:1160PF,2%,500V	00853	D195F1161G0
A07C231	283-0696-00	B030000	B079999	CAP,FXD,MICA DI:2300PF,1%,500V	00853	D195F232F0
A07C271	290-0804-00	B010100	B079999	CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C272	283-0178-00	B010100	B079999	CAP,FXD,CER DI:0.1UF,20%,100V	05397	C330C104Z1U1CA
A07C274	281-0865-00	B010100	B079999	CAP,FXD,CER DI:1000PF,5%,100V	04222	MA101A102JAA
A07C274	283-0204-00	B080000		CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A07C275	281-0813-00	B010100	B079999	CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A07C276	283-0203-00	B080000		CAP,FXD,CER DI:0.47UF,20%,50V	04222	SR305SC474MAA
A07C277	281-0775-00	B010100	B079999	CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A07C278	281-0775-00	B010100	B079999	CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A07C278	290-0804-00	B080000		CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C279	283-0198-00	B080000		CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224M5U1CA
A07C281	290-0804-00	B010100	B079999	CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C281	281-0775-00	B080000		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A07C282	290-0804-00	B010100	B079999	CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C282	281-0775-00	B080000		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A07C284	290-0804-00	B080000		CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C285	290-0804-00	B080000		CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C321	285-1203-00			CAP,FXD,PLASTIC:4UF,10%,200V	14752	C2551
A07C322	285-1203-00			CAP,FXD,PLASTIC:4UF,10%,200V	14752	C2551

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A07C325	283-0696-00	B080000		CAP,FXD,MICA DI:2300PF,1%,500V	00853	D195F232F0
A07C341	281-0812-00	B090300		CAP,FXD,CER DI:1000PF,10%,100V	04222	MA101C102KAA
A07C361	290-0844-00			CAP,FXD,ELCTLT:100UF,+75-20%,35WVDC	54473	ECE-A35V100L
A07C362	283-0198-00			CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224MSU1CA
A07C363	281-0775-00	B010100	B079999	CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A07C364	281-0865-00	B080000		CAP,FXD,CER DI:1000PF,5%,100V	04222	MA101A102JAA
A07C371	281-0812-00	B010100	B079999	CAP,FXD,CER DI:1000PF,10%,100V	04222	MA101C102KAA
A07C372	281-0773-00			CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A07C373	290-0804-00	B010100	B079999	CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C374	290-0891-00	B010100	B079999	CAP,FXD,ELCTLT:1UF,+75 -10%,50V	55680	ULA1H010TEA
A07C375	281-0812-00	B010100	B079999	CAP,FXD,CER DI:1000PF,10%,100V	04222	MA101C102KAA
A07C378	281-0865-00	B080000		CAP,FXD,CER DI:1000PF,5%,100V	04222	MA101A102JAA
A07C379	290-0891-00	B080000		CAP,FXD,ELCTLT:1UF,+75 -10%,50V	55680	ULA1H010TEA
A07C380	283-0198-00	B010100	B079999	CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224MSU1CA
A07C381	281-0775-00	B010100	B079999	CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A07C382	281-0773-00	B010100	B079999	CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A07C383	283-0198-00	B080000		CAP,FXD,CER DI:0.22UF,20%,50V	05397	C330C224MSU1CA
A07C384	290-0804-00	B080000		CAP,FXD,ELCTLT:10UF,+50-10%,25V	55680	ULB1E100TAAANA
A07C385	290-0845-00	B080000		CAP,FXD,ELCTLT:330UF,+50-10%,25V	54473	ECE-A25V330L
A07C386	281-0775-00	B080000		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A07C387	281-0773-00	B080000		CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A07C401	283-0417-00	B010100	B079999	CAP,FXD,CER DI:0.22UF,20%,400V	51642	500-400-Z5U-224M
A07C408	285-1302-00	B080000		CAP,FXD,PLASTIC:0.22UF,20%,250V	80009	285-1302-00
A07C410	285-1302-00	B080000		CAP,FXD,PLASTIC:0.22UF,20%,250V	80009	285-1302-00
A07C411	290-0944-00			CAP,FXD,ELCTLT:220UF,+50-20%,10V	55680	ULB1A221TPAANA
A07C427	290-0944-00	B080000		CAP,FXD,ELCTLT:220UF,+50-20%,10V	55680	ULB1A221TPAANA
A07C431	290-0944-00	B010100	B079999	CAP,FXD,ELCTLT:220UF,+50-20%,10V	55680	ULB1A221TPAANA
A07C445	281-0812-00	B090300		CAP,FXD,CER DI:1000PF,10%,100V	04222	MA101C102KAA
A07C451	290-0818-01			CAP,FXD,ELCTLT:390UF,+100-10%,40V	00853	301AER391U040B3
A07C460	290-0877-00			CAP,FXD,ELCTLT:1200UF,+100-10%,6.3V	56289	672D371
A07C465	290-0844-00	B080000		CAP,FXD,ELCTLT:100UF,+75-20%,35WVDC	54473	ECE-A35V100L
A07C471	290-0844-00	B010100	B079999	CAP,FXD,ELCTLT:100UF,+75-20%,35WVDC	54473	ECE-A35V100L
A07C472	290-0844-00	B010100	B091209	CAP,FXD,ELCTLT:100UF,+75-20%,35WVDC	54473	ECE-A35V100L
A07C472	290-0845-00	B091210		CAP,FXD,ELCTLT:330UF,+50-10%,25V	54473	ECE-A25V330L
A07C481	290-0944-00	B010100	B079999	CAP,FXD,ELCTLT:220UF,+50-20%,10V	55680	ULB1A221TPAANA
A07C487	290-0944-00	B080000		CAP,FXD,ELCTLT:220UF,+50-20%,10V	55680	ULB1A221TPAANA
A07CR151	152-0333-00			SEMICON DVC,DI:SW,SI,55V,200MA,DO-35	07263	FDH-6012
A07CR152	152-0333-00			SEMICON DVC,DI:SW,SI,55V,200MA,DO-35	07263	FDH-6012
A07CR153	152-0333-00			SEMICON DVC,DI:SW,SI,55V,200MA,DO-35	07263	FDH-6012
A07CR154	152-0333-00			SEMICON DVC,DI:SW,SI,55V,200MA,DO-35	07263	FDH-6012
A07CR211	152-0750-00			SEMICON DVC,DI:RECT BRDG,600V,3A,FAST RCVY	05828	RKBPC606-12
A07CR251	152-0398-00			SEMICON DVC,DI:RECT,SI,200V,1A	04713	SR3609RL
A07CR252	152-0398-00			SEMICON DVC,DI:RECT,SI,200V,1A	04713	SR3609RL
A07CR253	152-0655-00			SEMICON DVC,DI:RECT,SI,100V,3A	03508	A115AX39
A07CR254	152-0655-00			SEMICON DVC,DI:RECT,SI,100V,3A	03508	A115AX39
A07CR255	152-0398-00			SEMICON DVC,DI:RECT,SI,200V,1A	04713	SR3609RL
A07CR262	152-0141-02	B080000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR266	152-0141-02	B080000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR267	152-0141-02	B080000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR271	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR272	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR276	152-0141-02	B080000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR281	152-0141-02	B080000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR282	152-0333-00	B010100	B079999	SEMICON DVC,DI:SW,SI,55V,200MA,DO-35	07263	FDH-6012
A07CR282	152-0141-02	B080000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR283	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR285	152-0333-00	B080000		SEMICON DVC,DI:SW,SI,55V,200MA,DO-35	07263	FDH-6012
A07CR321	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A07CR322	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR323	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR324	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR341	152-0398-00			SEMICON DVC,DI:RECT,SI,200V,1A	04713	SR3609RL
A07CR342	152-0398-00			SEMICON DVC,DI:RECT,SI,200V,1A	04713	SR3609RL
A07CR372	152-0141-02	B080000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR381	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR382	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR411	152-0066-00			SEMICON DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A07CR412	152-0400-00	B080000		SEMICON DVC,DI:RECT,SI,400V,1A	04713	SR1977K
A07CR421	152-0655-00			SEMICON DVC,DI:RECT,SI,100V,3A	03508	A115AX39
A07CR422	152-0400-00	B010100	B079999	SEMICON DVC,DI:RECT,SI,400V,1A	04713	SR1977K
A07CR423	152-0400-00			SEMICON DVC,DI:RECT,SI,400V,1A	04713	SR1977K
A07CR424	152-0655-00			SEMICON DVC,DI:RECT,SI,100V,3A	03508	A115AX39
A07CR431	152-0066-00			SEMICON DVC,DI:RECT,SI,400V,1A,DO-41	05828	GP10G-020
A07CR441	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR442	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR443	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR444	152-0141-02	B010100	B079999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR445	152-0793-00			SEMICON DVC,DI:DUAL RECT,SI,40V,25A	81483	28CPQ040
A07CR451	152-0793-00			SEMICON DVC,DI:DUAL RECT,SI,40V,25A	81483	28CPQ040
A07CR461	152-0794-00			SEMICON DVC,DI:RECT,SI,10A,30V,TO-220	81483	95-4269
A07CR471	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR472	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07CR481	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A07DS121	150-0035-00			LAMP,GLOW:90V MAX,0.3MA,AID-T,WIRE LD	TK0213	JH005/3011JA
A07J100	131-2978-00	B010100	B069999	HDR SKT,FLEXSTR:	80009	131-2978-00
A07J100	131-1614-00	B070000	B079999	CONN,RCPT,ELEC:CKT BD,1 X 36,0.1 SPACING	08261	800-380-000
A07J100	131-0589-00	B080000		TERMINAL,PIN:0.46 L X 0.025 SQ PH BRZ	22526	48283-029
A07J110	131-2978-00	B010100	B069999	HDR SKT,FLEXSTR:	80009	131-2978-00
A07J110	131-1614-00	B070000	B079999	CONN,RCPT,ELEC:CKT BD,1 X 36,0.1 SPACING	08261	800-380-000
A07J110	131-0589-00	B080000		TERMINAL,PIN:0.46 L X 0.025 SQ PH BRZ	22526	48283-029
A07J120	131-2978-00	B010100	B069999	HDR SKT,FLEXSTR:	80009	131-2978-00
A07J120	131-1614-00	B070000	B079999	CONN,RCPT,ELEC:CKT BD,1 X 36,0.1 SPACING	08261	800-380-000
A07J120	131-0589-00	B080000		TERMINAL,PIN:0.46 L X 0.025 SQ PH BRZ	22526	48283-029
A07J130	131-2978-00	B010100	B069999	HDR SKT,FLEXSTR:	80009	131-2978-00
A07J130	131-1614-00	B070000	B079999	CONN,RCPT,ELEC:CKT BD,1 X 36,0.1 SPACING	08261	800-380-000
A07J130	131-0589-00	B080000		TERMINAL,PIN:0.46 L X 0.025 SQ PH BRZ	22526	48283-029
A07J145	131-0589-00	B080000		TERMINAL,PIN:0.46 L X 0.025 SQ PH BRZ	22526	48283-029
A07J181	131-0589-00	B080000		TERMINAL,PIN:0.46 L X 0.025 SQ PH BRZ	22526	48283-029
A07J301	131-2663-00	B080000		CONN,RCPT,ELEC:PWR,3 MALE,250VAC,6A	82389	EAC 303
A07J444	131-0589-00	B080000		TERMINAL,PIN:0.46 L X 0.025 SQ PH BRZ	22526	48283-029
A07L100	108-0708-00	B010100	B079999	COIL,RF:FIXED,75NH	80009	108-0708-00
A07L115	108-0708-00	B080000		COIL,RF:FIXED,75NH	80009	108-0708-00
A07L151	108-0911-00			COIL,RF:FIXED,65UH	80009	108-0911-00
A07L171	108-1146-00			COIL,RF:FXD,18UH	80009	108-1146-00
A07L221	108-0808-00	B010100	B079999	COIL,RF:FIXED,500UH	80009	108-0808-00
A07L232	108-0808-00	B080000		COIL,RF:FIXED,500UH	80009	108-0808-00
A07L351	108-0911-00			COIL,RF:FIXED,65UH	80009	108-0911-00
A07L362	108-0585-00			COIL,RF:FIXED,116UH	80009	108-0585-00
A07L363	108-0317-00	B010100	B079999	COIL,RF:FIXED,15 UH	32159	71501M+10PERCENT
A07L445	108-1147-00			COIL,RF:FXD,122UH	80009	108-1147-00
A07L451	108-0909-00			COIL,RF:FIXED,1.6MH	TK1345	108-0909-00
A07L461	108-1137-00			COIL,RF:FIXED,3.2MH	80009	108-1137-00
A07P444	131-0993-00	B080000		BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A07Q273	151-0192-00			TRANSISTOR:NPN,SI,TO-92	04713	SPS8801
A07Q281	151-0453-00	B010100	B079999	TRANSISTOR:PMP,SI,TO-92	27014	ORDER BY DESCR
A07Q283	151-0453-00	B080000		TRANSISTOR:PMP,SI,TO-92	27014	ORDER BY DESCR

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A07Q284	151-0432-00	B080000		TRANSISTOR:NPN,SI,625MW,TO-92	04713	SPS8512
A07Q341	151-0710-00	B080000		TRANSISTOR:NPN,SI,TO-92 PLUS	04713	MPSW01A
A07Q367	151-0710-00	B010100	B079999	TRANSISTOR:NPN,SI,TO-92 PLUS	04713	MPSW01A
A07Q368	151-0710-00	B010100	B079999	TRANSISTOR:NPN,SI,TO-92 PLUS	04713	MPSW01A
A07Q370	151-0622-00	B010100	B079999	TRANSISTOR:PNP,SI,40V,1A,TO-226AE/237	04713	SPS8956(MPSW51A)
A07Q371	151-0622-00	B010100	B079999	TRANSISTOR:PNP,SI,40V,1A,TO-226AE/237	04713	SPS8956(MPSW51A)
A07Q371	151-0503-00	B080000		SCR:SI,TO-92	04713	SCR5138
A07Q372	151-0503-00	B010100	B079999	SCR:SI,TO-92	04713	SCR5138
A07Q379	151-0190-00	B080000		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A07Q381	151-0432-00	B010100	B079999	TRANSISTOR:NPN,SI,625MW,TO-92	04713	SPS8512
A07Q382	151-0273-00	B010100	B079999	TRANSISTOR:SELECTED	03508	X16E3616
A07Q385	151-0710-00	B080000		TRANSISTOR:NPN,SI,TO-92 PLUS	04713	MPSW01A
A07Q387	151-0622-00	B080000		TRANSISTOR:PNP,SI,40V,1A,TO-226AE/237	04713	SPS8956(MPSW51A)
A07Q421	151-0679-00			TRANSISTOR:NPN,SI,TO-220	04713	MJE13009
A07Q422	151-0679-00			TRANSISTOR:NPN,SI,TO-220	04713	MJE13009
A07Q441	151-0622-00	B080000		TRANSISTOR:PNP,SI,40V,1A,TO-226AE/237	04713	SPS8956(MPSW51A)
A07Q445	151-0710-00	B080000		TRANSISTOR:NPN,SI,TO-92 PLUS	04713	MPSW01A
A07Q446	151-0622-00	B080000		TRANSISTOR:PNP,SI,40V,1A,TO-226AE/237	04713	SPS8956(MPSW51A)
A07Q461	151-0621-00			TRANSISTOR:NPN,SI,T-220	03508	X44H382
A07Q471	151-0464-00			TRANSISTOR:NPN,SI,TO-220	80009	151-0464-00
A07Q472	151-0301-00			TRANSISTOR:PNP,SI,TO-18	04713	ST898
A07Q481	151-0622-00	B010100	B079999	TRANSISTOR:PNP,SI,40V,1A,TO-226AE/237	04713	SPS8956(MPSW51A)
A07Q482	151-0496-00	B010100	B079999	TRANSISTOR:NPN,SI	80009	151-0496-00
A07Q485	151-0273-00	B080000		TRANSISTOR:SELECTED	03508	X16E3616
A07Q487	151-0496-00	B080000		TRANSISTOR:NPN,SI	80009	151-0496-00
A07R121	315-0106-00			RES,FXD,FILM:10M OHM,5%,0.25W	01121	CB1065
A07R172	315-0104-00	B010100	B079999	RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A07R172	315-0103-00	B080000		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A07R173	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A07R174	315-0224-00	B010100	B079999	RES,FXD,FILM:220K OHM,5%,0.25W	57668	NTR25J-E220K
A07R174	315-0223-00	B080000		RES,FXD,FILM:22K OHM,5%,0.25W	19701	5043CX22K00J92U
A07R175	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A07R181	315-0242-00	B010100	B079999	RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A07R182	315-0100-00			RES,FXD,FILM:10 OHM,5%,0.25W	19701	5043CX10RR00J
A07R184	315-0103-00	B080000		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A07R186	315-0242-00	B080000		RES,FXD,FILM:2.4K OHM,5%,0.25W	57668	NTR25J-E02K4
A07R221	302-0224-00			RES,FXD,CMPSN:220K OHM,10%,0.5W MI	01121	EB 2241
A07R222	302-0224-00			RES,FXD,CMPSN:220K OHM,10%,0.5W MI	01121	EB 2241
A07R231	315-0103-00	B010100	B079999	RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A07R234	315-0103-00	B080000		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A07R245	308-0161-00			RES,FXD,Ww:3 OHM,5%,8W	91637	HL-12-02Z-8
A07R246	308-0240-00	B060000	B079999	RES,FXD,Ww:2 OHM,5%,3W	05347	MS3-2R00J
A07R261	315-0102-00	B080000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R263	315-0102-00	B080000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R264	321-0193-00	B080000		RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A07R265	321-0193-00	B080000		RES,FXD,FILM:1K OHM,1%,0.125W,TC=TO	19701	5033ED1K00F
A07R271	315-0101-00	B080000		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A07R272	315-0101-00	B010100	B079999	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A07R273	315-0750-00	B010100	B079999	RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E75E0
A07R273	315-0562-00	B080000		RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A07R274	321-0344-00	B010100	B079999	RES,FXD,FILM:37.4K OHM,1%,0.125W,TC=TO	19701	5033ED 37K40F
A07R274	315-0103-00	B080000		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A07R275	315-0103-00	B080000		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A07R276	321-0355-00	B080000		RES,FXD,FILM:48.7K OHM,1%,0.125W,TC=TO	07716	CEAD48701F
A07R277	315-0203-00	B080000		RES,FXD,FILM:20K OHM,5%,0.25W	57668	NTR25J-E 20K
A07R282	315-0105-00			RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A07R283	315-0224-00	B010100	B079999	RES,FXD,FILM:220K OHM,5%,0.25W	57668	NTR25J-E220K
A07R283	315-0822-00	B080000		RES,FXD,FILM:8.2K OHM,5%,0.25W	19701	5043CX8K200J

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A07R284	315-0104-00	B010100	B079999	RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A07R284	321-0435-00	B080000		RES,FXD,FILM:332K OHM,1%,0.125W,TC=T0	07716	CEAD33202F
A07R285	321-0238-00	B010100	B079999	RES,FXD,FILM:2.94K OHM,1%,0.125W,TC=T0	07716	CEAD29400F
A07R285	315-0224-00	B080000		RES,FXD,FILM:220K OHM,5%,0.25W	57668	NTR25J-E220K
A07R286	315-0471-00	B010100	B079999	RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A07R286	315-0104-00	B080000		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A07R287	321-0222-00	B010100	B079999	RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=T0	19701	5033ED2K00F
A07R287	321-0238-00	B080000		RES,FXD,FILM:2.94K OHM,1%,0.125W,TC=T0	07716	CEAD29400F
A07R288	315-0104-00	B010100	B079999	RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A07R288	315-0471-00	B080000		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A07R289	315-0471-00	B010100	B079999	RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A07R289	321-0222-00	B080000		RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=T0	19701	5033ED2K00F
A07R290	315-0334-00	B010100	B079999	RES,FXD,FILM:330K OHM,5%,0.25W	57668	NTR25J-E 330K
A07R290	315-0471-00	B080000		RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A07R291	315-0334-00	B080000		RES,FXD,FILM:330K OHM,5%,0.25W	57668	NTR25J-E 330K
A07R301	308-0237-00			RES,FXD,WW:8.2K OHM,5%,5W	00213	1550S-8200-5
A07R311	308-0336-00			RES,FXD,WW:7K OHM,5%,5W	05347	CS6-7001J
A07R321	315-0152-00			RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A07R331	308-0250-00	B010100	B029999	RES,FXD,WW:195 OHM,1%,5W	05347	CS5-195RQJ
A07R331	308-0079-00	B030000		RES,FXD,WW:117 OHM,5%,5W	00213	1500S-117-5
A07R361	315-0102-00	B010100	B079999	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R365	315-0750-00	B080000		RES,FXD,FILM:75 OHM,5%,0.25W	57668	NTR25J-E750E
A07R366	315-0203-00	B080000		RES,FXD,FILM:20K OHM,5%,0.25W	57668	NTR25J-E 20K
A07R367	315-0102-00	B080000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R368	315-0102-00	B080000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R369	321-0222-00	B080000		RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=T0	19701	5033ED2K00F
A07R370	321-0222-00	B080000		RES,FXD,FILM:2.00K OHM,1%,0.125W,TC=T0	19701	5033ED2K00F
A07R371	315-0102-00	B010100	B079999	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R371	317-0564-00	B080000		RES,FXD,CMPSN:560K OHM,5%,0.125W	01121	BB5645
A07R372	321-0661-00			RES,FXD,FILM:600 OHM,1%,0.125W,TC=T0	19701	5033RD600R0F
A07R373	315-0102-00	B010100	B079999	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R373	315-0101-00	B080000		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A07R374	321-0473-00	B010100	B079999	RES,FXD,FILM:825K OHM,1%,0.125W,TC=T0	07716	CEAD82502F
A07R374	301-0751-00	B080000		RES,FXD,FILM:750 OHM,5%,0.5W	19701	5053CX750R0J
A07R375	315-0102-00	B010100	B079999	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R375	321-0344-00	B080000		RES,FXD,FILM:37.4K OHM,1%,0.125W,TC=T0	19701	5033ED 37K40F
A07R376	315-0751-00	B010100	B079999	RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A07R376	315-0102-00	B080000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R377	315-0102-00	B010100	B079999	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R377	315-0751-00	B080000		RES,FXD,FILM:750 OHM,5%,0.25W	57668	NTR25J-E750E
A07R378	315-0391-00	B080000		RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A07R381	321-0443-00	B010100	B079999	RES,FXD,FILM:402K OHM,1%,0.125W,TC=T0	19701	5043ED402K0F
A07R381	315-0104-00	B080000		RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A07R382	315-0472-00	B010100	B079999	RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A07R383	321-0134-00	B010100	B079999	RES,FXD,FILM:243 OHM,1%,0.125W,TC=T0	19701	5043ED243R0F
A07R383	315-0102-00	B080000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R384	315-0241-00	B010100	B079999	RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A07R384	315-0102-00	B080000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R385	315-0102-00	B010100	B079999	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R385	321-0443-00	B080000		RES,FXD,FILM:402K OHM,1%,0.125W,TC=T0	19701	5043ED402K0F
A07R386	307-0051-00	B010100	B079999	RES,FXD,CMPSN:2.7 OHM,5%,0.5W	01121	EB27G5
A07R386	315-0472-00	B080000		RES,FXD,FILM:4.7K OHM,5%,0.25W	57668	NTR25J-E04K7
A07R387	321-0134-00	B080000		RES,FXD,FILM:243 OHM,1%,0.125W,TC=T0	19701	5043ED243R0F
A07R388	315-0241-00	B080000		RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A07R389	315-0102-00	B080000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R390	307-0051-00	B080000		RES,FXD,CMPSN:2.7 OHM,5%,0.5W	01121	EB27G5
A07R411	315-0200-00	B010100	B079999	RES,FXD,FILM:20 OHM,5%,0.25W	19701	5043CX20R00J
A07R440	321-0020-00			RES,FXD,FILM:15.8 OHM,1%,0.125W,TC=T0	57668	RB14FXE 15E8

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A07R441	321-0053-00	B010100	B079999	RES,FXD,FILM:34.8 OHM,1%,0.125W,TC=T0	91637	CMF55116G34R80F
A07R441	321-0041-00	B080000		RES,FXD,FILM:26.1 OHM,1%,0.125W,TC=T0	91637	CMF55116G26R10F
A07R444	315-0102-00	B010100	B079999	RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R461	308-0757-00			RES,FXD,WW:0.025 OHM,3%,5W	14193	SA50-R025H
A07R462	308-0710-00			RES,FXD,WW:0.27 OHM,5%,1W	75042	BW-20-R2700J
A07R471	307-0056-00			RES,FXD,CMPSN:4.3 OHM,5%,0.5W	01121	EB43G5
A07R472	303-0242-00			RES,FXD,CMPSN:2.4K OHM,5%,1W	01121	GB2425
A07R473	301-0751-00	B010100	B079999	RES,FXD,FILM:750 OHM,5%,0.5W	19701	5053CX750R0J
A07R473	321-0473-00	B080000		RES,FXD,FILM:825K OHM,1%,0.125W,TC=T0	07716	CEAD82502F
A07R474	315-0474-00			RES,FXD,FILM:470K OHM,5%,0.25W	19701	5043CX470KQJ92U
A07R481	321-0469-04			RES,FXD,FILM:750K OHM,1%,.125W,TC=T2	19701	5033RC750K0B
A07R483	315-0122-00			RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A07R484	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A07R485	315-0152-00	B010100	B079999	RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A07R485	308-0399-01	B080000		RES,FXD,WW:10 OHM,5%,5W	91637	CW5100HMS% BULK
A07R487	315-0152-00	B080000		RES,FXD,FILM:1.5K OHM,5%,0.25W	57668	NTR25J-E01K5
A07R488	315-0241-00	B080000		RES,FXD,FILM:240 OHM,5%,0.25W	19701	5043CX240R0J
A07RT271	307-0751-00	B080000		RES,THERMAL:20K OHM,5%	56866	QTM-19J
A07RT311	307-0350-00			RES,THERMAL:7.5 OHM,10%,3.9%/DEG C	80009	307-0350-00
A07RV111	307-0663-00	B010100	B079999	RES,V SENSITIVE:330 V,0.25 W	03508	V250LA4
A07RV221	307-0415-00	B010100	B079999	RES,V SENSITIVE:DISC	03508	V130LA10A
A07RV221	307-0663-00	B080000		RES,V SENSITIVE:330 V,0.25 W	03508	V250LA4
A07RV224	307-0415-00	B080000		RES,V SENSITIVE:DISC	03508	V130LA10A
A07RV401	307-0415-00	B080000		RES,V SENSITIVE:DISC	03508	V130LA10A
A07RV411	307-0415-00	B010100	B079999	RES,V SENSITIVE:DISC	03508	V130LA10A
A07S100	260-2116-01			SWITCH,SLIDE:DPDT,10A,125VAC,POWER	22753	SE1022SDCEPBLORA
A07S401	260-2116-00			SWITCH,SLIDE:DPDT,10A,125VAC,LINE SEL	22753	SE1022SCCEPRHKRA
A07T111	120-1507-00			TRANSFORMER,RF:TOROID	80009	120-1507-00
A07T141	120-1354-00			XFMR,PWR,STPON:TRIGGER,LF	80009	120-1354-00
A07T211	120-1460-00			TRANSFORMER,RF:COMMON MODE	80009	120-1460-00
A07T241	120-1438-00			XFMR,PWR,STPON:CONVERTER HIGH FREQUENCY	80009	120-1438-00
A07T261	120-1266-00			TRANSFORMER,RF:TOROID	80009	120-1266-00
A07T431	120-1415-00			TRANSFORMER,RF:HF DRIVER,CONVERTER	80009	120-1415-00
A07T432	120-0747-00			XFMR,TOROID:	TK1345	120-0747-00
A07TP161	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP162	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP171	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP172	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP173	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP181	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP182	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP183	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP184	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP185	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP411	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP421	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07TP422	214-0579-00			TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A07U181	156-1264-00			MICROCKT,LINEAR:VOLTAGE REGULATOR	27014	LM79M12CPTB
A07U275	156-0495-00	B080000		MICROCKT,LINEAR:OPNL AMPL	01295	LM324N
A07U371	156-1261-00			MICROCKT,LINEAR:VOLTAGE REGULATOR	04713	MC78L15ACP
A07U372	156-1585-00	B010100	B079999	MICROCKT,LINEAR:RGLT PULSE WIDTH MOD,SCRN	12969	UC80054
A07U375	156-1585-02	B080000		MICROCKT,DGTL:SWITCHING RGLTR,1% VREF,SCRN	12969	UC3526N
A07U381	156-1225-01	B010100	B079999	MICROCKT,LINEAR:DUAL COMPARATOR,SCREENED	01295	LM393P3
A07U385	156-1225-01	B080000		MICROCKT,LINEAR:DUAL COMPARATOR,SCREENED	01295	LM393P3
A07U471	156-0846-00			MICROCKT,LINEAR:VOLTAGE RGTR	01295	UA7905CKC
A07U472	156-0285-02	B010100	B079999	MICROCKT,LINEAR:VOLTAGE RGLTR	04713	LM340T-12
A07U472	156-1161-00	B080000		MICROCKT,LINEAR:VOLTAGE REGULATOR,POS,ADJ	12969	UC317T
A07U481	156-0285-02			MICROCKT,LINEAR:VOLTAGE RGLTR	04713	LM340T-12

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A07VR271	152-0175-00			SEMICON DVC,DI:ZEN,SI,5.6V,5%,0.5W,DO-7	14552	T03810976
A07VR375	152-0217-00	B080000		SEMICON DVC,DI:ZEN,SI,8.2V,5%,0.4W,DO-7	04713	SZG20
A07VR481	153-0058-00			SEMICON DVC,DI:SELECTED	04713	SZG231-1
A07VR489	152-0760-00	B080000		SEMICON DVC,DI:ZEN,SI,6.2V,2%,400MW,DO-35	04713	SZG30205
A07W301	196-1157-00	B010100	B091209	LEAD,ELECTRICAL:18 AWG,9.0 L,5-4	80009	196-1157-00
A07W301	196-1157-01	B091210		LEAD,ELECTRICAL:18 AWG,5.5 L,5-4	TK1386	ORDER BY DESCR
A07W421	195-0965-00	B010100	B079999	LEAD,ELECTRICAL:26 AWG,1.5 L,9-2	80009	195-0965-00
A07W421	195-1033-00	B080000		LEAD,ELECTRICAL:26 AWG,2.0 L,9-2	80009	195-1033-00
A07W432	175-3114-00			WIRE,ELECTRICAL:STRD,18 AWG,GRAY,PVC	80009	175-3114-00
A08	670-7528-01	B010100	B030300	CIRCUIT BD ASSY:INTFC	80009	670-7528-01
A08	670-7528-02	B030301	B040744	CIRCUIT BD ASSY:INTFC	80009	670-7528-02
A08	670-7528-03	B040745	B069999	CIRCUIT BD ASSY:INTFC	80009	670-7528-03
A08	670-7528-04	B070000	B079999	CIRCUIT BD ASSY:INTERFACE	80009	670-7528-04
A08	670-7528-05	B080000	B080558	CIRCUIT BD ASSY:INTERFACE	80009	670-7528-05
A08	670-7528-06	B080559	B091330	CIRCUIT BD ASSY:INTERFACE	80009	670-7528-06
A08	670-7528-07	B091331		CIRCUIT BD ASSY:INTERFACE	80009	670-7528-07
A08C100	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C110	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C122	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C130	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C140	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C200	283-0422-00	B010100	B030300	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C300	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C310	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C320	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C325	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C330	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C335	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C340	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C345	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C500	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C510	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C520	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C530	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C540	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C620	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C630	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C640	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C700	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C730	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C810	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08C850	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A08F150	159-0169-00	B030301		FUSE,THERMAL:15A,1200V,104 DEG C	27012	4218A1
A08J150	131-2570-01			CONN,RCPT,ELEC:CKT BD,50/100 CONT,FEMALE	05574	3VH50/1JNK12(000
A08J250	131-2570-01			CONN,RCPT,ELEC:CKT BD,50/100 CONT,FEMALE	05574	3VH50/1JNK12(000
A08J350	131-2570-01			CONN,RCPT,ELEC:CKT BD,50/100 CONT,FEMALE	05574	3VH50/1JNK12(000
A08J450	131-2570-01			CONN,RCPT,ELEC:CKT BD,50/100 CONT,FEMALE	05574	3VH50/1JNK12(000
A08J550	131-2570-01			CONN,RCPT,ELEC:CKT BD,50/100 CONT,FEMALE	05574	3VH50/1JNK12(000
A08J630	131-2401-00			CONN,RCPT,ELEC:2 X 25,MALE	TK1483	082-2543-SD10
A08J650	131-2570-01			CONN,RCPT,ELEC:CKT BD,50/100 CONT,FEMALE	05574	3VH50/1JNK12(000
A08J658	131-1857-00			TERM SET,PIN:36/0.025 SQ PIN,ON 0.1 CTRS	TK1483	082-3643-SS10
A08J746	131-2401-00			CONN,RCPT,ELEC:2 X 25,MALE	TK1483	082-2543-SD10
A08J750	131-2570-01			CONN,RCPT,ELEC:CKT BD,50/100 CONT,FEMALE	05574	3VH50/1JNK12(000
A08J850	131-2570-01			CONN,RCPT,ELEC:CKT BD,50/100 CONT,FEMALE	05574	3VH50/1JNK12(000
A08R200	307-0546-00	B010100	B030300	RES NTWK,FXD,FI:5,750HM,5%,0.15 W	11236	750/770-61-R75
A08R205	307-0546-00	B010100	B030300	RES NTWK,FXD,FI:5,750HM,5%,0.15 W	11236	750/770-61-R75
A08R205	307-0545-00	B030301		RES NTWK,FXD,FI:9,75 OHM,5%,0.15W	57924	4310R-101-750
A08R222	307-0489-00			RES NTWK,FXD,FI:7,100 OHM,20%,1.0W	11236	750-81-R100

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A08R230	307-0489-00			RES NTWK,FXD,FI:7,100 OHM,20%,1.0W	11236	750-81-R100
A08R238	307-0489-00			RES NTWK,FXD,FI:7,100 OHM,20%,1.0W	11236	750-81-R100
A08R251	307-0546-00	B010100	B030300	RES NTWK,FXD,FI:5,750HM,5%,0.15 W	11236	750/770-61-R75
A08R310	307-0501-00	B010100	B030300	RES NTWK,FXD,FI:(5) 50 OHM,5%,0.125W	57924	4306R-101-500
A08R310	307-0545-00	B030301		RES NTWK,FXD,FI:9,75 OHM,5%,0.15W	57924	4310R-101-750
A08R350	307-0546-00	B010100	B030300	RES NTWK,FXD,FI:5,750HM,5%,0.15 W	11236	750/770-61-R75
A08R410	307-0501-00	B030301	B040744	RES NTWK,FXD,FI:(5) 50 OHM,5%,0.125W	57924	4306R-101-500
A08R410	307-0493-00	B040745	B080558	RES NTWK,FXD,FI:(7) 50 OHM,5%,0.125W	11236	750-81-R50 OHM
A08R410	307-0501-00	B080559		RES NTWK,FXD,FI:(5) 50 OHM,5%,0.125W	57924	4306R-101-500
A08R500	307-0546-00	B010100	B030300	RES NTWK,FXD,FI:5,750HM,5%,0.15 W	11236	750/770-61-R75
A08R510	307-0501-00	B010100	B030300	RES NTWK,FXD,FI:(5) 50 OHM,5%,0.125W	57924	4306R-101-500
A08R510	307-0640-00	B030301	B040744	RES NTWK,FXD,FI:9,50 OHM,5%,0.125 W	11236	750-101-R50
A08R510	307-0587-00	B040745		RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A08R511	307-0587-00	B080559		RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A08R610	307-0501-00	B010100	B030300	RES NTWK,FXD,FI:(5) 50 OHM,5%,0.125W	57924	4306R-101-500
A08R610	307-0545-00	B030301		RES NTWK,FXD,FI:9,75 OHM,5%,0.15W	57924	4310R-101-750
A08R700	307-0546-00	B010100	B030300	RES NTWK,FXD,FI:5,750HM,5%,0.15 W	11236	750/770-61-R75
A08U200	156-1682-00	B030301		MICROCKT,DGTL:DUAL 4-5 INPUT OR/NOR GATE	04713	MC10H109LD
A08U300	156-1682-00			MICROCKT,DGTL:DUAL 4-5 INPUT OR/NOR GATE	04713	MC10H109LD
A08U500	156-1682-00			MICROCKT,DGTL:DUAL 4-5 INPUT OR/NOR GATE	04713	MC10H109LD
A08W100	131-2977-00	B010100	B069999	HDR,FLEXSTRIP:	80009	131-2977-00
A08W100	175-9256-00	B070000	B091330	CA ASSY,SP,ELEC:10,22 AWG,12.0 L,RIBBON	87473	ORDER BY DESCR
A08W100	175-9256-01	B091331		CA ASSY,SP,ELEC:10,22 AWG,9.5 L,RIBBON	TK1549	175-9256-01
A08W110	131-2977-00	B010100	B069999	HDR,FLEXSTRIP:	80009	131-2977-00
A08W110	175-9256-00	B070000	B091330	CA ASSY,SP,ELEC:10,22 AWG,12.0 L,RIBBON	87473	ORDER BY DESCR
A08W110	175-9256-01	B091331		CA ASSY,SP,ELEC:10,22 AWG,9.5 L,RIBBON	TK1549	175-9256-01
A08W120	131-2977-00	B010100	B069999	HDR,FLEXSTRIP:	80009	131-2977-00
A08W120	175-9256-00	B070000	B091330	CA ASSY,SP,ELEC:10,22 AWG,12.0 L,RIBBON	87473	ORDER BY DESCR
A08W120	175-9256-01	B091331		CA ASSY,SP,ELEC:10,22 AWG,9.5 L,RIBBON	TK1549	175-9256-01
A08W130	131-2977-00	B010100	B069999	HDR,FLEXSTRIP:	80009	131-2977-00
A08W130	175-9256-00	B070000	B091330	CA ASSY,SP,ELEC:10,22 AWG,12.0 L,RIBBON	87473	ORDER BY DESCR
A08W130	175-9256-01	B091331		CA ASSY,SP,ELEC:10,22 AWG,9.5 L,RIBBON	TK1549	175-9256-01
A09	670-7527-01	B010100	B049999	CIRCUIT BD ASSY:CONTROL PROCESSOR	80009	670-7527-01
A09	670-7527-02	B050000	B079999	CIRCUIT BD ASSY:CONTROL PROCESSOR	80009	670-7527-02
A09	670-7527-03	B080000	B089999	CIRCUIT BD ASSY:CONTROL PROCESSOR	80009	670-7527-03
A09	670-7527-04	B090000		CIRCUIT BD ASSY:CONTROL PROCESSOR	80009	670-7527-04
A09BT150	146-0041-00	B010100	B091378	BATTERY,DRY:SAFETY CONTROLLED	00681	3440LP
A09BT150	146-0041-01	B091379		BATTERY,DRY:SAFETY CONTROLLED	80009	146-0041-01
A09C105	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C110	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C115	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C120	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C125	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C130	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C135	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C140	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C145	290-0367-00			CAP,FXD,ELCTLT:70UF,20%,6V NONPOLARIZED	56289	30D1802
A09C160	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C167	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C200	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C207	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C214	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C217	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C220	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C224	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C236	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C243	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C248	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
A09C252	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C257	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C267	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C330	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C333	283-0423-00			CAP,FXD,CER DI:0.22UF,+80-20%,50V	04222	MD015E224ZAA
A09C336	283-0423-00			CAP,FXD,CER DI:0.22UF,+80-20%,50V	04222	MD015E224ZAA
A09C339	283-0423-00			CAP,FXD,CER DI:0.22UF,+80-20%,50V	04222	MD015E224ZAA
A09C343	283-0423-00			CAP,FXD,CER DI:0.22UF,+80-20%,50V	04222	MD015E224ZAA
A09C351	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C357	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C425	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C433	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C436	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C439	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C443	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09C467	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A09CR138	152-0075-00			SEMICOND DVC,DI:SW,GE,22V,80MW,DO-7	14433	G866
A09DS321	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A09DS322	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A09DS323	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A09DS324	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A09DS421	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A09DS422	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A09Q140	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A09Q141	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A09Q219	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A09Q221	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A09R138	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A09R139	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A09R140	321-0290-00			RES,FXD,FILM:10.2K OHM,1%,0.125W,TC=TO	19701	5043ED10K20F
A09R141	321-0292-00			RES,FXD,FILM:10.7K OHM,1%,0.125W,TC=TO	07716	CEAD10701F
A09R142	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A09R145	315-0201-00			RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A09R201	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A09R207	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A09R212	307-0446-00			RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A09R214	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A09R217	315-0332-00	B010100	B079999	RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A09R217	315-0101-00	B080000		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A09R223	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A09R228	315-0681-00			RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A09R239	315-0471-00			RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A09R246	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A09R248	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A09R249	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A09R250	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A09R251	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A09R252	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A09R253	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A09R361	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A09R363	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A09R422	307-0503-00			RES NTWK,FXD,FI:(9) 510 OHM,20%,0.125W	11236	750-101-R510
A09R423	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A09R446	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A09R449	307-0446-00			RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A09R459	307-0446-00			RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A09R461	307-1137-00			RES NTWK,FXD,FI:8,0.005 OHM,+150-50%,0.125W	00779	435704-8
A09R467	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A09U105	160-1575-01	B010100	8049999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1575-01
A09U105	160-1575-02	B050000	8089999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1575-02
A09U105	160-1575-03	B090000		MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1575-03
A09U110	160-1576-01	B010100	8049999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1576-01
A09U110	160-1576-02	B050000	8089999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1576-02
A09U110	160-1576-03	B090000		MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1576-03
A09U115	160-1577-01	B010100	8049999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1577-01
A09U115	160-1577-02	B050000	8089999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1577-02
A09U115	160-1577-03	B090000		MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1577-03
A09U120	160-1578-01	B010100	8049999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1578-01
A09U120	160-1578-02	B050000	8089999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1578-02
A09U120	160-1578-03	B090000		MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1578-03
A09U125	160-1579-01	B010100	8049999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1579-01
A09U125	160-1579-02	B050000		MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1579-02
A09U130	160-1580-01	B010100	8049999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1580-01
A09U130	160-1580-02	B050000	8089999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1580-02
A09U130	160-1580-03	B090000		MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1580-03
A09U135	160-1581-01	B010100	8049999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1581-01
A09U135	160-1581-02	B050000	8079999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1581-02
A09U135	160-1581-03	B080000	8089999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1581-03
A09U135	160-1581-04	B090000		MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1581-04
A09U140	156-1225-01	B010100	8049999	MICROCKT,LINEAR:DUAL COMPARATOR,SCREENED	01295	LM393P3
A09U156	156-0956-02	B050000		MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A09U160	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A09U164	156-0422-02			MICROCKT,DGTL:UP/DOWN SYN BINARY CNTR,SCRN	18324	N74LS191NB
A09U201	156-0530-02			MICROCKT,DGTL:QUAD 2-INP MUX,SCRN	01295	SN74LS157NP3
A09U204	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A09U207	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A09U211	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A09U214	156-0541-02			MICROCKT,DGTL:DUAL 2-TO 4-LINE DCDR/DEMUX	04713	SN74LS139NDS
A09U217	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A09U220	156-0865-02			MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	01295	SN74LS273NP3
A09U224	160-1582-02	B010100	8089999	MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1582-02
A09U224	160-1582-03	B090000		MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1582-03
A09U229	156-1632-00			MICROCKT,DGTL:CMOS,2048 X 8 SRAM	TK1015	HM6116LP-4
A09U233	156-0541-02			MICROCKT,DGTL:DUAL 2-TO 4-LINE DCDR/DEMUX	04713	SN74LS139NDS
A09U236	156-0382-02			MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	18324	N74LS00NB
A09U239	156-1065-01			MICROCKT,DGTL:OCTAL D TYPE TRANS LATCHES	04713	SN74LS373 ND/JD
A09U243	156-0180-04			MICROCKT,DGTL:QUAD 2 INP NAND GATE,	18324	N74S00(NB OR FB)
A09U246	156-1428-02			MICROCKT,DGTL:CLOCK GEN & DRIVER,SCRN	34649	D8284A
A09U254	156-0323-02			MICROCKT,DGTL:HEX INVERTER,BURN-IN	18324	N74S04(NB OR FB)
A09U255	156-0693-02			MICROCKT,DGTL:DUAL 2 TO 4 LINE DCDR/DEMUX	01295	SN74S139NP3
A09U257	156-0739-02			MICROCKT,DGTL:QUAD 2 INP OR GATE,SCREENED	18324	N74S32(NB OR FB)
A09U258	156-0478-02			MICROCKT,DGTL:DUAL 4-INP & GATE,SCRN	01295	SN74LS21NP3
A09U261	156-0422-02			MICROCKT,DGTL:UP/DOWN SYN BINARY CNTR,SCRN	18324	N74LS191NB
A09U262	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A09U264	156-0422-02			MICROCKT,DGTL:UP/DOWN SYN BINARY CNTR,SCRN	18324	N74LS191NB
A09U267	156-0422-02			MICROCKT,DGTL:UP/DOWN SYN BINARY CNTR,SCRN	18324	N74LS191NB
A09U325	156-0331-03			MICROCKT,DGTL:DUAL D TYPE POSITIVE EDGE	01295	SN74S74NP3
A09U329	156-1697-00			MICROCKT,DGTL:STTL,64K DRAM CONTROLLER	80009	156-1697-00
A09U333	156-1626-00			MICROCKT,DGTL:NMOS,65536 X 1 DRAM	33297	UPD4164C-2
A09U336	156-1626-00			MICROCKT,DGTL:NMOS,65536 X 1 DRAM	33297	UPD4164C-2
A09U339	156-1626-00			MICROCKT,DGTL:NMOS,65536 X 1 DRAM	33297	UPD4164C-2
A09U343	156-1626-00			MICROCKT,DGTL:NMOS,65536 X 1 DRAM	33297	UPD4164C-2
A09U347	156-1609-00			MICROCKT,DGTL:HMO5,8 BIT MICROPROCESSOR	34649	D8088PC
A09U351	156-1065-01			MICROCKT,DGTL:OCTAL D TYPE TRANS LATCHES	04713	SN74LS373 ND/JD
A09U354	156-1318-00			MICROCKT,DGTL:LSTTL,4-BIT BISTABLE LATCH	01295	SN74LS375NP3
A09U357	156-0541-02			MICROCKT,DGTL:DUAL 2-TO 4-LINE DCDR/DEMUX	04713	SN74LS139NDS

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A09U361	156-0459-02			MICROCKT,DGTL:QUAD 2 INPUT & GATE,BURN IN	18324	N74S08(NB OR FB)
A09U364	156-0982-03			MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	01295	SN74LS374N3
A09U367	156-1273-01			MICROCKT,DGTL:8-BIT EQUAL TO COMPTR,SCRN	34335	25LS2521 PCB2
A09U425	156-0331-03			MICROCKT,DGTL:DUAL D TYPE POSITIVE EDGE	01295	SN74S74NP3
A09U433	156-1626-00			MICROCKT,DGTL:NMOS,65536 X 1 DRAM	33297	UPD4164C-2
A09U436	156-1626-00			MICROCKT,DGTL:NMOS,65536 X 1 DRAM	33297	UPD4164C-2
A09U439	156-1626-00			MICROCKT,DGTL:NMOS,65536 X 1 DRAM	33297	UPD4164C-2
A09U443	156-1626-00			MICROCKT,DGTL:NMOS,65536 X 1 DRAM	33297	UPD4164C-2
A09U451	156-1065-01			MICROCKT,DGTL:OCTAL D TYPE TRANS LATCHES	04713	SN74LS373 ND/JD
A09U454	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A09U457	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A09U464	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A09U467	156-1273-01			MICROCKT,DGTL:8-BIT EQUAL TO COMPTR,SCRN	34335	25LS2521 PCB2
A09VR142	152-0689-00			SEMICON DVC,DI:ZEN,SI,3.9 V,5 %,0.4W,DO-35	04713	1N748A
A09VR217	152-0689-00	B080000		SEMICON DVC,DI:ZEN,SI,3.9 V,5 %,0.4W,DO-35	04713	1N748A
A09Y225	158-0244-00			XTAL UNIT,QTZ:24MHZ 0.01%,SERIES RESONANT	33096	CCAT101405
A09Y250	158-0135-00			XTAL UNIT,QTZ:14.7456 MHZ 0.01%,SERIES	33096	PB-1124
A10	670-7526-00	B010100	B029999	CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-00
A10	670-7526-01	B030000	B030488	CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-01
A10	670-7526-02	B030489	B079999	CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-02
A10	670-7526-03	B080000	B091259	CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-03
A10	670-7526-05	B091260		CIRCUIT BD ASSY:I/O PROCESSOR	80009	670-7526-05
A10C110	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C115	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C120	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C125	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C130	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C140	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C190	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C195	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C210	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C211	285-0862-00			CAP,FXD,PLASTIC:0.001,10%,100V	19396	DU490/74-28219
A10C213	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C214	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C230	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C235	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C310	283-0059-00			CAP,FXD,CER DI:1UF,+80-20%,25V	31433	C330C105M5R5CA
A10C323	281-0819-00			CAP,FXD,CER DI:33 PF,5%,50V	04222	GC105A330J
A10C331	283-0423-00			CAP,FXD,CER DI:0.22UF,+80-20%,50V	04222	MD015E224ZAA
A10C332	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C333	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C334	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C335	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C345	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C350	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C360	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C365	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C370	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C380	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C385	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C395	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C434	290-0847-00			CAP,FXD,ELCTLT:47UF,+50-20%,10WVDC	55680	TLB1A470MAA2
A10C437	281-0809-00	B091260		CAP,FXD,CER DI:200 PF,5%,100V	04222	MA101A201JAA
A10C465	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C470	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C475	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C480	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C485	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A10C490	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C495	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C510	290-0287-00			CAP,FXD,ELCTLT:47UF,20%,25V	56289	30D476X0025CC4
A10C550	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C560	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C565	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C570	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C575	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C580	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C584	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C590	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C595	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A10C610	290-0287-00			CAP,FXD,ELCTLT:47UF,20%,25V	56289	30D476X0025CC4
A10CR220	152-0075-00	B080000		SEMICON DVC,DI:SW,GE,22V,80MW,DO-7	14433	G866
A10CR438	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A10DS532	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A10DS534	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A10DS536	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A10DS538	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A10L645	108-0520-00			COIL,RF:FIXED,2.2UH	80009	108-0520-00
A10L646	108-0520-00			COIL,RF:FIXED,2.2UH	80009	108-0520-00
A10LS410	119-1388-00			XDCR,AUDIO:0-150V P-P	TK1451	MS-1
A10Q328	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A10Q423	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A10Q424	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A10Q425	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A10Q426	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A10Q438	151-0188-00			TRANSISTOR:PMP,SI,TO-92	80009	151-0188-00
A10R110	315-0301-00			RES,FXD,FILM:300 OHM,5%,0.25W	57668	NTR25J-E300E
A10R220	315-0562-00			RES,FXD,FILM:5.6K OHM,5%,0.25W	57668	NTR25J-E05K6
A10R222	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R223	315-0303-00			RES,FXD,FILM:30K OHM,5%,0.25W	19701	5043CX30K00J
A10R226	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R255	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R275	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R284	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R285	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R295	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R313	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R314	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A10R315	315-0104-00			RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A10R320	311-1225-00			RES,VAR,NONW:TRMR,1K OHM,0.5W	32997	3386F-T04-102
A10R321	315-0512-00			RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A10R322	315-0104-00			RES,FXD,FILM:100K OHM,5%,0.25W	57668	NTR25J-E100K
A10R323	315-0122-00			RES,FXD,FILM:1.2K OHM,5%,0.25W	57668	NTR25J-E01K2
A10R324	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A10R325	315-0221-00			RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A10R327	315-0220-00			RES,FXD,FILM:22 OHM,5%,0.25W	19701	5043CX22R00J
A10R328	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R329	315-0513-00			RES,FXD,FILM:51K OHM,5%,0.25W	57668	NTR25J-E51K0
A10R338	321-0305-00			RES,FXD,FILM:14.7K OHM,1%,0.125W,TC=TO	19701	5033ED14K70F
A10R340	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R350	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R418	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R423	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R424	315-0103-00	B010100	8030488	RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R427	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R428	321-0403-00	B010100	8029999	RES,FXD,FILM:154K OHM,1%,0.125W,TC=TO	07716	CEAD15402F

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A10R428	321-0414-00	B030000		RES,FXD,FILM:200K OHM,1%,0.125W,TC=T0	07716	CEAD20002F
A10R429	315-0332-00			RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A10R430	321-0334-00			RES,FXD,FILM:29.4K OHM,1%,0.125W,TC=T0	07716	CEAD29401F
A10R431	315-0164-00	B030489		RES,FXD,FILM:160K OHM,5%,0.25W	57668	NTR25J-E160K
A10R432	321-0363-00			RES,FXD,FILM:59.0K OHM,1%,0.125W,TC=T0	07716	CEAD59001F
A10R433	317-0103-00	B080000		RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A10R435	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R436	321-0293-00			RES,FXD,FILM:11.0K OHM,1%,0.125W,TC=T0	07716	CEAD11001F
A10R437	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R438	307-0526-00			RES NTWK,FXD,FI:5.510 OHM,10%,0.125 W	11236	750-61-R510 OHM
A10R439	317-0102-00	B080000		RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A10R450	307-0446-00			RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A10R452	307-0446-00			RES NTWK,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K
A10R455	307-1137-00			RES NTWK,FXD,FI:8.0.005 OHM,+150-50%,0.125W	00779	435704-8
A10R480	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A10R495	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R520	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R522	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A10R545	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R575	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A10R650	315-0563-00			RES,FXD,FILM:56K OHM,5%,0.25W	19701	5043CX56K00J
A10R652	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A10R655	315-0563-00			RES,FXD,FILM:56K OHM,5%,0.25W	19701	5043CX56K00J
A10S538	260-1962-00			SWITCH,PUSH:SPDT,0.4VA,20V	09353	8125AE
A10U110	156-0515-04	B010100	B080697	MICROCKT,DGTL:TPL 2 CHAN MUX,CHK	80009	156-0515-04
A10U110	156-0515-03	B080698		MICROCKT,DGTL:TPL 2 CHAN MUX,SCREENED	02735	CD4053BF
A10U115	156-0844-02			MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A10U120	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A10U125	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A10U130	156-0693-02			MICROCKT,DGTL:DUAL 2 TO 4 LINE DCDR/DEMUX	01295	SN74LS139NP3
A10U135	156-0982-03			MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	01295	SN74LS374N3
A10U145	156-1594-00			MICROCKT,DGTL:NMOS,2048 X 8 SRAM	TK1015	HM6116P-3(DP-24)
A10U150	156-1594-00			MICROCKT,DGTL:NMOS,2048 X 8 SRAM	TK1015	HM6116P-3(DP-24)
A10U160	160-1569-01			MICROCKT,DGTL:8192 X 8 EPROM,PRGM	80009	160-1569-01
A10U165	160-1570-01			MICROCKT,DGTL:8192 X 8 EPROM,PRGM	80009	160-1570-01
A10U170	160-1571-01			MICROCKT,DGTL:8192 X 8 EPROM,PRGM	80009	160-1571-01
A10U180	160-1572-01			MICROCKT,DGTL:8192 X 8 EPROM,PRGM	80009	160-1572-01
A10U185	160-1573-01			MICROCKT,DGTL:8192 X 8 EPROM,PRGM	80009	160-1573-01
A10U190	156-0982-03			MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	01295	SN74LS374N3
A10U210	156-1312-00			MICROCKT,LINER:SAMPLE/HOLD AMPLIFIER	06665	SMP11-004Y
A10U215	156-0495-02			MICROCKT,LINER:QUAD OPNL AMPL,SELECTED	01295	LM324J4
A10U225	156-0180-04			MICROCKT,DGTL:QUAD 2 INP NAND GATE,	18324	N74S00(NB OR FB)
A10U230	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	01295	SN74LS74ANP3
A10U235	156-0651-02			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	01295	SN74LS164NP3
A10U270	156-0480-02			MICROCKT,DGTL:QUAD 2-INP & GATE,SCRN,	01295	SN74LS08NP3
A10U295	156-0651-02			MICROCKT,DGTL:8-BIT PRL-OUT SER SHF RGTR	01295	SN74LS164NP3
A10U335	156-0865-02			MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	01295	SN74LS273NP3
A10U340	156-0735-02			MICROCKT,DGTL:4-BIT BISTABLE LCH,SCRN	01295	SN74LS75NP3
A10U345	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A10U350	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A10U355	156-0876-01			MICROCKT,DGTL:HEX SCHMITT TRIGGER,SCRN	27014	MM74C14N
A10U360	156-0645-02			MICROCKT,DGTL:HEX INV ST NAND GATES,SCRN	04713	SN74LS14NDS
A10U365	156-0180-04			MICROCKT,DGTL:QUAD 2 INP NAND GATE,	18324	N74S00(NB OR FB)
A10U370	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	01295	SN74LS393NP3
A10U375	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	01295	SN74LS74ANP3
A10U380	156-0694-02			MICROCKT,DGTL:DECODER/3 LINE TO 8 LINE,SCRN	01295	SN74LS138N3/J4
A10U385	156-0331-03			MICROCKT,DGTL:DUAL D TYPE POSITIVE EDGE	01295	SN74S74NP3
A10U390	156-0865-02			MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	01295	SN74LS273NP3

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discont			
A10U425	156-0402-02			MICROCKT, LINEAR: TIMER, CHECKED	27014	LM555CN/A+
A10U445	156-0983-02			MICROCKT, DGTL: NMOS, 8-BIT MICROPRC	50088	3880N-4
A10U460	156-0392-03			MICROCKT, DGTL: QUAD LATCH W/CLEAR, SCRNL	07263	74LS175PCQR
A10U465	156-0381-02			MICROCKT, DGTL: QUAD 2-INP EXCL OR GATE	07263	74LS86PCQR
A10U470	156-0957-01			MICROCKT, DGTL: SYN 4 BIT UP/DOWN BINARY CNTR	27014	DM74LS169A NA+
A10U475	156-0957-01			MICROCKT, DGTL: SYN 4 BIT UP/DOWN BINARY CNTR	27014	DM74LS169A NA+
A10U480	156-0956-02			MICROCKT, DGTL: OCTAL BFR W/3 STATE OUT, SCRNL	01295	SN74LS244NP3
A10U485	156-0956-02			MICROCKT, DGTL: OCTAL BFR W/3 STATE OUT, SCRNL	01295	SN74LS244NP3
A10U490	156-0956-02			MICROCKT, DGTL: OCTAL BFR W/3 STATE OUT, SCRNL	01295	SN74LS244NP3
A10U495	156-0452-02			MICROCKT, DGTL: 4-WIDE, 2-INP AOI, SCREENED	04713	SN74LS54 ND/JD
A10U550	156-1111-02			MICROCKT, DGTL: OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A10U555	156-1065-01			MICROCKT, DGTL: OCTAL D TYPE TRANS LATCHES	04713	SN74LS373 ND/JD
A10U560	156-1277-00			MICROCKT, DGTL: LSTTL, 3-STATE OCTAL BFR, SCRNL	27014	DM81LS95ANA+
A10U565	156-1220-01			MICROCKT, DGTL: HEX BUS DRIVER, SCREENED	01295	SN74LS365NP3
A10U570	156-0956-02			MICROCKT, DGTL: OCTAL BFR W/3 STATE OUT, SCRNL	01295	SN74LS244NP3
A10U575	156-0479-02			MICROCKT, DGTL: QUAD 2-INP OR GATE, SCRNL	01295	SN74LS32NP3
A10U580	156-1346-00			MICROCKT, DGTL: NMOS, 64 X 4 FIFO, SCRNL	07263	3341A
A10U585	156-1346-00			MICROCKT, DGTL: NMOS, 64 X 4 FIFO, SCRNL	07263	3341A
A10U590	156-0989-02			MICROCKT, DGTL: 4 X 4 RGTR FILE W/3 STATE OUT	01295	SN74LS670NP3
A10U595	156-0989-02			MICROCKT, DGTL: 4 X 4 RGTR FILE W/3 STATE OUT	01295	SN74LS670NP3
A10VR417	152-0243-00			SEMICON DVC, DI: ZEN, SI, 15V, 5%, 0.4W, DO-7	04713	SZ13203 (1N965B)
A10Y415	119-1555-00			OSCILLATOR, RF: 4MHZ, 0.01%, CRYSTAL	22929	XO-33D
A11	670-7525-00	B010100	B030300	CIRCUIT BD ASSY: DISPLAY	80009	670-7525-00
A11	670-7525-01	B030301	B040329	CIRCUIT BD ASSY: DISPLAY	80009	670-7525-01
A11	670-7525-02	B040350	B040494	CIRCUIT BD ASSY: DISPLAY	80009	670-7525-02
A11	670-7525-03	B040495	B090244	CIRCUIT BD ASSY: DISPLAY	80009	670-7525-03
A11	670-7525-04	B090245		CIRCUIT BD ASSY: DISPLAY	80009	670-7525-04
A11C105	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C148	290-0967-00			CAP, FXD, ELCTL: 22UF, +50-10%, 25V	55680	TLB1E220TAAANA
A11C205	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C208	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C210	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C225	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C245	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C250	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C255	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C260	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C265	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C270	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C280	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C285	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C290	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C298	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C300	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C304	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C308	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C315	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C340	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C400	283-0178-00	B040350		CAP, FXD, CER DI: 0.1UF, 20%, 100V	05397	C330C104Z1U1CA
A11C405	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C406	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C408	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C410	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C415	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C420	283-0422-00	B010100	B030300	CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C425	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C430	283-0422-00			CAP, FXD, CER DI: 0.047UF, +80-20%, 50V	04222	MD015E473ZAA
A11C431	281-0808-00	B030301	B040350	CAP, FXD, CER DI: 7 PF, 20%, 100V	04222	MA101A7R04AA

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A11C435	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C445	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C446	281-0811-00			CAP,FXD,CER DI:10PF,10%,100V	04222	MA101A100KAA
A11C450	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C455	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C456	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C460	283-0422-00	B090245		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C465	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C470	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C475	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C480	283-0637-00			CAP,FXD,MICA DI:20PF,2.5%,500V	00853	D155E20000
A11C485	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C490	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C498	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C500	283-0422-00	B010100	B030300	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C505	283-0422-00	B010100	B030300	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C508	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C510	283-0422-00	B010100	B030300	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C515	283-0422-00	B010100	B030300	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C520	283-0422-00	B010100	B030300	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C525	281-0775-00	B040350		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A11C526	281-0775-00	B040350		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A11C531	281-0808-00	B010100	B040349	CAP,FXD,CER DI:7 PF,20%,100V	04222	MA101A7R04AA
A11C531	281-0759-00	B040350	B090244	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A11C555	281-0811-00	B030251	B040349	CAP,FXD,CER DI:10PF,10%,100V	04222	MA101A100KAA
A11C596	283-0421-00			CAP,FXD,CER DI:0.1UF,+80-20%,50V	04222	MD015C104MAA
A11C597	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C598	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C608	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C610	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C615	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C620	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C621	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C625	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11C630	283-0422-00	B030301		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A11CR305	152-0141-02	B010100	B040349	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A11CR305	152-0322-00	B040350		SEMICON DVC,DI:SchOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A11CR398	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A11CR465	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A11CR476	152-0322-00			SEMICON DVC,DI:SchOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A11DL440	119-1416-00	B010100	B090244	DELAY LINE,ELEC:5NS,100 OHM,TAPPED	01961	PE 20661-001
A11J110	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J148	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J155	131-1425-00			CONN,RCPT,ELEC:RTANG HEADER,1 X 36,0.1 SP	22526	65521-136
A11J175	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J190	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J275	131-0608-00	B010100	B090244	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J440	131-0608-00	B010100	B090244	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J460	131-0608-00	B010100	B090244	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J462	131-0608-00	B010100	B090244	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J508	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J560	131-0608-00	B010100	B090244	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11J625	131-0608-00	B010100	B090244	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11L155	108-0520-00			COIL,RF:FIXED,2.2UH	80009	108-0520-00
A11L446	108-0182-00			COIL,RF:FIXED,293NH	80009	108-0182-00
A11P155	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A11P275	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A11P440	131-0993-00	B010100	B090244	BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A11R160	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A11R170	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R175	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R180	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R185	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R190	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R198	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A11R230	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R235	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R240	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R245	315-0201-00			RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A11R300	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A11R301	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A11R302	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A11R303	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A11R304	315-0151-00			RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A11R305	317-0102-00	B040350	B090244	RES,FXD,CMPNS:1K OHM,5%,0.125W	01121	BB1025
A11R305	315-0102-00	B090245		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A11R308	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R310	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A11R320	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R395	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R396	315-0391-00			RES,FXD,FILM:390 OHM,5%,0.25W	57668	NTR25J-E390E
A11R397	315-0151-00			RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A11R398	315-0272-00			RES,FXD,FILM:2.7K OHM,5%,0.25W	57668	NTR25J-E02K7
A11R410	307-0587-00	B010100	B030300	RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R420	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R422	315-0680-00	B090245		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R430	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R432	315-0680-00	B010100	B030300	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R432	315-0101-00	B030301	B040350	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R434	315-0221-00	B030300	B090244	RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A11R435	315-0680-00	B010100	B090244	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R436	315-0680-00	B030301	B090244	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R437	315-0680-00	B090245		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R440	315-0680-00	B010100	B090244	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R442	315-0101-00	B010100	B090244	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R443	315-0101-00	B040350	B090244	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R444	315-0680-00	B090245		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R445	315-0512-00			RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A11R446	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A11R450	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R452	315-0680-00			RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R455	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R460	315-0201-00	B090245		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A11R465	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R466	307-0587-00	B090245		RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R470	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A11R475	315-0680-00	B010100	B040349	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R475	315-0101-00	B040350	B090244	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R480	315-0182-00			RES,FXD,FILM:1.8K OHM,5%,0.25W	57668	NTR25J-E1K8
A11R481	315-0680-00			RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R482	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A11R485	315-0181-00			RES,FXD,FILM:180 OHM,5%,0.25W	57668	NTR25J-E180E
A11R486	315-0271-00			RES,FXD,FILM:270 OHM,5%,0.25W	57668	NTR25J-E270E
A11R490	315-0821-00			RES,FXD,FILM:820 OHM,5%,0.25W	19701	5043CX820R0J
A11R492	315-0680-00	B030301		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R495	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A11R505	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R508	315-0680-00	B010100	B030300	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A11R510	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R520	307-0587-00	B010100	B030300	RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R530	307-0587-00	B030301		RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R531	317-0161-00	B010100	B040349	RES,FXD,CMPSN:160 OHM,5%,0.125W	01121	BB1615
A11R531	315-0101-00	B040350	B090244	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11R550	317-0101-00	B030251	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A11R555	317-0101-00	B030251	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A11R575	307-0811-00			RES NTWK,FXD,FI:6,180 OHM,6,270 OHM	01121	316T110
A11R600	307-0587-00	B030301		RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A11R630	315-0101-00	B030301		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A11TP425	131-0608-00	B090245		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11TP445	131-0608-00	B090245		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11TP475	131-0608-00	B090245		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11TP626	131-0608-00	B090245		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11TP628	131-0608-00	B090245		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11TP660	131-0608-00	B090245		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A11U195	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	01295	SN74LS393NP3
A11U200	156-1611-00			MICROCKT,DGTL:ASTTL,DUAL D TYPE EDGE-TRIG	80009	156-1611-00
A11U202	156-0946-00			MICROCKT,DGTL:MOS,TV CAMERA SYNC GEN	80009	156-0946-00
A11U205	160-1107-00			MICROCKT,DGTL:256 X 4 PROM,PRGM	80009	160-1107-00
A11U208	156-0865-02			MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	01295	SN74LS273NP3
A11U210	156-1708-00			MICROCKT,DGTL:TTL,OCTAL D FF W/CLEAR	01295	SN74273NP3
A11U215	156-0865-02			MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	01295	SN74LS273NP3
A11U220	156-0982-03			MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	01295	SN74LS374N3
A11U225	156-0956-02			MICROCKT,DGTL:OCTAL BFR W/3 STATE OUT,SCRN	01295	SN74LS244NP3
A11U230	156-0982-03			MICROCKT,DGTL:OCTAL-D-EDGE TRIG FF,SCRN	01295	SN74LS374N3
A11U238	156-1594-00			MICROCKT,DGTL:N MOS,2048 X 8 SRAM	TK1015	HM6116P-3(DP-24)
A11U245	156-1040-02			MICROCKT,DGTL:DUAL 2-WIDE 2 INPUT	07263	74S51(PC OR DC)
A11U250	156-0784-02			MICROCKT,DGTL:SYNC 4-BIT BINARY COUNTER	01295	SN74LS163AN P3
A11U255	156-0331-03			MICROCKT,DGTL:DUAL D TYPE POSITIVE EDGE	01295	SN74S74NP3
A11U260	156-0948-02			MICROCKT,DGTL:QUAD D FF,SCRN	01295	SN74S175J4
A11U265	156-0530-02			MICROCKT,DGTL:QUAD 2-INP MUX,SCRN	01295	SN74LS157NP3
A11U270	156-0530-02			MICROCKT,DGTL:QUAD 2-INP MUX,SCRN	01295	SN74LS157NP3
A11U275	156-0530-02	B010100	B030300	MICROCKT,DGTL:QUAD 2-INP MUX,SCRN	01295	SN74LS157NP3
A11U280	156-0989-02			MICROCKT,DGTL:4 X 4 RGTR FILE W/3 STATE OUT	01295	SN74LS670NP3
A11U285	156-0989-02			MICROCKT,DGTL:4 X 4 RGTR FILE W/3 STATE OUT	01295	SN74LS670NP3
A11U290	156-0989-02			MICROCKT,DGTL:4 X 4 RGTR FILE W/3 STATE OUT	01295	SN74LS670NP3
A11U295	156-0386-02			MICROCKT,DGTL:TRIPLE 3-INP NAND GATE,SCRN	07263	74LS10PCQR
A11U298	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	01295	SN74LS74ANP3
A11U308	156-0768-01			MICROCKT,DGTL:BIDIRECT UNIV SR,SCREENED	01295	SN74LS194ANP3
A11U310	156-0865-02			MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	01295	SN74LS273NP3
A11U318	160-1583-00	B010100	B092494	MICROCKT,DGTL:2048 X 8 EPROM,PRGM	80009	160-1583-00
A11U318	160-1583-01	B092495		MICROCKT,DGTL:2048 X 8 EPROM,PRGM	80009	160-1583-01
A11U325	156-0865-02			MICROCKT,DGTL:OCTAL D FF W/CLEAR,SCRN	01295	SN74LS273NP3
A11U330	156-0989-02			MICROCKT,DGTL:4 X 4 RGTR FILE W/3 STATE OUT	01295	SN74LS670NP3
A11U335	156-0989-02			MICROCKT,DGTL:4 X 4 RGTR FILE W/3 STATE OUT	01295	SN74LS670NP3
A11U340	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A11U345	156-0480-02			MICROCKT,DGTL:QUAD 2-INP & GATE,SCRN,	01295	SN74LS08NP3
A11U350	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	07263	74LS04PCQR
A11U355	156-0739-02			MICROCKT,DGTL:QUAD 2 INP OR GATE,SCREENED	18324	N74S32(NB OR FB)
A11U360	156-0331-03			MICROCKT,DGTL:DUAL D TYPE POSITIVE EDGE	01295	SN74S74NP3
A11U365	156-0784-02			MICROCKT,DGTL:SYNC 4-BIT BINARY COUNTER	01295	SN74LS163AN P3
A11U370	156-0784-02			MICROCKT,DGTL:SYNC 4-BIT BINARY COUNTER	01295	SN74LS163AN P3
A11U375	156-0679-01			MICROCKT,DGTL:4-BIT BINARY ADDER,SCRN	04713	SN74LS283NDS
A11U380	156-0679-01			MICROCKT,DGTL:4-BIT BINARY ADDER,SCRN	04713	SN74LS283NDS
A11U385	156-0994-02			MICROCKT,DGTL:8 INPUT DATA SEL/MUX,SCRN	01295	SN74LS151NP3

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A11U390	156-0382-02			MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	18324	N74LS00NB
A11U400	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A11U405	156-1611-00			MICROCKT,DGTL:ASTTL,DUAL D TYPE EDGE-TRIG	80009	156-1611-00
A11U408	156-0768-01			MICROCKT,DGTL:BIDIRECT UNIV SR,SCREENED	01295	SN74LS194ANP3
A11U410	156-0465-02			MICROCKT,DGTL:8-INP NAND GATE,SCRN	01295	SN74LS30NP3
A11U415	156-0388-03			MICROCKT,DGTL:DUAL D FLIP-FLOP,SCRN	01295	SN74LS74ANP3
A11U420	156-0382-02			MICROCKT,DGTL:QUAD 2 INP NAND GATE BURN	18324	N74LS00NB
A11U425	156-1313-00			MICROCKT,DGTL:LS TTL,8-BIT SHIFT REGISTER	01295	SN74LS166N3/J4
A11U430	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	07263	74LS04PCQR
A11U435	156-0325-02			MICROCKT,DGTL:DUAL 4/1 LINE DATA,BURN-IN	80009	156-0325-02
A11U450	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A11U451	156-1639-01	B090245		MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A11U455	156-1038-01	B010100	B090244	MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A11U465	156-1667-00			MICROCKT,DGTL:SCREENED	04713	MC10H164LD
A11U470	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A11U475	156-1674-00			MICROCKT,DGTL:SCREENED	04713	MC10H104LD
A11U480	156-0381-02			MICROCKT,DGTL:QUAD 2-INP EXCL OR GATE	07263	74LS86PCQR
A11U485	156-1172-01			MICROCKT,DGTL:DUAL 4 BIT BIN CNTR,SCRN	01295	SN74LS393NP3
A11U490	156-0804-02			MICROCKT,DGTL:QUADRUPE S-R LATCH	01295	SN74LS279NP3/JP4
A11U495	156-0118-03			MICROCKT,DGTL:1 DUAL J-K FF,BURN-IN	01295	SN74S112JP4
A11U498	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPT	04713	MC3431P
A11U500	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPT	04713	MC3431P
A11U505	156-0543-01			MICROCKT,DGTL:HEX BUFFER	04713	MC10188PD/LD
A11U510	156-2019-00	B010100	B030300	MICROCKT,DGTL:QUAD 2-INPUT NOR GATE W/STROB	04713	MC10H100P
A11U510	156-1674-00	B030301		E MICROCKT,DGTL:SCREENED	04713	MC10H104LD
A11U515	156-1674-00	B010100	B030300	MICROCKT,DGTL:SCREENED	04713	MC10H104LD
A11U515	156-2019-00	B030301		MICROCKT,DGTL:QUAD 2-INPUT NOR GATE W/STROB	04713	MC10H100P
A11U520	156-1674-00			E MICROCKT,DGTL:SCREENED	04713	MC10H104LD
A11U525	156-1700-00			MICROCKT,DGTL:ECL,16 X 4 SRAM	07263	F10402DC
A11U530	156-1641-01			MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A11U535	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A11U540	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A11U545	156-0205-02			MICROCKT,DGTL:QUAD 2 INP NOR GATE	04713	MC10102PD/LD
A11U550	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A11U555	156-1710-00			MICROCKT,DGTL:DUAL 2-WIDE 2-3 INPUT OR-AND/ OR-AND-INV GATE	04713	MC10H117PD
A11U565	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A11U570	156-1667-00			MICROCKT,DGTL:SCREENED	04713	MC10H164LD
A11U580	156-0910-02			MICROCKT,DGTL:DUAL DECADE COUNTER,SCRN	01295	SN74LS390N3
A11U585	156-0910-02			MICROCKT,DGTL:DUAL DECADE COUNTER,SCRN	01295	SN74LS390N3
A11U590	156-0910-02			MICROCKT,DGTL:DUAL DECADE COUNTER,SCRN	01295	SN74LS390N3
A11U595	156-0390-02			MICROCKT,DGTL:DUAL 4/2 LINE DCDR/DEMUX,SCRN	01295	SN74LS155NP3
A11U598	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A11U600	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPT	04713	MC3431P
A11U605	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPT	04713	MC3431P
A11U608	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A11U610	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A11U615	156-1676-00			MICROCKT,DGTL:SCREENED	04713	MC10H107LD
A11U620	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A11Y445	158-0106-00			XTAL UNIT,QTZ:100MHZ,+/-0.0025%,SERIES	33096	H3
A11Y6395	119-1502-00			OSCILLATOR,RF:19.6608MHZ,14 DIP PKG	75378	MX050
A14	670-7523-01	B010100	B030250	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-01
A14	670-7523-02	B030251	B040349	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-02
A14	670-7523-03	B040350	B040403	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-03
A14	670-7523-04	B040404	B040494	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-04
A14	670-7523-05	B040495	B040599	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-05

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A14	670-7523-06	B040600	B040778	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-06
A14	670-7523-07	B040779	B049999	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-07
A14	670-7523-08	B050000	B079999	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-08
A14	670-7523-09	B080000	B091048	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-09
A14	670-7523-10	B091049	B091799	CIRCUIT BD ASSY:TRIGGER	80009	670-7523-10
A14	670-7523-11	B091800		CIRCUIT BD ASSY:TRIGGER	80009	670-7523-11
A14C115	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C120	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C125	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C130	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C132	281-0809-00	B050000		CAP,FXD,CER DI:200 PF,5%,100V	04222	MA101A201JAA
A14C133	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C135	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C150	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C160	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C170	283-0422-00	B010100	B091048	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C175	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C178	283-0422-00	B040350		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C180	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C185	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C190	283-0422-00	B010100	B091048	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C190	290-0891-00	B091049		CAP,FXD,ELCTLT:1UF,+75 -10%,50V	55680	ULA1H010TEA
A14C210	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C235	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C236	281-0791-00	B050000	B091048	CAP,FXD,CER DI:270PF,10%,100V	04222	MA101C271KAA
A14C236	281-0767-00	B091049		CAP,FXD,CER DI:330PF,20%,100V	04222	MA106C331MAA
A14C312	281-0759-00	B010100	B030250	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C312	281-0759-00	B040350	B040494	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C312	281-0819-00	B040495	B040599	CAP,FXD,CER DI:33 PF,5%,50V	04222	GC105A330J
A14C320	283-0422-00	B010100	B049999	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C330	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C333	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C345	281-0759-00	B050000	B091048	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C360	281-0810-00	B030251	B040349	CAP,FXD,CER DI:5.6PF,+/-0.5PF,100V	04222	MA101A5R6DAA
A14C375	281-0759-00			CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C380	281-0765-00	B010100	B091048	CAP,FXD,CER DI:100PF,5%,100V	04222	MA101A101JAA
A14C382	281-0765-00			CAP,FXD,CER DI:100PF,5%,100V	04222	MA101A101JAA
A14C410	281-0759-00	B050000	B091048	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C410	281-0811-00	B091049		CAP,FXD,CER DI:10PF,10%,100V	04222	MA101A100KAA
A14C420	281-0759-00	B040404	B049999	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C425	281-0759-00	B050000	B091048	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C426	281-0759-00	B040600	B049999	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C440	283-0422-00	B010100	B049999	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C462	281-0759-00			CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C490	283-0422-00	B010100	B040349	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C495	283-0422-00	B010100	B040349	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C516	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C525	281-0759-00	B050000		CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C527	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C533	281-0819-00	B091049		CAP,FXD,CER DI:33 PF,5%,50V	04222	GC105A330J
A14C535	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C540	283-0422-00	B010100	B049999	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C550	281-0765-00			CAP,FXD,CER DI:100PF,5%,100V	04222	MA101A101JAA
A14C560	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C610	283-0422-00	B050000		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C612	281-0759-00	B050000		CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14C618	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C632	281-0759-00	B010100	B040349	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A14C633	283-0422-00	B010100	B049999	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C650	281-0811-00	B091800		CAP,FXD,CER DI:10PF,10%,100V	04222	MA101A100KAA
A14C658	317-0101-00	B091800		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14C660	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C665	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A14C680	281-0759-00	B010100	B049999	CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A14CR165	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR295	152-0581-00	B010100	B040349	SEMICON DVC,DI:RECT,SI,20V,1A,A59	04713	1N5817
A14CR295	152-0141-02	B040350		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR340	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14CR495	152-0581-00	B010100	B040349	SEMICON DVC,DI:RECT,SI,20V,1A,A59	04713	1N5817
A14CR585	152-0141-02	B050000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A14DL355	119-1088-00	B010100	B091378	DELAY LINE,ELEC:4NS,100 OHM	01961	PE-20943
A14DL355	119-1088-01	B091379		DELAY LINE,ELEC:4NS,100 OHM	80009	119-1088-01
A14DL356	119-1088-00	B010100	B091378	DELAY LINE,ELEC:4NS,100 OHM	01961	PE-20943
A14DL356	119-1088-01	B091379		DELAY LINE,ELEC:4NS,100 OHM	80009	119-1088-01
A14DL358	119-1416-00	B010100	B049999	DELAY LINE,ELEC:5NS,100 OHM,TAPPED	01961	PE 20661-001
A14DL364	119-1416-00	B010100	B040349	DELAY LINE,ELEC:5NS,100 OHM,TAPPED	01961	PE 20661-001
A14DL364	119-1088-00	B040350	B049999	DELAY LINE,ELEC:4NS,100 OHM	01961	PE-20943
A14DL366	119-1380-00			DELAY LINE,ELEC:10NS,100 OHM,TAPPED,7 SIP	01961	PE 20662
A14DL368	119-1416-00	B040350	B049999	DELAY LINE,ELEC:5NS,100 OHM,TAPPED	01961	PE 20661-001
A14DL368	119-1380-00	B050000		DELAY LINE,ELEC:10NS,100 OHM,TAPPED,7 SIP	01961	PE 20662
A14DL415	119-1416-00	B010100	B049999	DELAY LINE,ELEC:5NS,100 OHM,TAPPED	01961	PE 20661-001
A14DL456	119-1088-00	B040350	B049999	DELAY LINE,ELEC:4NS,100 OHM	01961	PE-20943
A14DL456	119-1380-00	B050000		DELAY LINE,ELEC:10NS,100 OHM,TAPPED,7 SIP	01961	PE 20662
A14DL480	119-1416-00	B091049		DELAY LINE,ELEC:5NS,100 OHM,TAPPED	01961	PE 20661-001
A14DL510	119-1380-00			DELAY LINE,ELEC:10NS,100 OHM,TAPPED,7 SIP	01961	PE 20662
A14DL575	119-1380-00			DELAY LINE,ELEC:10NS,100 OHM,TAPPED,7 SIP	01961	PE 20662
A14J148	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J246	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J255	131-0608-00	B091049		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J310	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J365	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J372	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J375	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 8)	22526	48283-036
A14J375	131-0608-00	B091049		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL (QUANTITY OF 6)	22526	48283-036
A14J385	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J452	131-0608-00	B091049		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J458	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J460	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J510	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J514	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J550	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J615	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14J620	131-2221-00			CONN,RCPT,ELEC:CKT BD,50 CONT,MALE	22526	65626-150
A14J630	131-2221-00			CONN,RCPT,ELEC:CKT BD,50 CONT,MALE	22526	65626-150
A14J633	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14L382	108-0733-00	B040350	B049999	COIL,RF:FIXED,117NH	80009	108-0733-00
A14P148	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A14P246	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A14P255	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A14P365	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A14P372	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A14P375	131-0993-00			BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A14P452	131-0993-00	B091049		BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005
A14P458	131-0993-00	B010100	B091048	BUS,CONDUCTOR:SHUNT ASSEMBLY,BLACK	22526	65474-005

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont.	Name & Description	Mfr. Code	Mfr. Part No.
A14P460	131-0993-00			BUS, CONDUCTOR: SHUNT ASSEMBLY, BLACK	22526	65474-005
A14P510	131-0993-00			BUS, CONDUCTOR: SHUNT ASSEMBLY, BLACK	22526	65474-005
A14P514	131-0993-00			BUS, CONDUCTOR: SHUNT ASSEMBLY, BLACK	22526	65474-005
A14P550	131-0993-00			BUS, CONDUCTOR: SHUNT ASSEMBLY, BLACK	22526	65474-005
A14P615	131-0993-00			BUS, CONDUCTOR: SHUNT ASSEMBLY, BLACK	22526	65474-005
A14R110	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R118	317-0101-00	B010100	B040349	RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A14R118	317-0680-00	B040350	B091048	RES, FXD, CMPSN: 68 OHM, 5%, 0.125W	01121	BB6805
A14R121	317-0101-00	B040350	B091048	RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A14R133	317-0471-00	B050000	B091048	RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A14R133	315-0471-00	B091049		RES, FXD, FILM: 470 OHM, 5%, 0.25W	57668	NTR25J-E470E
A14R136	317-0561-00	B050000	B091048	RES, FXD, CMPSN: 560 OHM, 5%, 0.125W	01121	BB5615
A14R136	315-0561-00	B091049		RES, FXD, FILM: 560 OHM, 5%, 0.25W	19701	5043CX560R0J
A14R140	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R144	317-0151-00	B040350	B049999	RES, FXD, CMPSN: 150 OHM, 5%, 0.125W	01121	BB1515
A14R147	317-0101-00	B010100	B091048	RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A14R147	315-0101-00	B091049		RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A14R148	317-0101-00	B010100	B040349	RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A14R148	317-0680-00	B040350	B091048	RES, FXD, CMPSN: 68 OHM, 5%, 0.125W	01121	BB6805
A14R149	317-0221-00	B040350	B049999	RES, FXD, CMPSN: 220 OHM, 5%, 0.125W	01121	BB2215
A14R155	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R185	315-0101-00	B040350		RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A14R195	315-0101-00	B010100	B040349	RES, FXD, FILM: 100 OHM, 5%, 0.25W	57668	NTR25J-E 100E
A14R215	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R220	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R221	317-0510-00			RES, FXD, CMPSN: 51 OHM, 5%, 0.125W	01121	BB5105
A14R225	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R230	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R233	307-0587-00	B010100	B091048	RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R236	317-0101-00	B010100	B040349	RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A14R236	317-0680-00	B050000	B091048	RES, FXD, CMPSN: 68 OHM, 5%, 0.125W	01121	BB6805
A14R239	317-0680-00	B050000	B091048	RES, FXD, CMPSN: 68 OHM, 5%, 0.125W	01121	BB6805
A14R240	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R242	317-0221-00	B010100	B040349	RES, FXD, CMPSN: 220 OHM, 5%, 0.125W	01121	BB2215
A14R244	317-0151-00	B010100	B040349	RES, FXD, CMPSN: 150 OHM, 5%, 0.125W	01121	BB1515
A14R250	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R258	317-0221-00	B010100	B040349	RES, FXD, CMPSN: 220 OHM, 5%, 0.125W	01121	BB2215
A14R262	317-0680-00	B010100	B091048	RES, FXD, CMPSN: 68 OHM, 5%, 0.125W	01121	BB6805
A14R265	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R275	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R285	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R290	307-0598-00	B010100	B040349	RES NTWK, FXD, FI: 7,330 OHM, 2%, 1.0W	11236	750-81-R330
A14R295	307-0598-00	B040350		RES NTWK, FXD, FI: 7,330 OHM, 2%, 1.0W	11236	750-81-R330
A14R310	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R312	315-0201-00	B010100	B040349	RES, FXD, FILM: 200 OHM, 5%, 0.25W	57668	NTR25J-E200E
A14R312	315-0221-00	B040350	B049999	RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A14R312	315-0120-00	B091049		RES, FXD, FILM: 12 OHM, 5%, 0.25W	57668	NTR25J-R12
A14R314	311-1222-00	B010100	B049999	RES, VAR, NONWW: TRMR, 100 OHM, 0.5W	32997	3386F-T04-101
A14R314	315-0911-00	B091049		RES, FXD, FILM: 910 OHM, 5%, 0.25W	57668	NTR25J-E910E
A14R320	307-0587-00	B050000		RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R325	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R333	317-0271-00	B050000	B091048	RES, FXD, CMPSN: 270 OHM, 5%, 0.125W	01121	BB2715
A14R333	315-0271-00	B091049		RES, FXD, FILM: 270 OHM, 5%, 0.25W	57668	NTR25J-E270E
A14R334	317-0331-00	B050000	B091048	RES, FXD, CMPSN: 330 OHM, 5%, 0.125W	01121	BB3315
A14R334	315-0331-00	B091049		RES, FXD, FILM: 330 OHM, 5%, 0.25W	57668	NTR25J-E330E
A14R335	307-0587-00			RES NTWK, FXD, FI: (7) 68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A14R344	317-0680-00	B050000	B091048	RES, FXD, CMPSN: 68 OHM, 5%, 0.125W	01121	BB6805
A14R345	317-0101-00	B010100	B091048	RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A14R345	315-0101-00	B091049		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R346	317-0101-00	B010100	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R346	317-0680-00	B040350	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R347	317-0680-00	B010100	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R348	317-0101-00	B010100	B030250	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R348	317-0151-00	B030251	B040349	RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A14R348	317-0680-00	B040350	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R348	307-0587-00	B091049		RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R349	317-0680-00	B050000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R358	317-0101-00	B050000	B091048	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R358	315-0101-00	B091049		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R362	317-0221-00	B010100	B049999	RES,FXD,CMPSN:220 OHM,5%,0.125W	01121	BB2215
A14R363	317-0151-00	B030251	B040349	RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A14R364	317-0680-00	B010100	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R365	317-0101-00	B050000	B091048	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R365	315-0101-00	B091049		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R366	311-0622-00	B050000	B091048	RES,VAR,NONWW:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A14R366	311-0605-00	B091049		RES,VAR,NONWW:TRMR,200 OHM,0.5W	32997	3329H-G48-201
A14R370	317-0101-00			RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R371	315-0221-00	B091049		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A14R372	311-0622-00	B010100	B049999	RES,VAR,NONWW:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A14R373	317-0101-00	B010100	B091048	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R373	315-0101-00	B091049		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R374	311-0605-00			RES,VAR,NONWW:TRMR,200 OHM,0.5W	32997	3329H-G48-201
A14R375	317-0102-00	B010100	B049999	RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A14R375	317-0222-00	B050000	B091048	RES,FXD,CMPSN:2.2K OHM,5%,0.125W	01121	BB2225
A14R375	315-0222-00	B091049		RES,FXD,FILM:2.2K OHM,5%,0.25W	57668	NTR25J-E02K2
A14R378	315-0821-00	B010100	B091048	RES,FXD,FILM:820 OHM,5%,0.25W	19701	5043CX820R0J
A14R378	315-0621-00	B091049		RES,FXD,FILM:620 OHM,5%,0.25W	57668	NTR25J-E620E
A14R380	315-0821-00	B010100	B091048	RES,FXD,FILM:820 OHM,5%,0.25W	19701	5043CX820R0J
A14R382	315-0101-00	B010100	B040349	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R382	317-0200-00	B040350	B049999	RES,FXD,CMPSN:20 OHM,5%,0.125W	01121	BB2005
A14R384	315-0680-00	B010100	B091048	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R385	315-0471-00	B010100	B040349	RES,FXD,FILM:470 OHM,5%,0.25W	57668	NTR25J-E470E
A14R385	315-0510-00	B040350		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A14R386	315-0680-00	B040350	B091048	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R388	315-0161-00	B010100	B040349	RES,FXD,FILM:160 OHM,5%,0.25W	57668	NTR25J-E 160E
A14R388	315-0111-00	B040350	B091048	RES,FXD,FILM:110 OHM,5%,0.25W	57668	NTR25J-E110E
A14R388	315-0131-00	B091049		RES,FXD,FILM:130 OHM,5%,0.25W	19701	5043CX130R0J
A14R395	307-0598-00	B040350		RES NTWK,FXD,FI:7,330 OHM,2%,1.0W	11236	750-81-R330
A14R396	315-0111-00	B010100	B040349	RES,FXD,FILM:110 OHM,5%,0.25W	57668	NTR25J-E110E
A14R397	315-0680-00	B010100	B040349	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R410	315-0221-00	B050000	B091048	RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A14R410	315-0111-00	B091049		RES,FXD,FILM:110 OHM,5%,0.25W	57668	NTR25J-E110E
A14R412	315-0511-00	B091049		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A14R413	317-0101-00	B010100	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R414	311-1222-00	B050000	B091048	RES,VAR,NONWW:TRMR,100 OHM,0.5W	32997	3386F-T04-101
A14R414	311-2082-00	B091049		RES,VAR,NONWW:TRMR,200 OHM,10%,0.5W	32997	3386X-T04-201
A14R415	317-0221-00	B030251	B040349	RES,FXD,CMPSN:220 OHM,5%,0.125W	01121	BB2215
A14R417	317-0101-00	B010100	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R420	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R424	315-0102-00	B091049		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A14R425	317-0100-00	B030251	B040349	RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A14R425	317-0101-00	B040600	B049999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R425	315-0151-00	B050000	B091048	RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A14R426	317-0100-00	B040600	B049999	RES,FXD,CMPSN:10 OHM,5%,0.125W	01121	BB1005
A14R428	315-0201-00	B091049		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A14R430	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A14R433	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R435	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R440	317-0101-00	B010100	B049999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R442	317-0101-00	B050000	B091048	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R442	315-0101-00	B091049		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R443	317-0101-00	B010100	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R444	317-0680-00	B050000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R445	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R456	317-0101-00	B010100	B091048	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R456	315-0101-00	B091049		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R458	311-0605-00	B010100	B049999	RES,VAR,NONW:TRMR,200 OHM,0.5W	32997	3329H-G48-201
A14R460	317-0680-00	B040350	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R461	317-0680-00	B040350	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R461	315-0680-00	B091049		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R462	317-0102-00	B010100	B049999	RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A14R462	317-0182-00	B050000	B091048	RES,FXD,CMPSN:1.8K OHM,5%,0.125W	01121	BB1825
A14R462	315-0182-00	B091049		RES,FXD,FILM:1.8K OHM,5%,0.25W	57668	NTR25J-E1K8
A14R465	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R470	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R476	317-0101-00	B050000	B091048	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R476	315-0101-00	B091049		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R478	317-0221-00	B040350	B049999	RES,FXD,CMPSN:220 OHM,5%,0.125W	01121	BB2215
A14R480	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R485	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R490	317-0101-00	B030251	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R491	317-0101-00	B010100	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R493	317-0101-00	B010100	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R495	307-0598-00	B040350		RES NTWK,FXD,FI:7,330 OHM,2%,1.0W	11236	750-81-R330
A14R510	311-1222-00	B050000	B091048	RES,VAR,NONW:TRMR,100 OHM,0.5W	32997	3386F-T04-101
A14R510	311-2082-00	B091049		RES,VAR,NONW:TRMR,200 OHM,10%,0.5W	32997	3386X-T04-201
A14R511	317-0101-00	B010100	B049999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R514	317-0101-00	B040350	B049999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R515	317-0101-00	B010100	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R515	317-0680-00	B040350	B049999	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R515	315-0101-00	B050000		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R516	317-0101-00	B010100	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R517	317-0101-00	B040350	B049999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R518	317-0101-00	B010100	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R519	317-0101-00	B040350	B049999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R520	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R521	317-0101-00	B030251	B040349	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R521	315-0681-00	B091049		RES,FXD,FILM:680 OHM,5%,0.25W	57668	NTR25J-E680E
A14R524	317-0680-00	B050000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R524	315-0101-00	B091049		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R525	317-0561-00	B050000		RES,FXD,CMPSN:560 OHM,5%,0.125W	01121	BB5615
A14R526	317-0182-00	B050000	B091048	RES,FXD,CMPSN:1.8K OHM,5%,0.125W	01121	BB1825
A14R526	315-0272-00	B091049		RES,FXD,FILM:2.7K OHM,5%,0.25W	57668	NTR25J-E02K7
A14R529	317-0680-00	B040350	B049999	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R530	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R533	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R534	317-0680-00	B040350	B049999	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R538	317-0680-00	B050000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R538	315-0680-00	B091049		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R541	317-0101-00	B091049		RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R542	315-0680-00	B091049		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R544	317-0680-00	B050000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R544	315-0680-00	B091049		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R545	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A14R550	317-0101-00			RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R551	311-0605-00			RES,VAR,NONW:TRMR,200 OHM,0.5W	32997	3329H-G48-201
A14R552	317-0221-00			RES,FXD,CMPSN:220 OHM,5%,0.125W	01121	BB2215
A14R553	317-0680-00	B050000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R554	317-0101-00			RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R555	307-0587-00	B050000		RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R565	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R570	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R585	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R586	317-0511-00	B050000	B091048	RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A14R586	315-0111-00	B091049		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A14R587	317-0221-00	B010100	B040349	RES,FXD,CMPSN:220 OHM,5%,0.125W	01121	BB2215
A14R590	307-0598-00	B010100	B040349	RES NTWK,FXD,FI:7,330 OHM,2%,1.0W	11236	750-81-R330
A14R610	311-1222-00	B010100	B040349	RES,VAR,NONW:TRMR,100 OHM,0.5W	32997	3386F-T04-101
A14R610	317-0102-00	B040350	B049999	RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A14R610	311-1222-00	B050000	B091048	RES,VAR,NONW:TRMR,100 OHM,0.5W	32997	3386F-T04-101
A14R610	311-2082-00	B091049		RES,VAR,NONW:TRMR,200 OHM,10%,0.5W	32997	3386X-T04-201
A14R611	315-0101-00	B010100	B040350	RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R611	315-0102-00	B050000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A14R612	311-1222-00	B010100	B040349	RES,VAR,NONW:TRMR,100 OHM,0.5W	32997	3386F-T04-101
A14R612	315-0331-00	B040350		RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A14R613	315-0151-00	B010100	B049999	RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A14R613	315-0470-00	B050000		RES,FXD,FILM:47 OHM,5%,0.25W	57668	NTR25J-E47E0
A14R614	315-0680-00			RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R615	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R616	307-0721-00			RES NTWK,FXD,FI:5,68 OHM,2%,1.5 W	01121	110B680
A14R617	315-0221-00	B040350	B091048	RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A14R617	315-0151-00	B091049		RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A14R618	307-0721-00			RES NTWK,FXD,FI:5,68 OHM,2%,1.5 W	01121	110B680
A14R620	307-0594-00			RES NTWK,FXD,FI:(8)220 OHM,2%,0.125W	11236	750-81-R220
A14R622	315-0221-00	B050000		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A14R624	315-0221-00	B050000		RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A14R625	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R626	307-0721-00			RES NTWK,FXD,FI:5,68 OHM,2%,1.5 W	01121	110B680
A14R628	307-0721-00			RES NTWK,FXD,FI:5,68 OHM,2%,1.5 W	01121	110B680
A14R635	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R636	317-0102-00	B010100	B040349	RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A14R640	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R644	317-0680-00	B040779		RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R645	317-0102-00	B040350	B040778	RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A14R645	317-0101-00	B040779	B091048	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R648	317-0680-00	B050000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R650	317-0102-00	B040404	B040778	RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A14R650	317-0680-00	B040779		RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R651	317-0680-00	B050000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R652	317-0101-00	B010100	B049999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A14R652	317-0680-00	B050000		RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R653	317-0680-00	B050000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R653	315-0680-00	B091049		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R654	317-0680-00	B040779	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R655	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R656	317-0680-00	B080000	B091048	RES,FXD,CMPSN:68 OHM,5%,0.125W	01121	BB6805
A14R656	315-0680-00	B091049		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R657	317-0102-00	B080000	B091048	RES,FXD,CMPSN:1K OHM,5%,0.125W	01121	BB1025
A14R657	315-0102-00	B091049		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A14R665	317-0331-00	B050000	B091048	RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A14R670	307-0811-00			RES NTWK,FXD,FI:6,180 OHM,6,270 OHM	01121	316T110
A14R672	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A14R675	317-0751-00	B010100	B049999	RES,FXD,CMPNSN:750 OHM,5%,0.125W	01121	BB7515
A14R675	317-0680-00	B050000	B091048	RES,FXD,CMPNSN:68 OHM,5%,0.125W	01121	BB6805
A14R676	307-0587-00	B091049		RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R677	317-0680-00	B040350	B091048	RES,FXD,CMPNSN:68 OHM,5%,0.125W	01121	BB6805
A14R679	315-0181-00	B091049		RES,FXD,FILM:180 OHM,5%,0.25W	57668	NTR25J-E180E
A14R680	315-0101-00	B091049		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A14R681	315-0680-00	B030251	B040349	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A14R681	315-0201-00	B091049		RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A14R683	317-0680-00	B040350	B049999	RES,FXD,CMPNSN:68 OHM,5%,0.125W	01121	BB6805
A14R683	317-0101-00	B050000	B091048	RES,FXD,CMPNSN:100 OHM,5%,0.125W	01121	BB1015
A14R684	317-0680-00	B010100	B091048	RES,FXD,CMPNSN:68 OHM,5%,0.125W	01121	BB6805
A14R685	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A14R690	317-0102-00	B040350	B040778	RES,FXD,CMPNSN:1K OHM,5%,0.125W	01121	BB1025
A14R690	317-0680-00	B040779	B091048	RES,FXD,CMPNSN:68 OHM,5%,0.125W	01121	BB6805
A14R695	307-0598-00	B010100	B040349	RES NTWK,FXD,FI:7,330 OHM,2%,1.0W	11236	750-81-R330
A14TP118	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP133	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP148	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP152	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP153	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP160	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP180	131-0608-00	B091049		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP248	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP260	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP262	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP342	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP343	131-0608-00	B091049		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP344	131-0608-00	B091049		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP358	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP516	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP520	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP532	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP534	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP535	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP536	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP538	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP563	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP564	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP565	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP645	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP646	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP648	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP649	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP653	131-0608-00	B010100	B091048	TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP654	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP660	131-0608-00			TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14TP695	131-0608-00	B091049		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A14U110	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A14U115	156-0760-01			MICROCKT,DGTL:QUINT LATCH,SCRN	04713	MC10175P/L
A14U120	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U125	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U130	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U133	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U135	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U140	156-1733-00			MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A14U145	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U150	156-1339-00			MICROCKT,LINER:HIGH SPEED DUAL DIFF COMPTR	18324	NE521N/SUPRII-B
A14U155	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Dscnt	Name & Description	Mfr. Code	Mfr. Part No.
A14U160	156-1038-01	B010100	B080316	MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A14U160	156-2142-00	B080317		MICROCKT,DGTL:ECL,4-BIT COUNTER	04713	MC10H016(P OR L)
A14U165	156-1038-01	B010100	B080316	MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A14U165	156-2142-00	B080317		MICROCKT,DGTL:ECL,4-BIT COUNTER	04713	MC10H016(P OR L)
A14U170	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A14U175	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A14U180	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A14U185	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A14U190	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A14U210	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A14U215	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U220	156-1038-01	B010100	B080316	MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A14U220	156-2142-00	B080317		MICROCKT,DGTL:ECL,4-BIT COUNTER	04713	MC10H016(P OR L)
A14U225	156-1038-01	B010100	B080316	MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A14U225	156-2142-00	B080317		MICROCKT,DGTL:ECL,4-BIT COUNTER	04713	MC10H016(P OR L)
A14U230	156-1038-01	B010100	B080316	MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A14U230	156-2142-00	B080317		MICROCKT,DGTL:ECL,4-BIT COUNTER	04713	MC10H016(P OR L)
A14U233	156-1038-01	B010100	B080316	MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A14U233	156-2142-00	B080317		MICROCKT,DGTL:ECL,4-BIT COUNTER	04713	MC10H016(P OR L)
A14U235	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U240	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A14U245	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U250	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U255	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U260	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U265	156-1641-01			MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A14U270	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A14U275	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A14U280	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A14U285	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A14U290	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A14U295	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A14U315	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U320	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A14U325	156-1682-00			MICROCKT,DGTL:DUAL 4-5 INPUT OR/NOR GATE	04713	MC10H109LD
A14U330	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U333	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U335	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U340	156-1733-00			MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A14U345	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A14U350	156-1674-00			MICROCKT,DGTL:SCREENED	04713	MC10H104LD
A14U360	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U395	156-0469-02	B040350		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A14U415	156-1641-01			MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A14U420	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A14U421	156-1641-01	B010100	B030250	MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A14U425	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U430	156-1710-00			MICROCKT,DGTL:DUAL 2-WIDE 2-3 INPUT OR-AND/ OR-AND-INV GATE	04713	MC10H117PD
A14U433	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U435	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A14U440	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U445	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A14U450	156-1641-01			MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A14U460	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U465	156-1641-01			MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A14U470	156-1642-01	B010100	B091048	MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A14U470	156-1641-01	B091049		MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A14U475	156-1641-01	B010100	B091048	MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A14U475	156-1733-00	B091049		MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A14U480	156-1674-00			MICROCKT,DGTL:SCREENED	04713	MC10H104LD
A14U485	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U490	156-1038-01	B010100	B080316	MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A14U490	156-2142-00	B080317		MICROCKT,DGTL:ECL,4-BIT COUNTER	04713	MC10H016(P OR L)
A14U495	156-0469-02	B040350		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A14U515	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U520	156-1795-00			MICROCKT,DGTL:DUAL 4 TO 1 MUX	04713	MC10H174PD
A14U525	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U530	156-1682-00			MICROCKT,DGTL:DUAL 4-5 INPUT OR/NOR GATE	04713	MC10H109LD
A14U533	156-1674-00			MICROCKT,DGTL:SCREENED	04713	MC10H104LD
A14U535	156-1676-00			MICROCKT,DGTL:SCREENED	04713	MC10H107LD
A14U540	156-1700-01			MICROCKT,DGTL:ECL,16 X 4 SRAM	04713	MC10H145L
A14U545	156-1849-00			MICROCKT,DGTL:ECL,QUAD 2 INPUT OR GATE	04713	MC10H103 PDS
A14U555	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U560	156-1710-00			MICROCKT,DGTL:DUAL 2-WIDE 2-3 INPUT OR-AND/OR-AND-INV GATE	04713	MC10H117PD
A14U565	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U570	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A14U575	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U580	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A14U585	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U586	156-1639-01	B010100	B040349	MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U590	156-1642-01	B010100	B040349	MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A14U590	156-1639-01	B040350		MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U595	156-0469-02	B010100	B040349	MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A14U595	156-1642-01	B040350		MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A14U615	156-0205-02			MICROCKT,DGTL:QUAD 2 INP NOR GATE	04713	MC10102PD/LD
A14U620	156-0743-01			MICROCKT,DGTL:HEX D MA SLAVE FF W/RESET	04713	MC10186PD/LD
A14U625	156-0630-01			MICROCKT,DGTL:HEX INVERTER/BUFFER,SCREENED	04713	MC10195PD/LD
A14U630	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A14U633	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A14U635	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A14U640	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A14U645	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U650	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A14U655	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U660	156-1676-00			MICROCKT,DGTL:SCREENED	04713	MC10H107LD
A14U665	156-1641-01			MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A14U675	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A14U680	156-1641-01	B010100	B091048	MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A14U680	156-1710-00	B091049		MICROCKT,DGTL:DUAL 2-WIDE 2-3 INPUT OR-AND/OR-AND-INV GATE	04713	MC10H117PD
A14U685	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U690	156-1676-00	B010100	B040349	MICROCKT,DGTL:SCREENED	04713	MC10H107LD
A14U690	156-1639-01	B040350		MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U691	156-1639-01	B010100	B040349	MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A14U695	156-0469-02	B010100	B040349	MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A14U695	156-1676-00	B040350		MICROCKT,DGTL:SCREENED	04713	MC10H107LD
A14W618	131-0566-00	B010100	B049999	BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A14Y614	158-0255-00	B040350		XTAL UNIT,QTZ:12.0MHZ 0.015%,SER	33096	CTAT-101411
A14Y634	158-0255-00	B010100	B040349	XTAL UNIT,QTZ:12.0MHZ 0.015%,SER	33096	CTAT-101411
A15	670-7524-01	B010100	B029999	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-01
A15	670-7524-02	B030000	B030494	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-02
A15	670-7524-03	B030495	B039999	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-03

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A15	670-7524-04	B040000	B040497	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-04
A15	670-7524-05	B040498	B040742	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-05
A15	670-7524-06	B040743	B042339	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-06
A15	670-7524-07	B042340	B042612	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-07
A15	670-7524-08	B042613	B044104	CIRCUIT BD ASSY:9 CHANNEL ACQUISITION (D1 ONLY)	80009	670-7524-08
A15	670-7524-09	B044105		CIRCUIT BD ASSY:9 CHAN ACQ (D1 ONLY)	80009	670-7524-09
A15C100	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C115	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C125	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C135	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C152	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C155	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C160	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C170	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C188	281-0792-00			CAP,FXD,CER DI:82PF,10%,100V	04222	MA101A820KAA
A15C190	281-0809-00	B010100	B029999	CAP,FXD,CER DI:200 PF,5%,100V	04222	MA101A201JAA
A15C190	281-0773-00	B030000		CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A15C192	281-0773-00	B010100	B029999	CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A15C192	281-0809-00	B030000		CAP,FXD,CER DI:200 PF,5%,100V	04222	MA101A201JAA
A15C262	281-0814-00			CAP,FXD,CER DI:100 PF,10%,100V	04222	MA101A101KAA
A15C270	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C275	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C280	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A15C281	290-0778-00			CAP,FXD,ELCTLT:1UF,+50 -10%,50V,NPLZD	54473	ECE-A50N1
A15C282	290-0778-00			CAP,FXD,ELCTLT:1UF,+50 -10%,50V,NPLZD	54473	ECE-A50N1
A15C285	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C290	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C294	283-0204-00			CAP,FXD,CER DI:0.01UF,20%,50V	04222	SR155E103MAA
A15C295	281-0773-00	B010100	B044104	CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A15C295	281-0813-00	B044105		CAP,FXD,CER DI:0.047UF,20%,50V	05397	C412C473M5V2CA
A15C310	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C315	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C320	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C330	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C335	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C341	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C345	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C347	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C352	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C355	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C365	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C370	283-0422-00	B010100	B030000	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C375	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C380	290-0778-00			CAP,FXD,ELCTLT:1UF,+50 -10%,50V,NPLZD	54473	ECE-A50N1
A15C385	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C400	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C410	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C414	283-0422-00	B030000		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C420	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C430	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C447	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C455	281-0862-00	B040498	B042612	CAP,FXD,CER DI:0.001UF,+80-20%,100V	04222	MA101C10ZMAA
A15C455	281-0765-00	B042613		CAP,FXD,CER DI:100PF,5%,100V	04222	MA101A101JAA

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A15C456	281-0862-00	B040498	B042612	CAP,FXD,CER DI:0.001UF,+80-20%,100V	04222	MA101C10ZMAA
A15C456	281-0765-00	B042613		CAP,FXD,CER DI:100PF,5%,100V	04222	MA101A101JAA
A15C457	283-0422-00	B030000		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C460	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C470	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C475	283-0422-00		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA	
A15C480	283-0422-00				CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222
A15C490	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C510	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C515	283-0422-00	B030000		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C535	283-0422-00	B030000		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C538	283-0422-00	B030000		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C565	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C575	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C608	283-0422-00	B030000		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C618	283-0422-00	B030000		CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15C695	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A15CR250	152-0141-02	B030000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR270	152-0141-02	B030300		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR271	152-0141-02	B030300	B030299	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR286	152-0581-00	B010100		SEMICON DVC,DI:RECT,SI,20V,1A,A59	04713	1N5817
A15CR286	152-0141-02	B020300		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR291	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR293	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR294	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR295	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR310	152-0141-02	B010100	B030299	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR350	152-0141-02	B010100	B029999	SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A15CR678	152-0322-00			SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A15CR678	152-0322-00			SEMICON DVC,DI:SCHOTTKY,SI,15V,1.2PF,DO-35	50434	5082-2672
A15DL360	119-1088-00			DELAY LINE,ELEC:4NS,100 OHM	01961	PE-20943
A15L294	108-0520-00			COIL,RF:FIXED,2.2UH	80009	108-0520-00
A15L295	108-0520-00			COIL,RF:FIXED,2.2UH	80009	108-0520-00
A15Q475	151-0341-00			TRANSISTOR:NPN,SI,TO-106	04713	SPS6919
A15Q600	151-0342-00			TRANSISTOR:PNP,SI,TO-92	07263	S035928
A15Q605	151-0342-00			TRANSISTOR:PNP,SI,TO-92	07263	S035928
A15Q608	151-0342-00			TRANSISTOR:PNP,SI,TO-92	07263	S035928
A15Q610	151-0342-00			TRANSISTOR:PNP,SI,TO-92	07263	S035928
A15Q615	151-0342-00			TRANSISTOR:PNP,SI,TO-92	07263	S035928
A15Q618	151-0342-00			TRANSISTOR:PNP,SI,TO-92	07263	S035928
A15Q620	151-0342-00			TRANSISTOR:PNP,SI,TO-92	07263	S035928
A15Q625	151-0342-00			TRANSISTOR:PNP,SI,TO-92	07263	S035928
A15Q628	151-0342-00			TRANSISTOR:PNP,SI,TO-92	07263	S035928
A15R100	307-0640-00			RES NTWK,FXD,FI:9.50 OHM,5%,0.125 W	11236	750-101-R50
A15R115	307-0489-00			RES NTWK,FXD,FI:7.100 OHM,20%,1.0W	11236	750-81-R100
A15R120	307-0489-00			RES NTWK,FXD,FI:7.100 OHM,20%,1.0W	11236	750-81-R100
A15R135	307-0486-00			RES NTWK,FXD,FI:100 OHM,20%,1.125W	11236	750-101-R100 OHM
A15R150	307-0489-00			RES NTWK,FXD,FI:7.100 OHM,20%,1.0W	11236	750-81-R100
A15R165	307-0503-00			RES NTWK,FXD,FI:(9) 510 OHM,20%,0.125W	11236	750-101-R510
A15R180	311-1245-00			RES,VAR,NONWW:TRMR,10K OHM,0.5W	32997	3386X-DY6-103
A15R181	311-1236-00	B010100	B042339	RES,VAR,NONWW:TRMR,250 OHM,0.5W	32997	3386X-T07-251
A15R181	311-1248-00	B042340		RES,VAR,NONWW:TRMR,500 OHM,0.5W	32997	3386X-T07-501
A15R182	315-0105-00			RES,FXD,FILM:1M OHM,5%,0.25W	19701	5043CX1M000J
A15R183	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A15R184	321-0777-03	B010100		B042339	RES,FXD,FILM:5.14K OHM,0.25%,0.125W,TC=T2	19701
A15R184	321-0260-09	B042340		RES,FXD,FILM:4.99K OHM,1%,.125W,TC=T9	01121	ORDER BY DESC
A15R185	315-0203-00			RES,FXD,FILM:20K OHM,5%,0.25W	57668	NTR25J-E 20K
A15R186	321-0763-07	B010100	B042339	RES,FXD,FILM:1.12K OHM,0.1%,0.125W,TC=T9	19701	5033RE1K120B

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A15R186	321-0159-08	B042340		RES,FXD,FILM:442 OHM,1%,0.125W,TC=T2	19701	5033RC442ROF
A15R190	321-0414-04			RES,FXD,FILM:200K OHM,0.1%,0.125W,TC=T2	19701	5033RC200K0B
A15R191	321-0924-07			RES,FXD,FILM:40K OHM,0.1%,0.125W,TC=T9	19701	5033RE40K00B
A15R257	307-0489-00			RES NTWK,FXD,FI:7,100 OHM,20%,1.0W	11236	750-81-R100
A15R280	321-0318-07			RES,FXD,FILM:20.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE20K00BCM
A15R281	321-0318-07			RES,FXD,FILM:20.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE20K00BCM
A15R282	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A15R290	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A15R291	315-0392-00			RES,FXD,FILM:3.9K OHM,5%,0.25W	57668	NTR25J-E03K9
A15R295	317-0510-00	B040743	B044104	RES,FXD,CMPSN:51 OHM,5%,0.125W	01121	BB5105
A15R295	315-0510-00	B044105		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A15R300	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R305	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R315	307-0486-00			RES NTWK,FXD,FI:100 OHM,20%,1.125W	11236	750-101-R100 OHM
A15R322	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A15R325	315-0101-00	B040000		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A15R330	307-0486-00			RES NTWK,FXD,FI:100 OHM,20%,1.125W	11236	750-101-R100 OHM
A15R331	315-0510-00	B044105		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A15R338	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A15R342	307-0488-00			RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A15R346	307-0488-00			RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A15R350	317-0511-00	B030300	B044104	RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A15R350	315-0511-00	B044105		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R352	307-0488-00			RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A15R376	317-0202-00	B030300	B044104	RES,FXD,CMPSN:2K OHM,5%,0.125W	01121	BB2025
A15R376	315-0202-00	B044105		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A15R377	315-0511-00	B030000		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R378	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R379	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R380	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R381	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R382	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R383	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R384	317-0103-00	B010100	B029999	RES,FXD,CMPSN:10K OHM,5%,0.125W	01121	BB1035
A15R384	315-0103-00	B030000		RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A15R385	307-0539-00			RES NTWK,FXD,FI:(7)510 OHM,10%,1W	11236	750-81-R510 OHM
A15R395	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R397	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R400	307-0486-00			RES NTWK,FXD,FI:100 OHM,20%,1.125W	11236	750-101-R100 OHM
A15R401	315-0101-00	B044105		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A15R415	315-0101-00	B040000		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A15R430	307-0489-00			RES NTWK,FXD,FI:7,100 OHM,20%,1.0W	11236	750-81-R100
A15R437	317-0151-00			RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A15R442	307-0488-00			RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A15R443	317-0301-00	B010100	B029999	RES,FXD,CMPSN:300 OHM,5%,0.125W	01121	BB3015
A15R451	317-0151-00	B010100	B029999	RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A15R452	317-0151-00	B010100	B029999	RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A15R456	307-0488-00			RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A15R475	307-0503-00			RES NTWK,FXD,FI:(9) 510 OHM,20%,0.125W	11236	750-101-R510
A15R480	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R482	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R485	307-0503-00			RES NTWK,FXD,FI:(9) 510 OHM,20%,0.125W	11236	750-101-R510
A15R490	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R530	315-0620-00	B030000		RES,FXD,FILM:62 OHM,5%,0.25W	19701	5043CX63R00J
A15R531	315-0151-00			RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A15R532	315-0151-00			RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A15R533	315-0620-00			RES,FXD,FILM:62 OHM,5%,0.25W	19701	5043CX63R00J
A15R534	315-0201-00	B010100	B029999	RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A15R534	315-0511-00	B030000		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R535	315-0511-00	B030000		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A15R536	315-0620-00	B010100	B029999	RES,FXD,FILM:62 OHM,5%,0.25W	19701	5043CX63R00J
A15R536	315-0200-00	B030000		RES,FXD,FILM:20 OHM,5%,0.25W	19701	5043CX20R00J
A15R538	307-0486-00	B010100	B029999	RES NTWK,FXD,FI:100 OHM,20%,1.125W	11236	750-101-R100 OHM
A15R538	307-0488-00	B030000		RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A15R546	307-0488-00			RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A15R556	307-0488-00			RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A15R565	307-0486-00			RES NTWK,FXD,FI:100 OHM,20%,1.125W	11236	750-101-R100 OHM
A15R570	307-0489-00			RES NTWK,FXD,FI:7,100 OHM,20%,1.0W	11236	750-81-R100
A15R575	307-0489-00			RES NTWK,FXD,FI:7,100 OHM,20%,1.0W	11236	750-81-R100
A15R593	317-0511-00	B010100	B029999	RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A15R600	307-0445-00			RES NTWK,FXD,FI:4.7K OHM,20%,(9)RES	32997	4310R-101-472
A15R630	307-0489-00	B030000		RES NTWK,FXD,FI:7,100 OHM,20%,1.0W	11236	750-81-R100
A15R635	317-0200-00	B010100	B029999	RES,FXD,CMPSN:20 OHM,5%,0.125W	01121	BB2005
A15TP185	214-0579-00	B010100	B044104	TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A15TP185	131-0608-00	B044105		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A15TP250	131-0608-00	B044105		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A15TP291	214-0579-00	B010100	B044104	TERM,TEST POINT:BRS CD PL	80009	214-0579-00
A15TP291	131-0608-00	B044105		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A15TP325	131-0608-00	B044105		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A15TP665	131-0608-00	B044105		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A15U100	156-1635-00	B010100	B041497	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A15U100	156-2172-00	B041498		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A15U115	156-1635-00	B010100	B041497	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A15U115	156-2172-00	B041498		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A15U120	156-1635-00	B010100	B041497	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A15U120	156-2172-00	B041498		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A15U125	156-1635-00	B010100	B041497	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A15U125	156-2172-00	B041498		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A15U135	156-1635-00	B010100	B041497	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A15U135	156-2172-00	B041498		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A15U140	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A15U145	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A15U150	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A15U155	156-0295-02			MICROCKT,DGTL:TRIPLE 2-INP EXCL OR EXCL NOR	04713	MC10107PD/LD
A15U160	156-1226-00			MICROCKT,LINEAR:DUAL COMPARATOR	18324	LM319F
A15U165	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A15U170	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A15U175	156-1311-00	B010100	B042339	MICROCKT,LINEAR:D/A CONVERTER	18324	NE5018N-11B
A15U175	156-1311-01	B042340		MICROCKT,LINEAR:D/A CONVERTER	18324	NE5018NB
A15U245	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A15U250	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A15U255	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A15U260	156-1641-01			MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A15U265	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPTR	04713	MC3431P
A15U270	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A15U275	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A15U290	156-0385-02			MICROCKT,DGTL:HEX INVERTER,SCRN	07263	74LS04PCQR
A15U295	156-1191-01			MICROCKT,LINEAR:DUAL BI-FET OP-AMP,8 DIP	80009	156-1191-01
A15U300	156-0579-02			MICROCKT,DGTL:DUAL 4 BIT BIN COUNTER,SCRN	02735	CD4520BFX
A15U310	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A15U315	156-0543-01			MICROCKT,DGTL:HEX BUFFER	04713	MC10188PD/LD
A15U320	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A15U330	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A15U335	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A15U340	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A15U345	156-1674-00			MICROCKT,DGTL:SCREENED	04713	MC10H104LD

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A15U350	156-1641-01			MICROCKT,DGTL:SCREENED	04713	MC10H102(LDORPD)
A15U355	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A15U390	156-0784-02			MICROCKT,DGTL:SYNC 4-BIT BINARY COUNTER	01295	SN74LS163AN P3
A15U410	156-1685-00			MICROCKT,DGTL:ECL,1024 X 1 SRAM	TK1015	HM2112-1
A15U415	156-1685-00			MICROCKT,DGTL:ECL,1024 X 1 SRAM	TK1015	HM2112-1
A15U420	156-0543-01			MICROCKT,DGTL:HEX BUFFER	04713	MC10188PD/LD
A15U425	156-1685-00			MICROCKT,DGTL:ECL,1024 X 1 SRAM	TK1015	HM2112-1
A15U430	156-0543-01			MICROCKT,DGTL:HEX BUFFER	04713	MC10188PD/LD
A15U435	156-1685-00			MICROCKT,DGTL:ECL,1024 X 1 SRAM	TK1015	HM2112-1
A15U440	156-1733-00	B010100	B029999	MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A15U440	156-1642-01	B030000		MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A15U445	156-1710-00			MICROCKT,DGTL:DUAL 2-WIDE 2-3 INPUT OR-AND/ OR-AND-INV GATE	04713	MC10H117PD
A15U450	156-1733-00			MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A15U455	156-1795-00			MICROCKT,DGTL:DUAL 4 TO 1 MUX	04713	MC10H174PD
A15U475	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A15U480	156-1277-00			MICROCKT,DGTL:LSTTL,3-STATE OCTAL BFR,SCRN	27014	DM81LS95ANA+
A15U490	156-0734-02			MICROCKT,DGTL:4-BIT R-SHF,L-SHF RGTR	01295	SN74LS295BNP3
A15U495	156-0734-02			MICROCKT,DGTL:4-BIT R-SHF,L-SHF RGTR	01295	SN74LS295BNP3
A15U500	155-0270-00			MICROCKT,DGTL:FRONT END CIRCUIT	80009	155-0270-00
A15U510	155-0270-00			MICROCKT,DGTL:FRONT END CIRCUIT	80009	155-0270-00
A15U520	155-0270-00			MICROCKT,DGTL:FRONT END CIRCUIT	80009	155-0270-00
A15U535	156-1733-00			MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A15U540	156-1710-00			MICROCKT,DGTL:DUAL 2-WIDE 2-3 INPUT OR-AND/ OR-AND-INV GATE	04713	MC10H117PD
A15U545	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A15U550	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A15U555	156-1710-00			MICROCKT,DGTL:DUAL 2-WIDE 2-3 INPUT OR-AND/ OR-AND-INV GATE	04713	MC10H117PD
A15U560	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A15U565	156-0743-01			MICROCKT,DGTL:HEX D MA SLAVE FF W/RESET	04713	MC10186PD/LD
A15U570	156-0743-01			MICROCKT,DGTL:HEX D MA SLAVE FF W/RESET	04713	MC10186PD/LD
A15U575	156-0743-01			MICROCKT,DGTL:HEX D MA SLAVE FF W/RESET	04713	MC10186PD/LD
A15U580	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A15U590	156-0469-02			MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A15U595	156-1111-02			MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A15U630	156-1640-01	B010100	B029999	MICROCKT,DGTL:SCREENED	04713	MC10H116(LDORPD)
A15U630	156-1682-00	B030000		MICROCKT,DGTL:DUAL 4-5 INPUT OR/NOR GATE	04713	MC10H109LD
A15U635	156-1682-00	B010100	B029999	MICROCKT,DGTL:DUAL 4-5 INPUT OR/NOR GATE	04713	MC10H109LD
A15U635	156-1640-01	B030000		MICROCKT,DGTL:SCREENED	04713	MC10H116(LDORPD)
A15W310	131-0566-00	B010100	B044104	BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	OMA 07
A16	670-7703-01	B010100	B029999	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-01
A16	670-7703-02	B030000	B030451	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-02
A16	670-7703-03	B030452	B039999	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-03
A16	670-7703-04	B040000	B043399	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-04
A16	670-7703-05	B043400	B044131	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-05
A16	670-7703-06	B044132	B045947	CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-06
A16	670-7703-07	B045948		CIRCUIT BD ASSY:18 CHANNEL ACQUISITION (D2 ONLY)	80009	670-7703-07
A16C101	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C102	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C103	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C110	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C117	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No.		Name & Description	Mfr. Code	Mfr. Part No.
		Effective	Discont			
A16C129	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C136	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C142	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C143	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C144	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C145	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C146	281-0773-00			CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A16C152	281-0773-00			CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A16C162	290-0177-00			CAP,FXD,ELCTLT:1UF,20%,50V	05397	T320A105M050AS
A16C163	290-0177-00			CAP,FXD,ELCTLT:1UF,20%,50V	05397	T320A105M050AS
A16C164	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A16C165	281-0792-00			CAP,FXD,CER DI:82PF,10%,100V	04222	MA101A820KAA
A16C203	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C207	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C210	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C215	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C220	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C222	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C223	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C234	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C243	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C244	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C245	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C246	281-0773-00			CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A16C247	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C252	281-0773-00			CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A16C254	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C261	281-0820-00	B010100	B029999	CAP,FXD,CER DI:680 PF,10%,50V	04222	MA105C651KAA
A16C263	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C264	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C267	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C303	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C308	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C311	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C312	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C315	283-0182-00			CAP,FXD,CER DI:51PF,5%,400V	04222	3429 400A 510J
A16C316	283-0182-00			CAP,FXD,CER DI:51PF,5%,400V	04222	3429 400A 510J
A16C320	283-0154-00			CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A16C321	283-0154-00			CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A16C329	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C333	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C339	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C340	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C347	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C354	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C359	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C364	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C402	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C404	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C410	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C418	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C421	283-0154-00	B010100	B029999	CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A16C422	283-0154-00	B010100	B029999	CAP,FXD,CER DI:22PF,5%,50V	04222	SR155A220JAA
A16C423	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C429	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C430	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C453	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C455	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A16C463	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C501	281-0773-00			CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A16C502	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C507	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C510	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C512	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C517	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C520	281-0759-00	B030000		CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A16C521	281-0759-00	B030000		CAP,FXD,CER DI:22PF,10%,100V	04222	MA101A220KAA
A16C522	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C523	281-0773-00			CAP,FXD,CER DI:0.01UF,10%,100V	04222	MA201C103KAA
A16C524	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C532	283-0422-00	B010100	B029999	CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C534	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C540	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C546	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C555	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C559	283-0422-00			CAP,FXD,CER DI:0.047UF,+80-20%,50V	04222	MD015E473ZAA
A16C567	290-0177-00	B010100	B029999	CAP,FXD,ELCTLT:1UF,20%,50V	05397	T320A105M050AS
A16C567	290-0284-00	B030000		CAP,FXD,ELCTLT:4.7UF,10%,35V	05397	T110B475K035AS
A16CR113	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16CR144	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16CR145	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16CR148	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16CR149	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16CR166	152-0322-00			SEMICON DVC,DI:Schottky,SI,15V,1.2PF,DO-35	50434	5082-2672
A16CR244	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16CR245	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16CR248	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16CR249	152-0141-02			SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16CR259	152-0322-00			SEMICON DVC,DI:Schottky,SI,15V,1.2PF,DO-35	50434	5082-2672
A16CR567	152-0581-00	B010100	B029999	SEMICON DVC,DI:RECT,SI,20V,1A,A59	04713	1N5817
A16CR567	152-0141-02	B030000		SEMICON DVC,DI:SW,SI,30V,150MA,30V,DO-35	03508	DA2527 (1N4152)
A16L160	108-0520-00			COIL,RF:FIXED,2.2UH	80009	108-0520-00
A16L161	108-0520-00			COIL,RF:FIXED,2.2UH	80009	108-0520-00
A16Q352	151-0190-00	B030000		TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A16Q353	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A16R101	307-0587-00	B010100	B029999	RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R102	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R103	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R104	317-0512-00	B010100	B029999	RES,FXD,CMPSN:5.1K OHM,5%,0.125	01121	BB5125
A16R104	315-0512-00	B030000		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A16R112	317-0512-00	B010100	B029999	RES,FXD,CMPSN:5.1K OHM,5%,0.125	01121	BB5125
A16R112	315-0512-00	B030000		RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A16R131	317-0101-00	B010100	B029999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A16R132	317-0101-00	B010100	B029999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A16R133	317-0101-00	B010100	B029999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A16R134	317-0101-00	B010100	B029999	RES,FXD,CMPSN:100 OHM,5%,0.125W	01121	BB1015
A16R142	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R144	321-0924-07			RES,FXD,FILM:40K OHM,0.1%,0.125W,TC=T9	19701	5033RE40K00B
A16R145	321-0414-00			RES,FXD,FILM:200K OHM,1%,0.125W,TC=T0	07716	CEAD20002F
A16R146	321-0924-07			RES,FXD,FILM:40K OHM,0.1%,0.125W,TC=T9	19701	5033RE40K00B
A16R147	315-0392-00			RES,FXD,FILM:3.9K OHM,5%,0.25W	57668	NTR25J-E03K9
A16R148	321-0318-07			RES,FXD,FILM:20.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE20K00BCM
A16R149	321-0318-07			RES,FXD,FILM:20.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE20K00BCM
A16R150	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A16R151	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A16R152	321-0318-07			RES,FXD,FILM:20.0K OHM,0.1%,0.125W,TC=T9	19701	5033RE20K00BCM

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A16R153	311-1244-00	B010100	B043399	RES, VAR, NONW: TRMR, 100 OHM, 0.5W	32997	3386X-T07-101
A16R153	311-1248-00	B043400		RES, VAR, NONW: TRMR, 500 OHM, 0.5W	32997	3386X-T07-501
A16R154	317-0510-00	B010100	B029999	RES, FXD, CMPSN: 51 OHM, 5%, 0.125W	01121	BB5105
A16R154	315-0510-00	B030000		RES, FXD, FILM: 51 OHM, 5%, 0.25W	19701	5043CX51R00J
A16R156	321-1701-04	B010100	B043399	RES, FXD, FILM: 5.22K OHM, 0.1%, 0.125W, TC=T2	07716	CEAC52200B
A16R156	321-0260-09	B043400		RES, FXD, FILM: 4.99K OHM, 1%, .125W, TC=T9	01121	ORDER BY DESCR
A16R157	321-0201-00	B010100	B043399	RES, FXD, FILM: 1.21K OHM, 1%, 0.125W, TC=T0	19701	5043ED1K210F
A16R157	321-0159-08	B043400		RES, FXD, FILM: 442 OHM, 1%, 0.125W, TC=T2	19701	5033RC442R0F
A16R158	315-0105-00			RES, FXD, FILM: 1M OHM, 5%, 0.25W	19701	5043CX1M000J
A16R161	311-1245-00			RES, VAR, NONW: TRMR, 10K OHM, 0.5W	32997	3386X-DY6-103
A16R167	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A16R201	307-0587-00	B030000		RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R203	317-0301-00	B030000	B039999	RES, FXD, CMPSN: 300 OHM, 5%, 0.125W	01121	BB3015
A16R203	315-0301-00	B040000		RES, FXD, FILM: 300 OHM, 5%, 0.25W	57668	NTR25J-E300E
A16R204	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R209	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R212	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R216	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R220	315-0680-00			RES, FXD, FILM: 68 OHM, 5%, 0.25W	57668	NTR25J-E68E0
A16R221	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R225	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R229	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R234	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R237	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R242	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R243	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R244	321-0414-00			RES, FXD, FILM: 200K OHM, 1%, 0.125W, TC=T0	07716	CEAD20002F
A16R247	315-0392-00			RES, FXD, FILM: 3.9K OHM, 5%, 0.25W	57668	NTR25J-E03K9
A16R248	321-0318-07			RES, FXD, FILM: 20.0K OHM, 0.1%, 0.125W, TC=T9	19701	5033RE20K00BCM
A16R249	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A16R250	315-0103-00			RES, FXD, FILM: 10K OHM, 5%, 0.25W	19701	5043CX10K00J
A16R251	317-0471-00	B010100	B029999	RES, FXD, CMPSN: 470 OHM, 5%, 0.125W	01121	BB4715
A16R252	317-0510-00	B010100	B029999	RES, FXD, CMPSN: 51 OHM, 5%, 0.125W	01121	BB5105
A16R252	315-0510-00	B030000		RES, FXD, FILM: 51 OHM, 5%, 0.25W	19701	5043CX51R00J
A16R253	315-0221-00	B010100	B029999	RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A16R253	315-0182-00	B030000		RES, FXD, FILM: 1.8K OHM, 5%, 0.25W	57668	NTR25J-E1K8
A16R255	315-0221-00	B010100	B029999	RES, FXD, FILM: 220 OHM, 5%, 0.25W	57668	NTR25J-E220E
A16R255	315-0182-00	B030000		RES, FXD, FILM: 1.8K OHM, 5%, 0.25W	57668	NTR25J-E1K8
A16R256	315-0471-00	B030000		RES, FXD, FILM: 470 OHM, 5%, 0.25W	57668	NTR25J-E470E
A16R258	315-0392-00	B030000		RES, FXD, FILM: 3.9K OHM, 5%, 0.25W	57668	NTR25J-E03K9
A16R259	317-0511-00	B010100	B029999	RES, FXD, CMPSN: 510 OHM, 5%, 0.125W	01121	BB5115
A16R261	315-0102-00	B043400		RES, FXD, FILM: 1K OHM, 5%, 0.25W	57668	NTR25JE01K0
A16R267	317-0101-00	B010100	B029999	RES, FXD, CMPSN: 100 OHM, 5%, 0.125W	01121	BB1015
A16R300	317-0680-00	B030000	B039999	RES, FXD, CMPSN: 68 OHM, 5%, 0.125W	01121	BB6805
A16R300	315-0680-00	B040000		RES, FXD, FILM: 68 OHM, 5%, 0.25W	57668	NTR25J-E68E0
A16R301	317-0680-00	B030000	B039999	RES, FXD, CMPSN: 68 OHM, 5%, 0.125W	01121	BB6805
A16R301	315-0680-00	B040000		RES, FXD, FILM: 68 OHM, 5%, 0.25W	57668	NTR25J-E68E0
A16R302	317-0301-00	B030000	B039999	RES, FXD, CMPSN: 300 OHM, 5%, 0.125W	01121	BB3015
A16R302	315-0301-00	B040000		RES, FXD, FILM: 300 OHM, 5%, 0.25W	57668	NTR25J-E300E
A16R303	315-0680-00	B010100	B045947	RES, FXD, FILM: 68 OHM, 5%, 0.25W	57668	NTR25J-E68E0
A16R304	315-0680-00			RES, FXD, FILM: 68 OHM, 5%, 0.25W	57668	NTR25J-E68E0
A16R318	307-0896-00			RES NTWK, FXD, FI: 4,330 OHM, 2%, 1W	01121	208B331
A16R320	317-0132-00	B010100	B029999	RES, FXD, CMPSN: 1.3K OHM, 5%, 0.125W	01121	BB1325
A16R320	307-0587-00	B045948		RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R321	317-0132-00	B010100	B029999	RES, FXD, CMPSN: 1.3K OHM, 5%, 0.125W	01121	BB1325
A16R323	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R326	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM
A16R330	307-0587-00			RES NTWK, FXD, FI: (7)68 OHM, 20%, 0.125W	11236	750-81-R68 OHM

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A16R332	315-0132-00	B030000	B045947	RES,FXD,FILM:1.3K OHM,5%,0.25W	57668	NTR25J-E01K3
A16R333	317-0620-00	B030452		RES,FXD,CMPSN:62 OHM,5%,0.125W	01121	BB6205
A16R333	315-0680-00	B045948		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A16R335	315-0132-00	B030000		RES,FXD,FILM:1.3K OHM,5%,0.25W	57668	NTR25J-E01K3
A16R344	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R351	307-0598-00			RES NTWK,FXD,FI:7,330 OHM,2%,1.0W	11236	750-81-R330
A16R353	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A16R355	315-0102-00	B030000		RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A16R356	315-0331-00			RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A16R361	315-0511-00	B030000		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A16R362	315-0101-00	B030000		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A16R363	307-0598-00			RES NTWK,FXD,FI:7,330 OHM,2%,1.0W	11236	750-81-R330
A16R364	315-0331-00			RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A16R365	315-0331-00			RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A16R366	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A16R367	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A16R368	315-0101-00			RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A16R416	315-0680-00	B010100	B029999	RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A16R417	317-0511-00	B010100	B029999	RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A16R418	307-0819-00			RES NTWK,FXD,FI:9,62 OHM,2%,0.15W EACH	11236	750-101-R62
A16R419	307-0824-00			RES NTWK,FXD,FI:4,150 OHM,2%,0.3W EACH	01121	208B151
A16R420	317-0471-00	B010100	B029999	RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A16R420	317-0511-00	B030000	B044131	RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A16R420	307-0943-00	B044132		RES NTWK,FXD,FI:(2)510 OHM,2%,0.25W	91637	CSC04A03-511G
A16R421	317-0471-00	B010100	B029999	RES,FXD,CMPSN:470 OHM,5%,0.125W	01121	BB4715
A16R421	317-0331-00	B030000	B044131	RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A16R421	307-0942-00	B044132		RES NTWK,FXD,FI:(2)330 OHM,2%,0.25W	91637	CSC04A03-331G
A16R422	317-0331-00	B010100	B029999	RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A16R422	315-0151-00	B030000		RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A16R423	317-0331-00	B010100	B029999	RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A16R426	317-0151-00	B010100	B029999	RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A16R427	317-0151-00	B010100	B029999	RES,FXD,CMPSN:150 OHM,5%,0.125W	01121	BB1515
A16R428	317-0511-00	B010100	B029999	RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A16R429	311-0622-00	B010100	B029999	RES,VAR,NONWV:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A16R429	315-0510-00	B030000		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX510R0J
A16R433	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R437	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R440	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R444	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R446	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R450	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R501	315-0680-00			RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A16R503	315-0680-00			RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A16R504	307-0819-00			RES NTWK,FXD,FI:9,62 OHM,2%,0.15W EACH	11236	750-101-R62
A16R505	307-0819-00			RES NTWK,FXD,FI:9,62 OHM,2%,0.15W EACH	11236	750-101-R62
A16R512	307-0819-00			RES NTWK,FXD,FI:9,62 OHM,2%,0.15W EACH	11236	750-101-R62
A16R517	307-0819-00			RES NTWK,FXD,FI:9,62 OHM,2%,0.15W EACH	11236	750-101-R62
A16R519	307-0824-00			RES NTWK,FXD,FI:4,150 OHM,2%,0.3W EACH	01121	208B151
A16R520	317-0331-00	B010100	B029999	RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A16R520	317-0331-00	B030000	B044131	RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A16R520	307-0942-00	B044132		RES NTWK,FXD,FI:(2)330 OHM,2%,0.25W	91637	CSC04A03-331G
A16R521	131-0566-00	B010100	B029999	BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	QMA 07
A16R521	317-0511-00	B030000	B044131	RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115
A16R521	307-0943-00	B044132		RES NTWK,FXD,FI:(2)510 OHM,2%,0.25W	91637	CSC04A03-511G
A16R522	131-0566-00	B010100	B029999	BUS,CONDUCTOR:DUMMY RES,0.094 OD X 0.225 L	24546	QMA 07
A16R522	315-0151-00	B030000		RES,FXD,FILM:150 OHM,5%,0.25W	57668	NTR25J-E150E
A16R523	317-0331-00	B010100	B029999	RES,FXD,CMPSN:330 OHM,5%,0.125W	01121	BB3315
A16R523	317-0511-00	B030000	B045947	RES,FXD,CMPSN:510 OHM,5%,0.125W	01121	BB5115

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A16R523	315-0511-00	B045948		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A16R524	317-0471-00	B010100	8029999	RES,FXD,CMPNS:470 OHM,5%,0.125W	01121	BB4715
A16R524	317-0511-00	B030000	8045947	RES,FXD,CMPNS:510 OHM,5%,0.125W	01121	BB5115
A16R524	315-0511-00	B045948		RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A16R525	317-0471-00	B010100	8029999	RES,FXD,CMPNS:470 OHM,5%,0.125W	01121	BB4715
A16R529	311-0622-00	B010100	8029999	RES,VAR,NONNW:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A16R529	315-0510-00	B030000		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A16R530	311-0622-00	B010100	8029999	RES,VAR,NONNW:TRMR,100 OHM,0.5W	32997	3329H-L58-101
A16R530	315-0510-00	B030000		RES,FXD,FILM:51 OHM,5%,0.25W	19701	5043CX51R00J
A16R532	317-0620-00	B030000	8045947	RES,FXD,CMPNS:62 OHM,5%,0.125W	01121	BB6205
A16R532	315-0680-00	B045948		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A16R533	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R535	317-0620-00	B030000	8045947	RES,FXD,CMPNS:62 OHM,5%,0.125W	01121	BB6205
A16R535	315-0680-00	B045948		RES,FXD,FILM:68 OHM,5%,0.25W	57668	NTR25J-E68E0
A16R537	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R540	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R544	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R546	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R547	317-0101-00	B010100	8029999	RES,FXD,CMPNS:100 OHM,5%,0.125W	01121	BB1015
A16R547	315-0101-00	B030000		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A16R550	307-0587-00			RES NTWK,FXD,FI:(7)68 OHM,20%,0.125W	11236	750-81-R68 OHM
A16R551	317-0101-00	B010100	8029999	RES,FXD,CMPNS:100 OHM,5%,0.125W	01121	BB1015
A16R551	315-0101-00	B030000		RES,FXD,FILM:100 OHM,5%,0.25W	57668	NTR25J-E 100E
A16R555	307-0897-00			RES NTWK,FXD,FI:9,330 OHM,2%,1.2W	01121	210A331
A16R564	315-0512-00			RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A16R565	315-0512-00			RES,FXD,FILM:5.1K OHM,5%,0.25W	57668	NTR25J-E05K1
A16R566	315-0331-00			RES,FXD,FILM:330 OHM,5%,0.25W	57668	NTR25J-E330E
A16TP257	131-0608-00	B045948		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A16TP268	131-0608-00	B045948		TERMINAL,PIN:0.365 L X 0.025 BRZ GLD PL	22526	48283-036
A16U105	156-0759-02			MICROCKT,DGTL:QUAD 2-INP OR GATE	04713	MC10103PD/LD
A16U108	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A16U111	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A16U116	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A16U119	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A16U122	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A16U124	156-0687-01			MICROCKT,DGTL:QUAD EXCL OR CMPTR	04713	MC10113PD/LD
A16U127	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A16U131	156-1733-00	B010100	8029999	MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A16U134	156-1038-01			MICROCKT,DGTL:4 BIT BINARY COUNTER	07263	SL81660
A16U137	156-1642-01			MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A16U140	156-0759-02			MICROCKT,DGTL:QUAD 2-INP OR GATE	04713	MC10103PD/LD
A16U153	156-1699-00			MICROCKT,LINER:DUAL BI-FET,OPNL AMPL	01295	TL288CP
A16U154	156-1699-00			MICROCKT,LINER:DUAL BI-FET,OPNL AMPL	01295	TL288CP
A16U156	156-1311-00	B010100	8043399	MICROCKT,LINER:D/A CONVERTER	18324	NE5018N-11B
A16U156	156-1311-01	B043400		MICROCKT,LINER:D/A CONVERTER	18324	NE5018NB
A16U203	156-1635-00	B010100	8042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A16U203	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U207	156-1635-00	B010100	8042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A16U207	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U211	156-1635-00	B010100	8042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A16U211	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U215	156-1635-00	B010100	8042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A16U215	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U219	156-1635-00	B010100	8042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A16U219	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U224	156-1635-00	B010100	8042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A16U224	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U228	156-1635-00	B010100	8042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A16U228	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U232	156-1635-00	B010100	B042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A16U232	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U236	156-1635-00	B010100	B042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A16U236	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U240	156-1635-00	B010100	B042111	MICROCKT,DGTL:256 X 4 SRAM	27014	DM10422A
A16U240	156-2172-00	B042112		MICROCKT,DGTL:ECL,256 X 4 RANDOM ACCESS MEM	04713	MCM10422-L10
A16U246	156-0513-02			MICROCKT,DGTL:CMOS,ANALOG MUX/DEMUX	02735	CD4051BFX
A16U248	156-0513-02			MICROCKT,DGTL:CMOS,ANALOG MUX/DEMUX	02735	CD4051BFX
A16U253	156-0513-02			MICROCKT,DGTL:CMOS,ANALOG MUX/DEMUX	02735	CD4051BFX
A16U257	156-0479-04	B010100	B029999	MICROCKT,DGTL:QUAD 2-INP OR GATE,SCRN	01295	SN74ALS32NP3
A16U257	156-0766-02	B030000		MICROCKT,DGTL:CMOS,QUAD 2-INP OR GATE	27014	MM74C32JA+
A16U261	156-0844-02			MICROCKT,DGTL:SYN 4 BIT CNTR,SCRN	01295	SN74LS161A(NP3)
A16U266	156-1647-00			MICROCKT,DGTL:ML,QUAD HIGH-SPEED V COMPT	04713	MC3431P
A16U303	156-1733-00	B030000		MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A16U307	156-1685-00			MICROCKT,DGTL:ECL,1024 X 1 SRAM	TK1015	HM2112-1
A16U310	156-1685-00			MICROCKT,DGTL:ECL,1024 X 1 SRAM	TK1015	HM2112-1
A16U313	156-1685-00			MICROCKT,DGTL:ECL,1024 X 1 SRAM	TK1015	HM2112-1
A16U317	156-1685-00			MICROCKT,DGTL:ECL,1024 X 1 SRAM	TK1015	HM2112-1
A16U320	156-1682-00	B010100	B045947	MICROCKT,DGTL:DUAL 4-5 INPUT OR/NOR GATE	04713	MC10H109LD
A16U320	156-1642-01	B045948		MICROCKT,DGTL:SCREENED	04713	MC10H105LD
A16U324	156-1682-00			MICROCKT,DGTL:DUAL 4-5 INPUT OR/NOR GATE	04713	MC10H109LD
A16U328	156-1733-00			MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A16U332	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A16U335	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A16U338	156-1710-00			MICROCKT,DGTL:DUAL 2-WIDE 2-3 INPUT OR-AND/ OR-AND-INV GATE	04713	MC10H117PD
A16U346	156-1674-00			MICROCKT,DGTL:SCREENED	04713	MC10H104LD
A16U348	156-0541-02			MICROCKT,DGTL:DUAL 2-TO 4-LINE DCDR/DEMUX	04713	SN74LS139NDS
A16U357	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A16U361	156-0975-02			MICROCKT,DGTL:UNIV SHIFT/STORAGE REGISTER	34335	DM74LS299N-B
A16U402	160-1917-00			MICROCKT,DGTL:MICROCELL,GATE ARRAY,PRGM	01537	MCA600/32205-02
A16U407	160-1917-00			MICROCKT,DGTL:MICROCELL,GATE ARRAY,PRGM	01537	MCA600/32205-02
A16U412	160-1917-00			MICROCKT,DGTL:MICROCELL,GATE ARRAY,PRGM	01537	MCA600/32205-02
A16U417	156-1640-01			MICROCKT,DGTL:SCREENED	04713	MC10H116(LDORPD)
A16U421	156-1674-00			MICROCKT,DGTL:SCREENED	04713	MC10H104LD
A16U425	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A16U428	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A16U432	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A16U435	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A16U438	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A16U442	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A16U445	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A16U448	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A16U453	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A16U457	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A16U461	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A16U466	156-1327-00			MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A16U517	156-1640-01			MICROCKT,DGTL:SCREENED	04713	MC10H116(LDORPD)
A16U521	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A16U525	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A16U528	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A16U532	156-1794-00			MICROCKT,DGTL:10KH H SP EMTR COUPLER LOGIC	04713	MC10H121PD
A16U535	156-1639-01			MICROCKT,DGTL:SCREENED	04713	MC10H131PD
A16U538	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A16U542	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A16U545	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD
A16U548	156-1712-00			MICROCKT,DGTL:HEX D MASTER-SLAVE FF	04713	MC10H176PD

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
A16U553	156-0469-02		MICROCKT,DGTL:3/8 LINE DCDR,SCRN	01295	SN74LS138NP3
A16U557	156-1111-02		MICROCKT,DGTL:OCTAL BUS XCVR W/3 STATE OUT	01295	SN74LS245N3
A16U561	156-1277-00		MICROCKT,DGTL:LSTTL,3-STATE OCTAL BFR,SCRN	27014	DM81LS95ANA+
A16U566	156-1327-00		MICROCKT,DGTL:CMOS,3 STATE OCTAL D FF,SCRN	27014	MM74C374NA+
A21	670-7539-02		CIRCUIT BD ASSY:MAIN EXTENDER (067-1103-02 ONLY.OPT.ACCESSORY)	80009	670-7539-02
A21C100	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C101	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C115	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C120	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C125	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C130	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C150	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C900	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C915	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C920	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C923	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C925	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21C950	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A21R100	315-0332-00		RES,FXD,FILM:3.3K OHM,5%,0.25W	57668	NTR25J-E03K3
A21R101	315-0202-00		RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A21R104	307-0488-00		RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A21R105	307-0488-00		RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A21R115	307-0487-00		RES NTWK,FXD,FI:100 OHM,20%,0.5W	91637	CSC04B01-101J
A21R116	307-0487-00		RES NTWK,FXD,FI:100 OHM,20%,0.5W	91637	CSC04B01-101J
A21U100	156-1338-02		MICROCKT,LINEAR:OPERATIONAL AMPLIFIER,SCRN	01295	NE5534P3
A22	670-8567-00		CIRCUIT BD ASSY:ACQUISITION EXTENDER (067-1103-02 ONLY.OPT.ACCESSORY)	80009	670-8567-00
A22C100	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C105	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C116	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C120	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C125	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C130	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C140	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C150	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C900	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C905	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C915	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C916	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C920	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C923	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C925	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22C950	281-0775-00		CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A22R104	307-0488-00		RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A22R105	307-0488-00		RES NTWK,FXD,FI:5 100 OHM,20%,0.75W	01121	106A1010R706A101
A22R115	307-0487-00		RES NTWK,FXD,FI:100 OHM,20%,0.5W	91637	CSC04B01-101J
A22R116	307-0487-00		RES NTWK,FXD,FI:100 OHM,20%,0.5W	91637	CSC04B01-101J
A22R230	307-0492-00		RES NTWK,FXD,FI:(3) 50 OHM,5%,0.125W	91637	CSC04A01-500J
A22R925	307-0492-00		RES NTWK,FXD,FI:(3) 50 OHM,5%,0.125W	91637	CSC04A01-500J
A22U200	156-1733-00		MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A22U230	156-1733-00		MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A22U830	156-1733-00		MICROCKT,DGTL:QUAD OR/NOR GATE	04713	MC10H101PD
A31	670-7696-00	8010100	CIRCUIT BD ASSY:RS232C (1200C01 ONLY.OPT.ACCESSORY)	80009	670-7696-00
A31	670-7696-01	8020000	CIRCUIT BD ASSY:RS232C (1200C01 ONLY.OPT.ACCESSORY)	80009	670-7696-01
A31C100	281-0823-00		CAP,FXD,CER DI:470PF,10%,50V	04222	MA105A471KAA

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A31C101	281-0823-00			CAP,FXD,CER DI:470PF,10%,50V	04222	MA105A471KAA
A31C103	281-0823-00			CAP,FXD,CER DI:470PF,10%,50V	04222	MA105A471KAA
A31C104	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A31C105	281-0823-00			CAP,FXD,CER DI:470PF,10%,50V	04222	MA105A471KAA
A31C106	281-0823-00			CAP,FXD,CER DI:470PF,10%,50V	04222	MA105A471KAA
A31C108	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A31C109	281-0823-00			CAP,FXD,CER DI:470PF,10%,50V	04222	MA105A471KAA
A31C111	290-0743-00	B020000		CAP,FXD,ELCTLT:100UF,+50%-20%,16WVDC	54473	ECE-B16V100L
A31C116	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A31C118	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A31C120	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A31C130	290-0847-00			CAP,FXD,ELCTLT:47UF,+50%-20%,10WVDC	55680	TLB1A470MAA2
A31C206	281-0823-00			CAP,FXD,CER DI:470PF,10%,50V	04222	MA105A471KAA
A31C208	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A31R100	317-0103-00			RES,FXD,CMPSN:10K OHM,5%,0125W	01121	BB1035
A31U110	156-0878-01			MICROCKT,DGTL:QUAD LINE RCVR,SCREENED	04713	MC1489LDS
A31U116	156-0479-02			MICROCKT,DGTL:QUAD 2-INP OR GATE,SCRN	01295	SN74LS32NP3
A31U120	156-0879-01			MICROCKT,DGTL:QUAD LINE DRIVER SCREENED	04713	MC1488LD
A31U126	160-1915-00	B010100	B019999	MICROCKT,DGTL:16384 X 8 EPROM,PROGRAMMED	80009	160-1915-00
A31U126	160-1915-01	B020000		MICROCKT,DGTL:16384 X 8 EPROM,PRGM	80009	160-1915-01
A31U220	156-1336-01			MICROCKT,DGTL:NMOS,SYNC COMM ELEMENT	27014	INS8250(D OR N)
A32	670-7697-01			CIRCUIT BD ASSY:GP1B (1200C02 ONLY.OPT ACCESSORY)	80009	670-7697-01
A32C135	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A32C146	290-0847-00			CAP,FXD,ELCTLT:47UF,+50%-20%,10WVDC	55680	TLB1A470MAA2
A32C149	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A32C245	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A32C338	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A32DS100	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A32DS300	150-1061-00			LT EMITTING DIO:RED,660NM,50MA MAX	50434	HLMP-1301
A32Q225	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A32Q338	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A32Q345	151-1119-00			TRANSISTOR:FE,N-CHAN,SI,TO-39	81483	IRFF122
A32R100	315-0221-00			RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A32R149	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A32R300	315-0221-00			RES,FXD,FILM:220 OHM,5%,0.25W	57668	NTR25J-E220E
A32R310	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A32R325	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A32R336	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A32R337	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A32R345	315-0202-00			RES,FXD,FILM:2K OHM,5%,0.25W	57668	NTR25J-E 2K
A32U135	156-1444-01			MICROCKT,DGTL:NMOS,GP1B INTFC CONTROLLER	01295	TMS9914A (NL
A32U145	156-0323-02			MICROCKT,DGTL:HEX INVERTER,BURN-IN	18324	N74S04(NB OR FB)
A32U210	156-1415-00	B010100	B020499	MICROCKT,DGTL:TTL,OCTAL GP1B XCVR MGT BUS	01295	SN75161A N
A32U210	156-1415-01	B020500		MICROCKT,DGTL:OCTAL GP1B XCVR-MANAGEMENT	27014	DS75161A NA+
A32U245	160-1916-01			MICROCKT,DGTL:16384 X 8 EPROM,PROGRAMMED	80009	160-1916-01
A32U310	156-1414-01	B010100	B020499	MICROCKT,DGTL:TTL,OCTAL GP1B XCVR DATA BUS	01295	SN75160ANP3
A32U310	156-1414-02	B020500		MICROCKT,DGTL:OCTAL GP1B BUS XCVR,SCRN	27014	DS75160A N
A41	670-7620-00			CIRCUIT BD ASSY:RAM PACK (12RS01 ONLY.OPT.ACCESSORY)	80009	670-7620-00
A41BT115	146-0041-00			BATTERY,DRY:SAFETY CONTROLLED	00681	3440LP
A41C114	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A41C128	290-0743-00			CAP,FXD,ELCTLT:100UF,+50%-20%,16WVDC	54473	ECE-B16V100L
A41C214	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A41CR115	152-0075-00			SEMICON DVC,DI:SW,GE,22V,80MW,DO-7	14433	G866
A41Q204	151-0190-00			TRANSISTOR:NPN,SI,TO-92	80009	151-0190-00
A41Q206	151-0188-00			TRANSISTOR:PNP,SI,TO-92	80009	151-0188-00
A41R100	307-0446-00			RES NTKW,FXD,FI:10K OHM,20%,(9)RES	11236	750-101-R10K

Replaceable Electrical Parts
1240 Service Vol.11

Component No.	Tektronix Part No.	Serial/Assembly No. Effective	Discont	Name & Description	Mfr. Code	Mfr. Part No.
A41R102	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A41R106	307-0542-00			RES NTWK,FXD,FI:(5)10K OHM,5%,0.125W	01121	106A1030R706A103
A41R113	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A41R116	315-0201-00			RES,FXD,FILM:200 OHM,5%,0.25W	57668	NTR25J-E200E
A41R122	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A41R124	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A41R126	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A41R200	315-0103-00			RES,FXD,FILM:10K OHM,5%,0.25W	19701	5043CX10K00J
A41R202	315-0511-00			RES,FXD,FILM:510 OHM,5%,0.25W	19701	5043CX510R0J
A41R213	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A41R215	307-0542-00			RES NTWK,FXD,FI:(5)10K OHM,5%,0.125W	01121	106A1030R706A103
A41R216	315-0102-00			RES,FXD,FILM:1K OHM,5%,0.25W	57668	NTR25JE01K0
A41U110	156-1632-00			MICROCKT,DGTL:CMOS,2048 X 8 SRAM	TK1015	HM6116LP-4
A41U120	156-1632-00			MICROCKT,DGTL:CMOS,2048 X 8 SRAM	TK1015	HM6116LP-4
A41U210	156-1632-00			MICROCKT,DGTL:CMOS,2048 X 8 SRAM	TK1015	HM6116LP-4
A41U220	156-1632-00			MICROCKT,DGTL:CMOS,2048 X 8 SRAM	TK1015	HM6116LP-4
A41VR104	152-0744-00			SEMICON DVC,DI:ZEN,SI,3.6V,5%,0.4W,DO-7	15238	IN747ATK
A42	670-7538-00			CIRCUIT BD ASSY:32K ROM PACK (067-1103-02,12RD01,12RS11 12RS12 ONLY.OPT.ACCESSORY)	80009	670-7538-00
A42C100	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
A42C200	281-0775-00			CAP,FXD,CER DI:0.1UF,20%,50V	04222	MA205E104MAA
	-----			CHASSIS PARTS		
B111	119-1725-00	B010100	B059999	FAN,TUBEAXIAL:8 TO 16V,4W,2800 RPM,120CFM	23936	4112GX
B111	119-1725-01	B060000		FAN,TUBEAXIAL:8 TO 14.5VDC,6W,3200RPM,106CFM	TK1456	4112 KX
F201	159-0014-00	B010100	B079999	FUSE,CARTRIDGE:3AG,5A,250V,0.8SEC	71400	MTH-CW-5
F201	159-0151-00	B080000		FUSE,CARTRIDGE:7A,250V,MEDIUM BLOW	75915	314007
F201	159-0226-00	B010100	B079999	FUSE,CARTRIDGE:2.5A,250V,FAST (OPTIONS A1,A2,A3,A4 & A5 ONLY)	75915	21202.5
F201	159-0017-00	B080000		FUSE,CARTRIDGE:3AG,4A,250V,FAST BLOW (OPTIONS A1,A2,A3,A4 & A5 ONLY)	71400	MTH-CW-4
L600	-----			(PART OF V230)		
R581	311-1064-00			RES,VAR,NONMW:PWL,500 OHM,0.5W	01121	WAIG032S501UA
S181	260-1849-02			SWITCH,PUSH:DPDT,4A,250VAC,W/BRACKET	31918	601005
S235	311-2193-00			ENCODER,DIGITAL:INCREMENTAL,2 CHAN,50PPR/CH	TK0510	EWI-XAK01950B
U100	156-1610-00			MICROCKT,DGTL:NMOS,8192 X 8 EPROM (12RS12 ONLY)	04713	MCM68766C35
U100	160-2001-01	B010100	B019999	MICROCKT,DGTL:8192 X 8 EPROM,PROGRAMMED (12RD01 ONLY)	80009	160-2001-01
U100	160-2001-02	B020000		MICROCKT,DGTL:8192 X 8 EPROM,PRGM (12RD01 ONLY)	80009	160-2001-02
U102	156-1610-00			MICROCKT,DGTL:NMOS,8192 X 8 EPROM (12RS12 ONLY)	04713	MCM68766C35
U102	160-2028-01	B010100	B019999	MICROCKT,DGTL:1240 DIAGNOSTIC ROM #4 (12RD01 ONLY)	80009	160-2028-01
U102	160-2028-02	B020000		MICROCKT,DGTL:8192 X 8 EPROM,PRGM (12RD01 ONLY)	80009	160-2028-02
U200	156-1610-00			MICROCKT,DGTL:NMOS,8192 X 8 EPROM (12RS12 ONLY)	04713	MCM68766C35
U200	160-1574-01	B010100	B019999	MICROCKT,DGTL:8192 X 8 EPROM,PROGRAMMED (12RD01 ONLY)	80009	160-1574-01
U200	160-1574-02	B020000		MICROCKT,DGTL:8192 X 8 EPROM,PRGM (12RD01 ONLY)	80009	160-1574-02
U202	156-1610-00			MICROCKT,DGTL:NMOS,8192 X 8 EPROM (12RS12 ONLY)	04713	MCM68766C35
U202	160-2002-01	B010100	B019999	MICROCKT,DGTL:8192 X 8 EPROM,PROGRAMMED (12RD01 ONLY)	80009	160-2002-01
U202	160-2002-02	B020000		MICROCKT,DGTL:8192 X 8 EPROM,PRGM (12RD01 ONLY)	80009	160-2002-02

Component No.	Tektronix Part No.	Serial/Assembly No. Effective Dscont	Name & Description	Mfr. Code	Mfr. Part No.
			(12RD01 ONLY)		
V230	154-0656-00		ELECTRON TUBE:CRT W/DEFLECTION COIL	62786	86254-P31
W111	175-9077-00		CA ASSY,SP,ELEC:2,26 AWG,TW PR,2-T,0-N	80009	175-9077-00
W121	175-8228-00		CA ASSY,SP,ELEC:50,28 AWG,25.0 L,RIBBON	80009	175-8228-00
W125	175-8371-00		CA ASSY,SP,ELEC:34,28 AWG,27.0 L,RIBBON	22526	ORDER BY DESCR
W181	175-3232-00		CA ASSY,SP,ELEC:2,26 AWG,12.0 L,RIBBON	80009	175-3232-00
W218	175-8229-00		CA ASSY,SP,ELEC:20,28 AWG,5.0 L,RIBBON	80009	175-8229-00
W230	136-0798-00	B010100	SOCKET ASSY,CRT:7 CONT W/LEADS	53628	300-000176
W230	136-0798-01	B091464	SOCKET ASSY,CRT:7 CONT W/LEADS	54422	ORDER BY DESCR
W245	175-2632-00		CA ASSY,SP,ELEC:3,26 AWG,3.0 L	TK1375	ORDER BY DESCR
W421	195-0965-00		LEAD,ELECTRICAL:26 AWG,1.5 L,9-2	80009	195-0965-00
W432	175-3114-00		WIRE,ELECTRICAL:STRD,18 AWG,GRAY,PVC	80009	175-3114-00
W581	175-3402-00		LEAD ASSY,ELEC:4,26 AWG,9.0 L	80009	175-3402-00
W582	175-2640-00		CABLE ASSY,RF:50 OHM COAX,8.0 L,9-1	80009	175-2640-00
W583	175-4329-00		CABLE ASSY,RF:50 OHM COAX,7.0 L,9-2	80009	175-4329-00
W584	175-3989-00		CABLE ASSY,RF:50 OHM COAX,9.0 L,93	80009	175-3989-00